

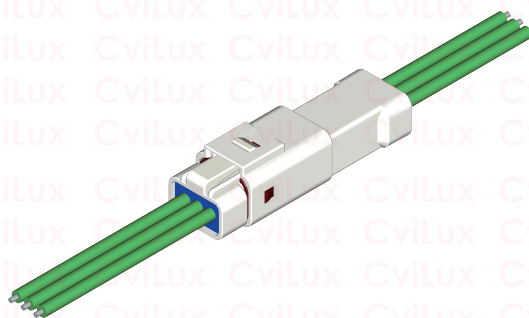






CPB2 Series Waterproof Connector




Series	Picture	Pitch	Row	PIN	Wire Range	Current Rating	IP
CPB2		2.00 mm	Single Row	02, 03, 04	AWG #22~#26	1A~3A	IPX7
			Dual Row	06, 08			

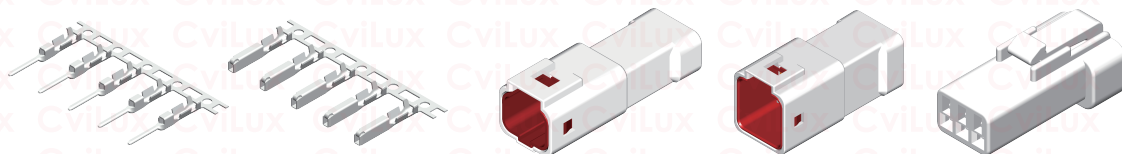

CPB2 2.00mm Wire to Wire Waterproof Connector

Picture	Specification	Materials	Plating	CviLux PN
	Receptacle Housing	Housing: PBT, UL 94V-0	—	CPB202S0R00 CPB203S0R00 CPB204S0R00
	No. of circuits: Single Row: 02, 03, 04 Dual Row: 06, 08	Rubber Seal: Silicone Rubber		CPB206SDR00 CPB208SDR00
	Female Crimp Terminal	Copper alloy	Tin-Plated	CPB2T021PES
	Wire gauge: AWG #22, #24, #26			
	Plug Housing	Housing: PBT, UL 94V-0		CPB202P0R00 CPB203P0R00 CPB204P0R00
	No. of circuits: Single Row: 02, 03, 04 Dual Row: 06, 08	Rubber Seal: Silicone Rubber		CPB206PDR00 CPB208PDR00
	Male Crimp Terminal	Copper alloy	Tin-Plated	CPB2T021BPP
	Wire gauge: AWG #22, #24, #26			

CPB2 Series Waterproof Connector

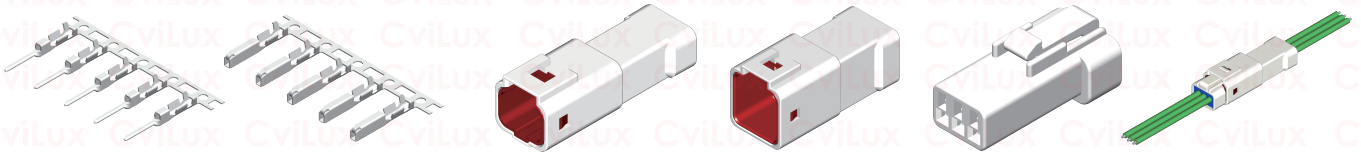


CPB2 series connector can be placed on the devices which is specially waterproof required, for example, outdoor lighting, lawn mower... and so on.



Positive
Locking System



High Reliability



Wire to Wire
connection



IPx7 Rating
performance




Inner Seal
Ring



Rubber Seal

Application

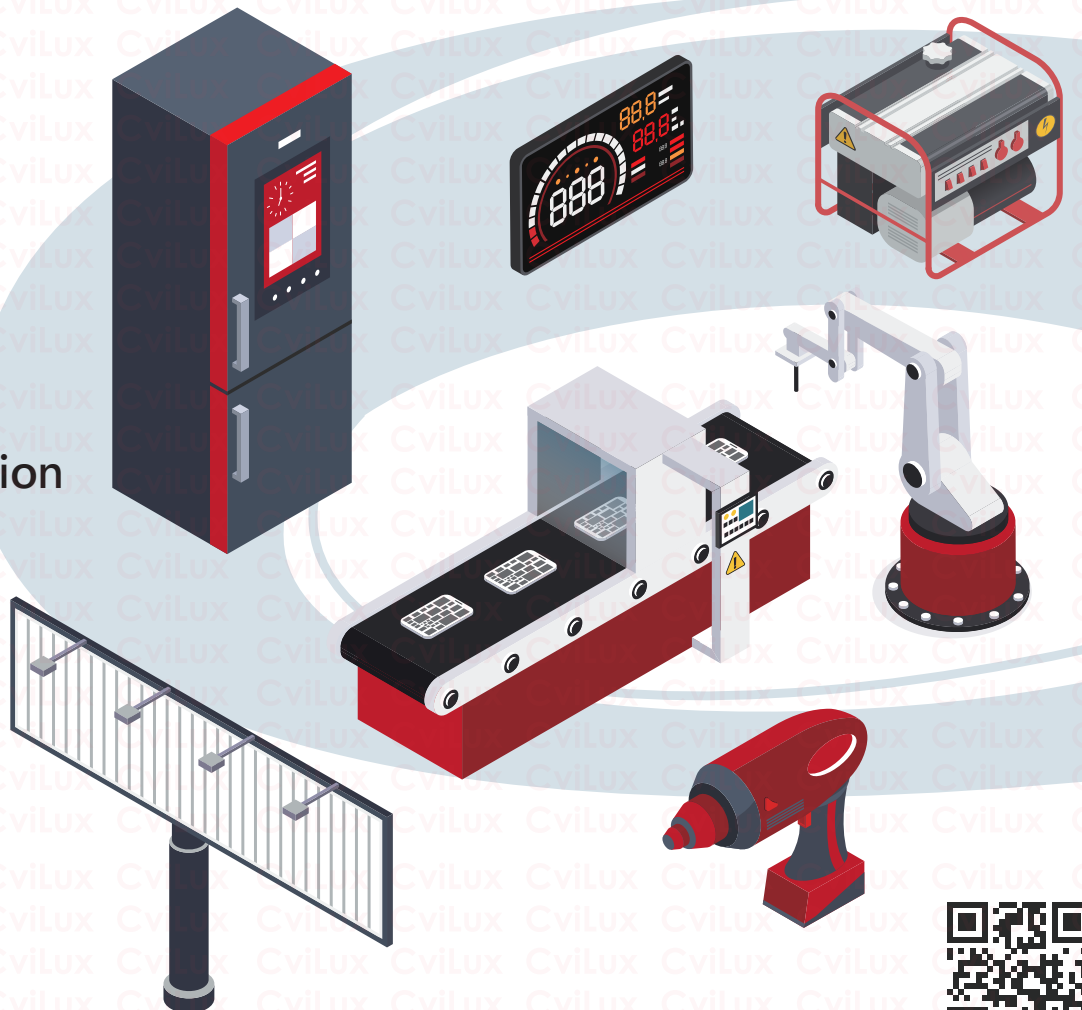

瀚荃集團
CviLux Group
Since 1990



Connect the World, Connect the Future.