

CI19 Series 1.50mm(.059") Wire to Board Connectors SMT Headers



⊙ Insulator: High temperature plastic UL 94V-0, Color Black

RoHS Compliant




CI



Top Entry

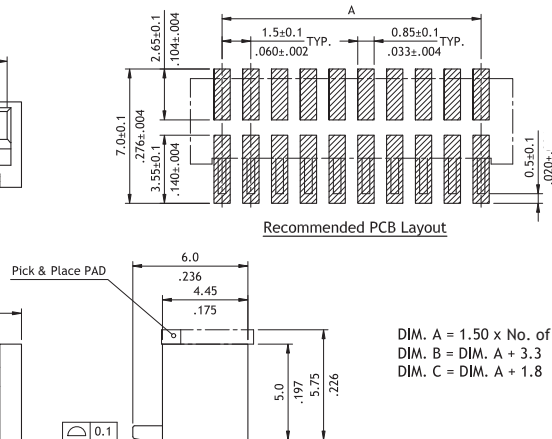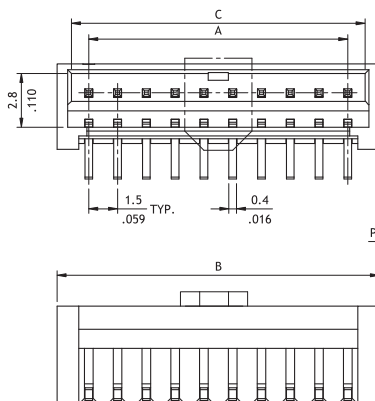


DIM. A = 1.50 x No. of Spaces
DIM. B = DIM. A + 3.3
DIM. C = DIM. A + 1.8



Side Entry

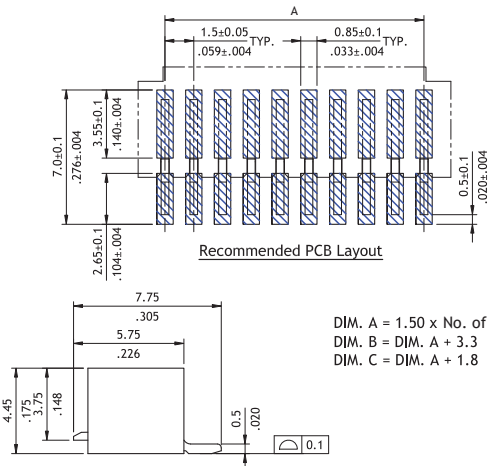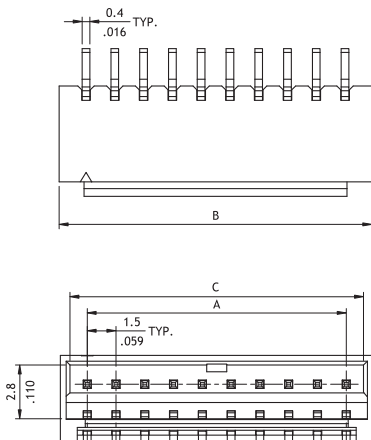

DIM. A = 1.50 x No. of Spaces
DIM. B = DIM. A + 3.3
DIM. C = DIM. A + 1.8



Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦
CI19 20 M 1 H R0 - NH

- ① Series No.
② No. of Circuits: 02 to 20
③ M = SMT Type
④ Plating Code:
1 = Matte Tin over Nickel
2 = Gold flash over Nickel

- ⑤ Type: V = Top Entry
H = Side Entry
⑥ Packing Options:
R0 = Tape & Reel
⑦ Process: -NH = For Lead Free IR Process and Halogen-Free