


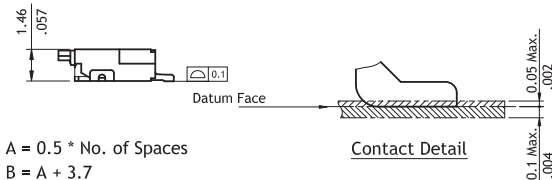


CF50 Series 0.50mm(.020")H=1.46 SMT ZIF One-Touch FFC/FPC Connectors



- ⊙ 1.46mm above the board
- ⊙ FFC/FPC zero insertion force and high retention force
- ⊙ Insulation: High temperature plastic UL 94V-0, Color Nature
- ⊙ Cover: High temperature plastic UL 94V-0, Color Black
- ⊙ Actuator designed easy for FFC/FPC installation and reliable operation
- ⊙ With metal fixed tabs to secure connector in place

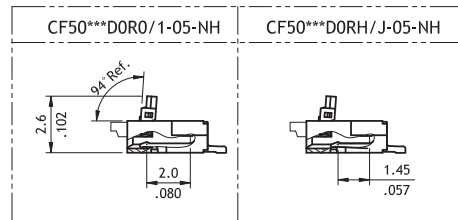

RoHS Compliant

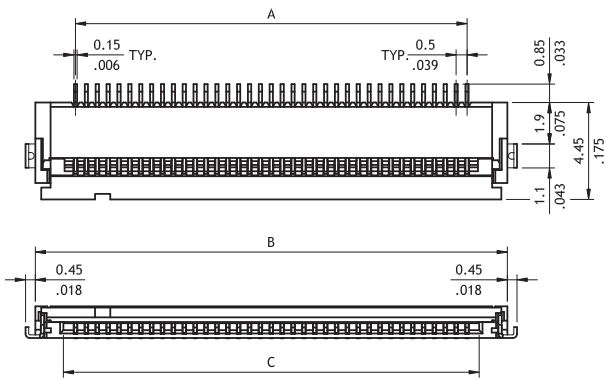

A = 0.5 * No. of Spaces
 B = A + 3.7
 C = A + 1.12

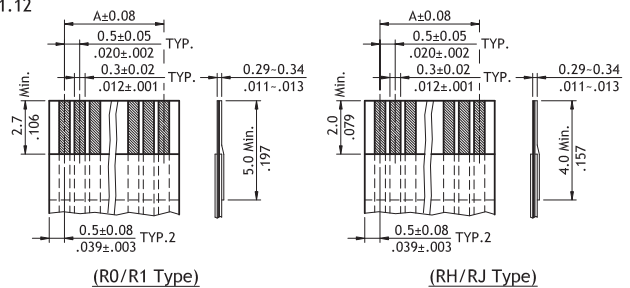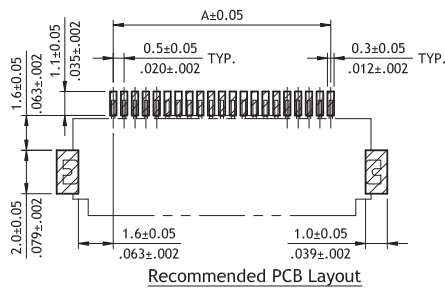

Accommodated FFC/FPC

Ordering Code

① CF50 ② 40 ③ 1 ④ D ⑤ 0 ⑥ R0 ⑦ - 05 ⑧ - NH

- ① Series No.
- ② No. of Circuits: 4 to 61
- ③ Plating Code:
1 = Matte Tin over Nickel
F = Gold flash over Nickel
- ④ Contact Style:
D = Downside Contact
- ⑤ Color: 0 = Nature
- ⑥ Packing:
R0 = Tape & Reel without Mylar
R1 = Tape & Reel with Mylar
- ⑦ Pitch: 05 = 0.50 mm
- ⑧ -NH = For Lead Free IR process and Halogen-Free

① CF50 ② 40 ③ 1 ④ D ⑤ 0 ⑥ RH ⑦ - 05 ⑧ - NH

- ① Series No.
- ② No. of Circuits: 4 to 61
- ③ Plating Code:
1 = Matte Tin over Nickel
F = Gold flash over Nickel
- ④ Contact Style:
D = Downside Contact
- ⑤ Color: 0 = Nature
- ⑥ Packing:
RH = Tape & Reel without Mylar
RJ = Tape & Reel with Mylar
- ⑦ Pitch: 05 = 0.50 mm
- ⑧ Process: -NH = For Lead Free IR process and Halogen-Free