



CI83 Series 2.54mm(.100") Friction Lock Breakaway Headers


- ⊙ Options with straight and right angle tails
- ⊙ Available with flat back wall for polarization
- ⊙ Mate with most of 2.54mm pitch connector in the market
- ⊙ Insulator: Glass filled polyester UL 94V-0, Color White
- ⊙ With Tin plated 0.64mm square pin

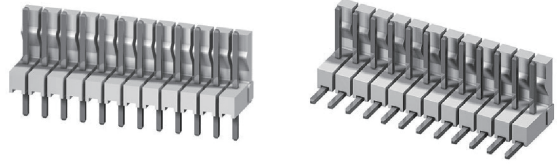


RoHS Compliant

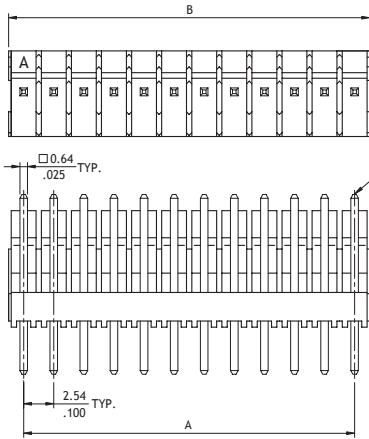


A = 2.54 x No. of Spaces
B = A + 2.54




P/N: CI83**P*V00




P/N: CI83**P*V0L




Recommended PCB Layout

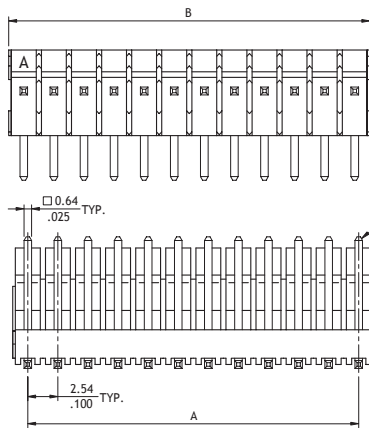


A = 2.54 x No. of Spaces
B = A + 2.54



P/N: CI83**P*H00



P/N: CI83**P*H0L



Recommended PCB Layout

Ordering Code

① C I 8 3 ② 3 6 ③ P ④ 1 ⑤ V ⑥ 0 0

- ① Series No.
- ② No. of Circuits: 02 to 36
- ③ P = DIP Header
- ④ Plating Code:
1 = Tin over Nickel

- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options:
00 = With Locking Ramp (Standard)
0L = Without Locking Ramp
*Special options consult manufacturer