



CH71 Series 2.00mm(.079") Dual Row Pin Headers

- With standoff prevent flux wicking
- Mate with CB74, CB76 and CB78 series

RoHS Compliant 


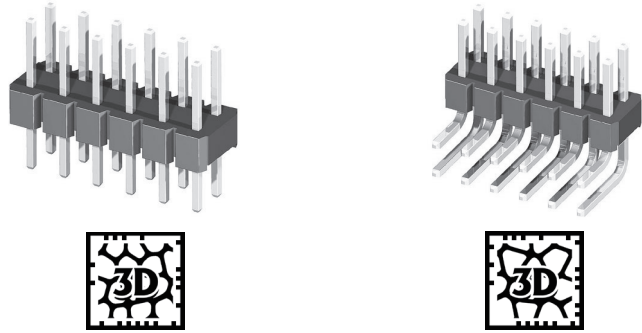


P/N CH71\*\*2VA00-NH

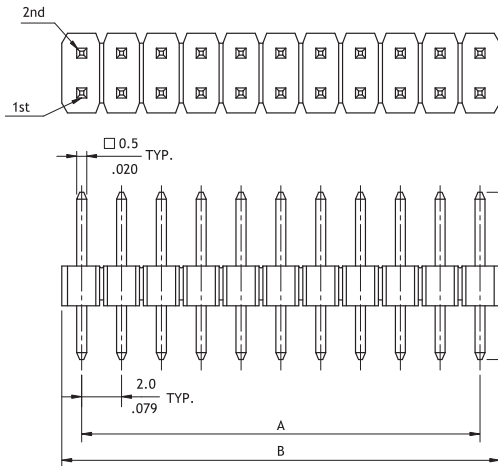


A = 2.0 x No. of Spaces  
B = A + 2.0  
Pin overall length 30.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.9(.154)	2.8(.110)
01	6.8(.268)	3.0(.118)





Recommended PCB Layout

P/N CH71\*\*2HA00-NH

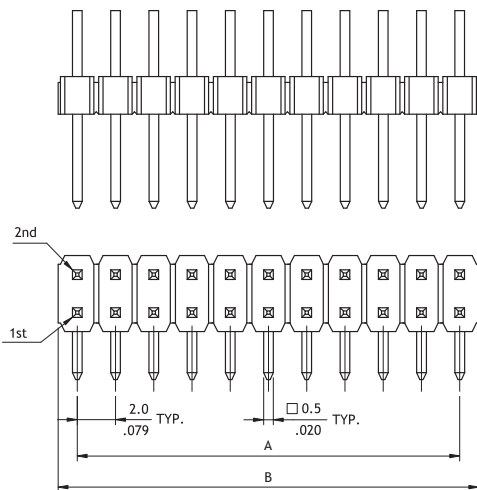

A = 2.0 x No. of Spaces  
B = A + 2.0

Option Code	Pin Dimension		
	C	D	E
00	3.9(.154)	2.8(.110)	1.1(.043)
02	2.9(.114)	2.8(.110)	1.1(.043)



Recommended PCB Layout

Ordering Code

① CH ② 71 ③ 80 ④ 2 ⑤ V ⑥ A ⑦ 00 - NH

- ① Series No.
- ② No. of Circuits: 02 to 80
- ③ Plating Code:  
2 = Gold flash over Nickel
- ④ Tail: V = Straight DIP Type  
H = Right Angle DIP Type
- ⑤ Insulator Material & Color:  
A = Nylon 6T, Color Black
- ⑥ Other Options: 00 = Standard  
\*See option code table  
\*Consult manufacturer for customized pin length
- ⑦ Process: -NH = For Lead Free soldering process and Halogen-Free