



CF27 Series 1.00mm(.039") H=1.20 SMT LIF FFC/FPC Connectors




- ⊙ 1.2mm above the board
- ⊙ Copper alloy dual contacts
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ With metal fixed tabs to secure connector in place




RoHS Compliant

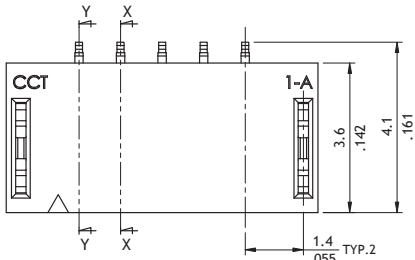


A = 1.0 x No. of Spaces
 B = A + 3.5
 C = A + 2.0
 D = A + 5.5

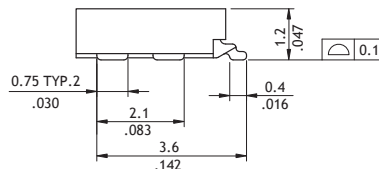


SEC.: Y-Y




SEC.: X-X

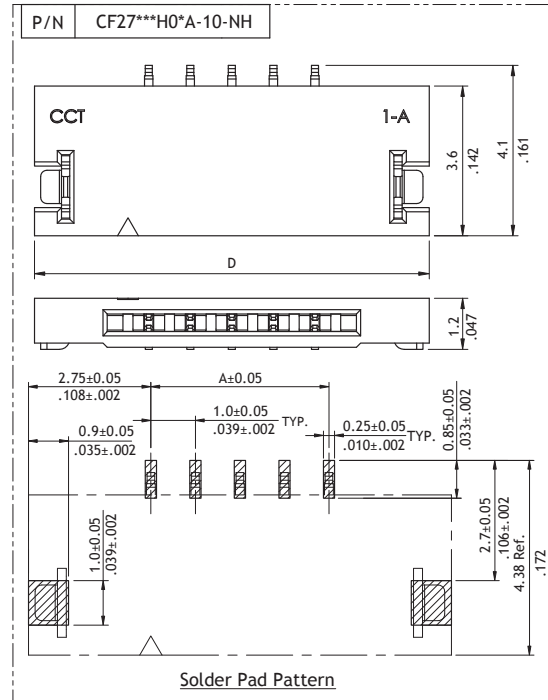


Solder Pad Pattern

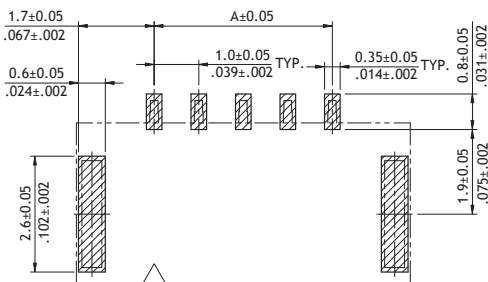

Solder Pad Pattern



Accommodated FFC

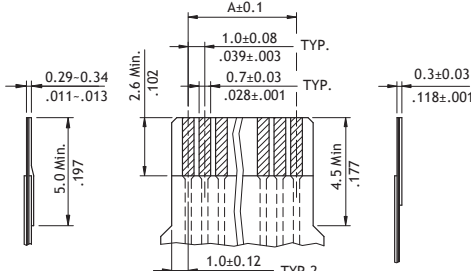

Accommodated FPC

Ordering Code

①	②	③	④	⑤	⑥	⑦	⑧	⑨
CF	27	10	1	H	0	R	0	- 10 - NH

- ① Series No.
- ② No. of Circuits: 04 to 10
- ③ Plating Code:
1 = Matte Tin over Nickel
2 = Gold flash over Nickel
- ④ Contact Style:
H = Side Entry
- ⑤ Color: 0 = Nature
- ⑥ Packing:
R = Tape & Reel
T = Tube
- ⑦ Other Options:
0 = Standard
A = Base of Wide size
- ⑧ Pitch: 10 = 1.00 mm
- ⑨ Process: -NH = For Lead Free IR process and Halogen-Free