



CI40 Series 1.25mm(.049") Wire to Board Housing & Terminal & SMT Header

- ⊙ Locking slots provide secure mating
- ⊙ Fixed tab PCB hold-down and strain-relief for SMT tail
- ⊙ Insulator: High temperture plastic UL 94V-0, Color Nature

**NEW**


P/N CI40**M1HR0-NH

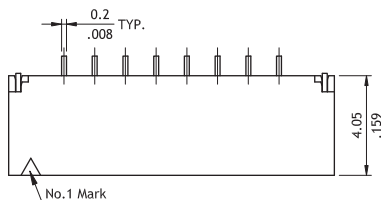




$$A = 1.25 \times \text{NO. OF SPACES}$$

$$B = A + 4.50$$


$$C = A + 2.60$$

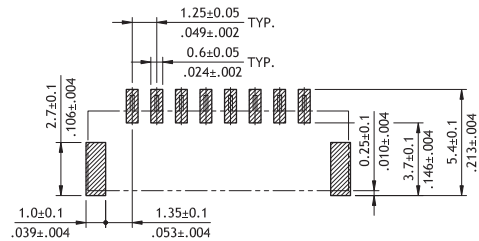

Recommended PCB Layout

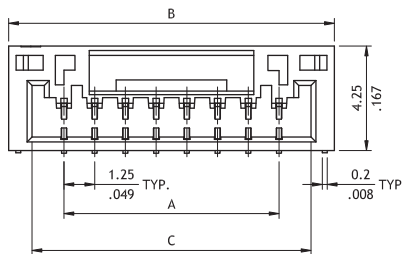


P/N CI40**M1VR0-NH

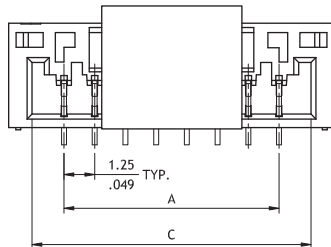




$$A = 1.25 \times \text{NO. OF SPACES}$$

$$B = A + 4.50$$

$$C = A + 2.60$$

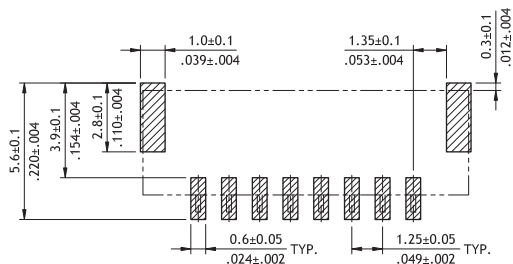

Recommended PCB Layout

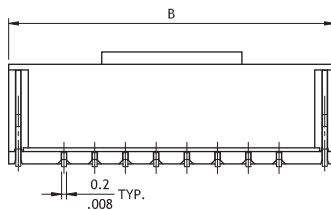

SEC. A-A

Ordering Code

① CI40 ② 15 ③ M ④ 1 ⑤ V ⑥ R0 - ⑦ NH

- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ Contact Type : M = SMT
- ④ Plating Code:
1 = Matte Tin plated over Nickel

- ⑤ Tail Style: H=Side entry
V=Vertical
- ⑥ Option : R0=Tape & Reel Packing
- ⑦ Process: -NH = For Lead Free IR Process and Halogen-Free