



Notes:

1. DIM. E = 4.0 min.
2. Pin overall length 30.0 max.
3. Material:
  - \* Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
  - \* Square Pin: Brass
  - \* Pick & Place Pad: Nylon 6T UL 94V-0

Ordering Code:

CH75 \*\* \* M 1 \*\* - 0 \*  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

Recommended P.C. Board Layout

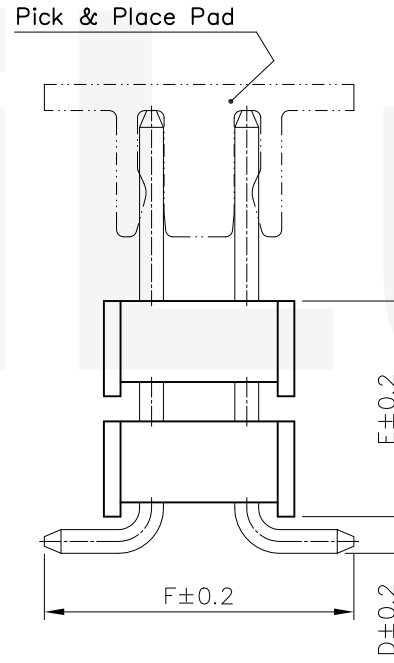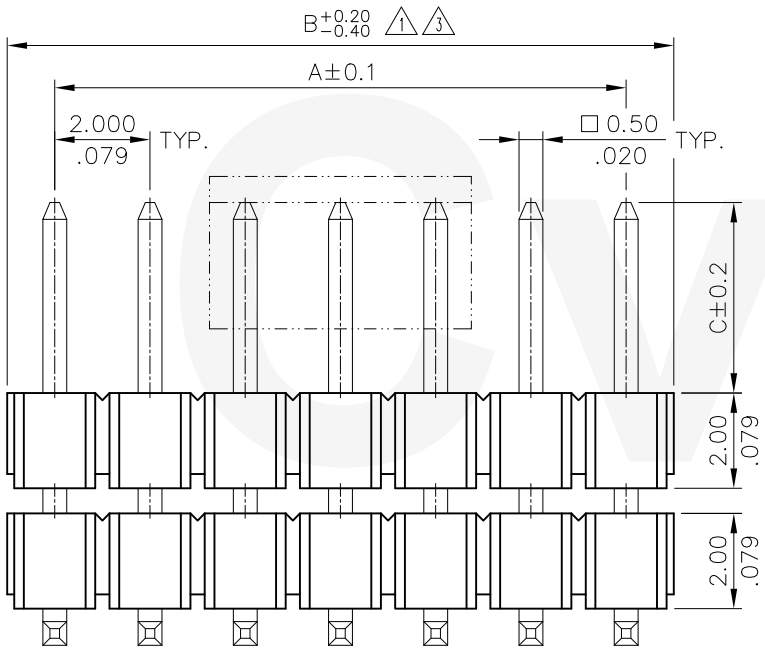


- ① Series No.
- ② No. of Contact: 04 to 80
- ③ Plating code:
  - 1=3.05 μm(120 μ") Min. Tin over 0.79 μm(30 μ") Nickel
  - 2=Gold Flash plated over 1.27 μm(50 μ") Nickel
  - 3=0.38 μm(15 μ") Gold plated over 1.27 μm(50 μ") Nickel
  - 4=0.76 μm(30 μ") Gold plated over 1.27 μm(50 μ") Nickel
- ④ Tail & Mounting Style: M=Straight SMT Type
- ⑤ Insulator Material & Color: 1=Nylon 6T , Color Black
- ⑥ Option Code: See Table PDF. File No. CH7502T
- ⑦ Pin Size: 0=Original design
- ⑧ 0=Without Pick & Place Pad (Tube packaged)  
 P=With Pick & Place Pad (Tape & Reel packing)

DIM. A = 2.00 X No. of Spaces  
 DIM. B = DIM. A + 2.00

△\* Available in 4 through 60 Ciccuits

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 2.00mm(.079") DUAL ROW DUAL BODY SURFACE BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation
③	Aaron	10/21-16'	ECNT116250/ECRB116072	CIVILUX CORP	DRAWN BY: Aaron	12/20-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sun	10/15/08'	ECR08120-1/ECN08480	2017.01.05	ENGINEER: Sun	12/20-16'	.X ± 0.25/.010 X' ± 1'	FINISH:	DRAWING NO. CH7502SE PART NO. CH75***M1**-0*
①	Sandy	08/27/04'	ECN04327	ISSUED	CHECKED BY: Eisley	12/21-16'	.XX ± 0.15/.006 .X' ±	SCALE 6 / 1	SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	12/21-16'	.XXX ± 0.10/.004 .XX' ±		