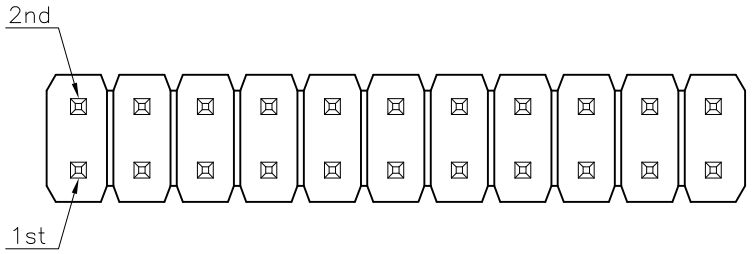

Notes:
* Material:
Contact: Brass
△4 * Pin overall Length 30.0mm Max.

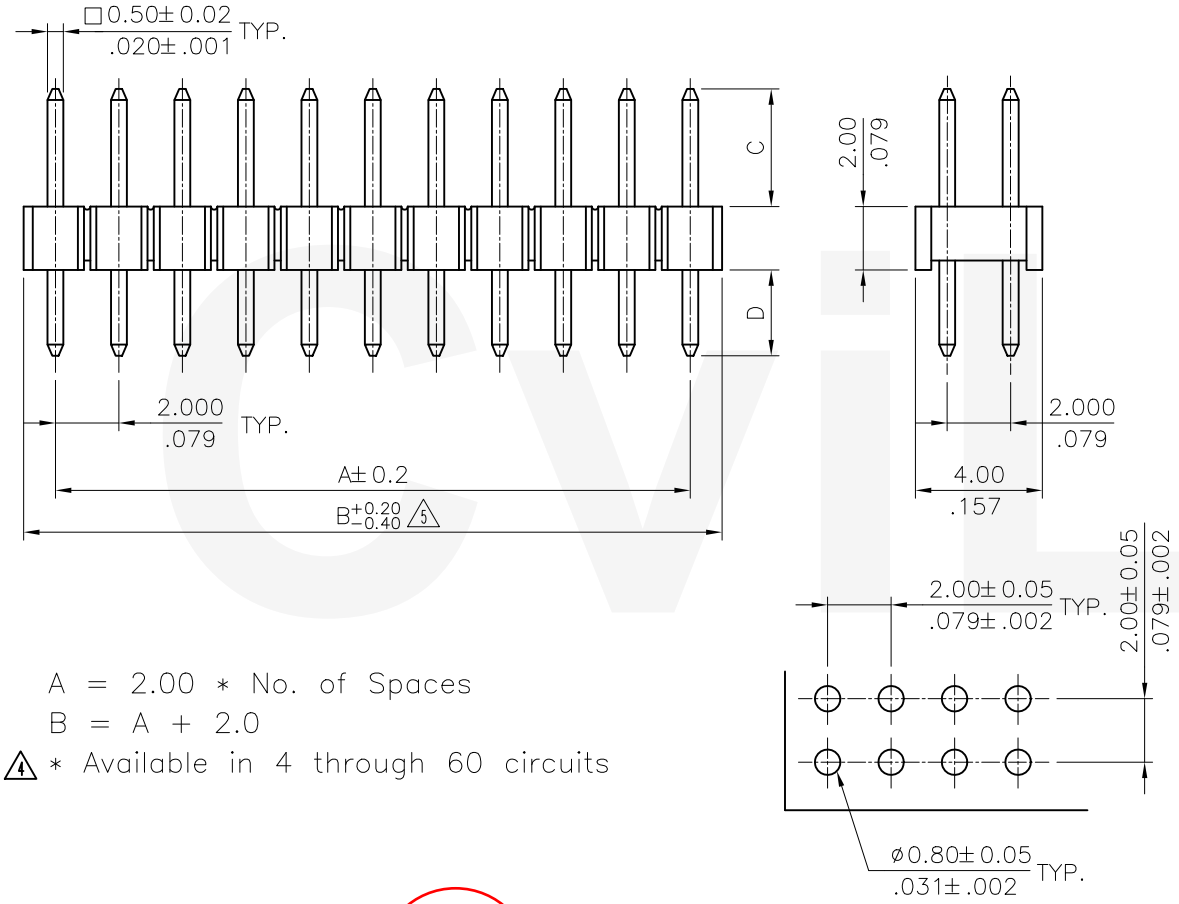

A = 2.00 * No. of Spaces
B = A + 2.0
△4 * Available in 4 through 60 circuits

Recommended P.C. Board Layout

Ordering Code

CH71 ** * V * **
① ② ③ ④ ⑤ ⑥

① Series No.
② No. of Circuits
③ Plating Code:
1= 3.05μm(120μ") Min. Tin Plating on Contact area and Soldertails, 1.27μm(50μ") Nickel Underplating over all
2= 0.03μm(1.2μ") Min. Gold Flash Plating on Contact area and Soldertails, 1.27μm(50μ") Nickel Underplating over all
3= 0.38μm(15μ") Min. Gold Plating on Contact area and Soldertails 1.27μm(50μ") Nickel Underplating over all
4= 0.76μm(30μ") Min. Gold Plating on Contact area and Soldertails 1.27μm(50μ") Nickel Underplating over all
④ V= Straight
△2 ⑤ Insulation:
1= PBT UL 94V−0, Color Black
A= Nylon 6T UL 94V−0, Color Black
⑥ Pin Length Option code:
See Table PDF. File No. CH7101T

CVILUX CORP
2016.12.22
ISSUED

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△5	Aaron	10/21-16'	ECNT116250/ECRB116072
△4	Sun	10/15/08'	ECR08120-1/ECN08480
△3	Sun	1/19/06'	ECN06019
△2	Casey	5/28/04'	ECN04208

		DATE
DRAWN BY:	Aaron	12/15-16'
ENGINEER:	Sun	12/15-16'
CHECKED BY:	Eisley	12/16-16'
APPROVED BY:	Eisley	12/16-16'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.30/.012	X°±1°
.XX±0.20/.008	.X°±
.XXX±0.10/ .004	.XX°±

TITLE: 2.00MM(.079") STRAIGHT DUAL ROW BORAD MOUNT PIN HEADER
MATERIAL:
FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CH7101SI	PART NO.	CH71***V***
SCALE	4 / 1	SHEET 1 OF 1	