


Part No.	Wire Range	Insulation Diameter	Reel Q'ty
CP31T031BES	AWG #20~#24	2.48 (.098) MAX.	5,000 PCS.
CP31T041BES	AWG #16~#20	3.30 (.130) MAX.	3,500 PCS.


Ordering Code:

CP31 T0\* 1 B E S  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Accept wire gage:  
 T03= AWG #20 ~ #24  
 T04= AWG #16 ~ #20
- ③ Plating code:  
 1= 2.03μm(80μ") Tin over 0.76μm(30μ") Nickel
- ④ Material : B= Brass
- ⑤ Plating method: E= Pre-tinned
- ⑥ Style: S= Receptacle terminal

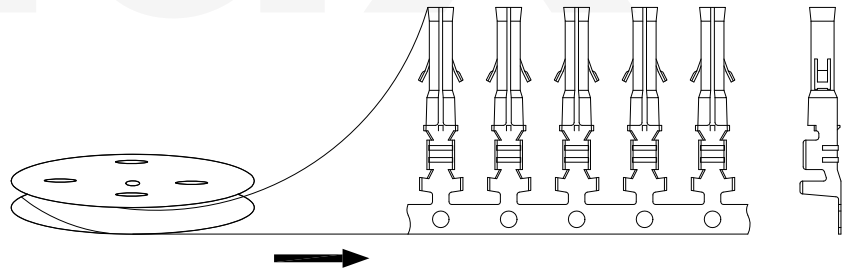

② PULL OUT DIRECTION(PLATED)

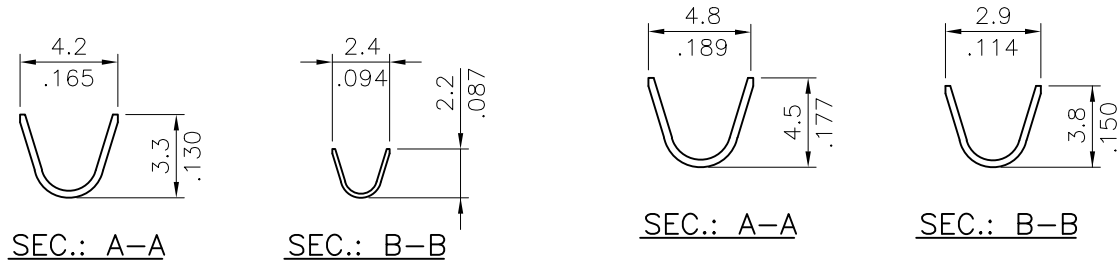

SEC.: A-A  
 SEC.: B-B  
 (P/N: CP31T031BES)

SEC.: A-A  
 SEC.: B-B  
 (P/N: CP31T041BES)

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: CRIMP CLIP TERMINAL	瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Karen	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Karen	6/13-15'	ECNT115140/ECRT115017	2015.07.02 ISSUED	ENGINEER: Sun	.X ± 0.20/.008 X' ± 1'	FINISH:	
①	Casey	6/17/04'	ECN04237		CHECKED BY: Eisley	.XX ± 0.10/.004 .X' ±	DRAWING NO. CP3104SF PART NO. CP31T0*1BES	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	.XXX ± 0.05/.002 .XX' ±	SCALE 3 / 1	SHEET 1 OF 1