


Notes:

* Insulator: Glass filled Polyester UL 94V-0
Color Black or White

* Contact: Brass

△ * Shell: Steel, Nickel plated as standard

* For Lead Free Wave Flow Process
Recommended P.C. Board Layout see drawing No. CD7249S*

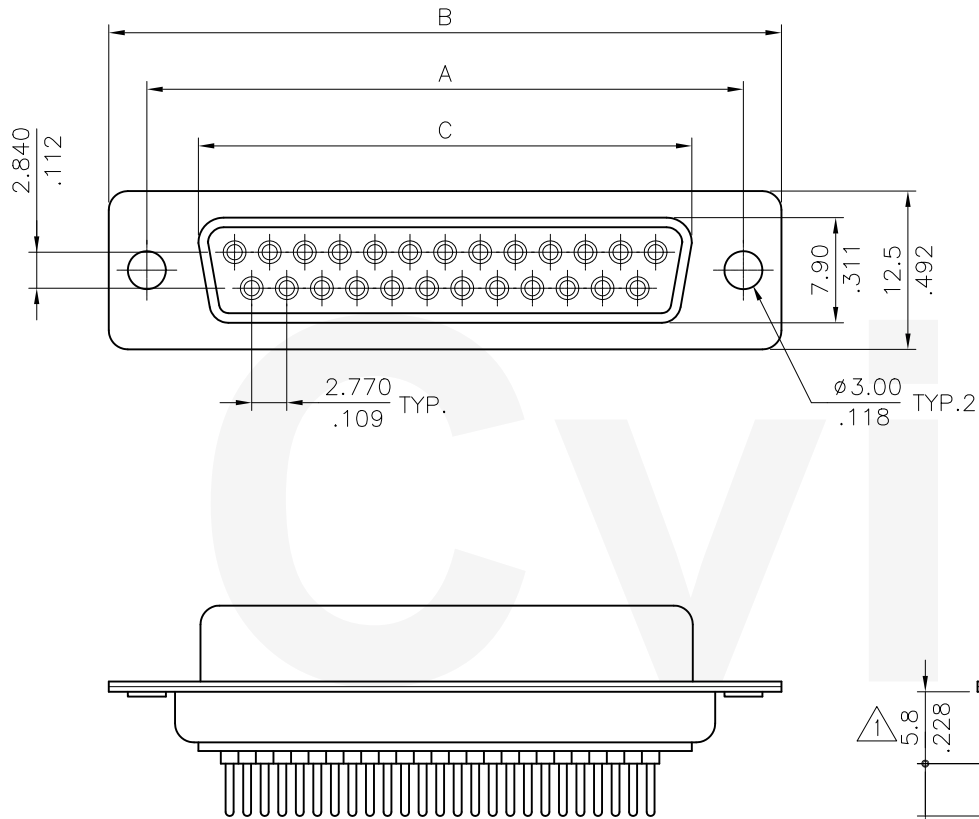

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.30(.642)
15	33.32(1.312)	39.2(1.543)	24.60(.969)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)

Ordering Code :

CD72 25 S * * 00

① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27μm(50μ") Nickel (Standard)
 - 3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
 - 5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With 3.00mm holes on shell

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: D-SUB TOP ENTRY FEMALE CONNECTOR (MACHINED CONTACTOR)	DRAWING NO.	PART NO.	SHEET	OF
△4											
△3											
△2	Karen	1/31-18'	ECNT117262/ECRT117074	EISLEY	2/05-18'	.X ±0.30/012	X: ± 1'	CD7202SE	CD72**S**00	1	1
△1	SUN	12/03/03'	ECN03437/ECR03056-0	EISLEY	2/05-18'	.XX ±0.20/008	.X ±	2 / 1		1	1
						.XXX ±0.10/004	.XX ±				



瀚荃股份有限公司
CviLux Corporation