


Material:

- * Insulator: Glass filled polyester UL 94V-0
- * Contacts: Copper alloy

△* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD6113S*

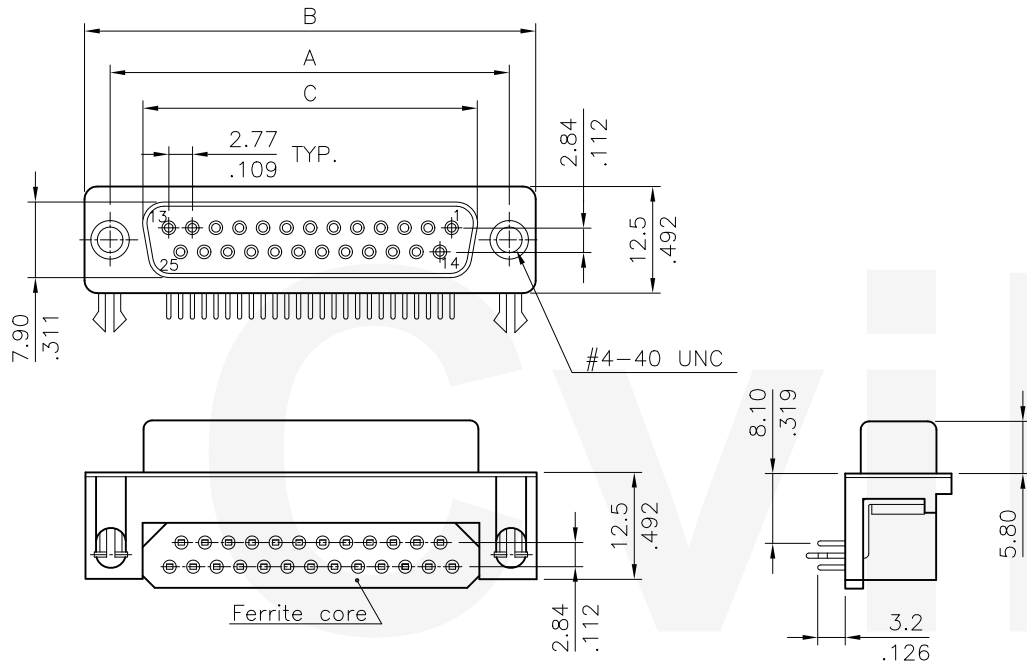

Ordering Code:

CD62 25 S 2 1 FO
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts
- ③ Contact type: S= Receptacle(Female)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black
- ⑥ Other Option:
FO= Riveted ground hooks with #4-40 UNC open (Standard)
GO= Riveted ground hooks pre-loaded #4-40 UNC Hex screws
IO= Riveted ground tabs thread #4-40 UNC open and ground tabs with ø3.2mm holes
JO= Assembly ground hooks by #4-40 UNC Hex screws

Lead Free Process
RoHS Compliant

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.30(.642)
15	33.32(1.312)	39.2(1.543)	24.60(.969)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)

CVALUX CORP
 2018.03.29
 ISSUED

Mounting Style							
Code	FO	Code	GO	Code	IO	Code	JO
			DIM. L= 4.8mm		ø A= 3.2mm		DIM. L= 4.8mm

④					DATE	UNIT: mm / inch	TITLE: D-SUB EITH FERRITE CORE PCB MOUNT (8.1mm) FEMALE CONNECTOR	瀚荃股份有限公司 CviLux Corporation	
③				DRAWN BY: Ken	3/16-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
②				ENGINEER: Sun	3/19-18'	.X ± 0.30/012 X' ± 1"	FINISH:		
①	Ken	3/12-18'	ECRT117079/ECNT118047	CHECKED BY: Eisley	3/23-18'	.XX ± 0.20/010 .X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/23-18'	.XXX ± 0.10/004 .XX' ±	DRAWING NO. CD6201SE	PART NO. CD62**S*1**	
							SCALE	2 / 1	SHEET 1 OF 1