

Ordering Code:

CU07 24 S \* H D F  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Contacts: 24= 24+Key
- ③ Contact type: S= Socket
- ④ Plating code:  
 A= Selective Gold flash plated over 1.27μm(50μ") Nickel  
 B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel  
 C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Tail style: H= Right angle
- ⑥ Product type: D= Digital Type
- ⑦ Option: F= #4-40 UNC Threaded insert

Lead Free Process

RoHS Compliant

④	Enya	11/15-13'	ECNT113120/ECRT113037		DATE	UNIT: mm / inch	TITLE: DVI R/A RECEPT. CONN. (INTEGRATED TYPE 24+4+1)	
③	Sandy	11/27/06	ECN06421		DRAWN BY: Enya	11/15-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:
②	Sun	9/30/05'	ECR05067-0/ECN05275		ENGINEER: Sun	11/18-13'	.X ± 0.30/.012 X' ± 1'	
①	JASON	04/27-04	ECN04171, ECR04038-0		CHECKED BY: Eisley	11/18-13'	.XX ± 0.20/.008 .X' ±	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	11/18-13'	.XXX ± 0.13/.005 .XX' ±	FINISH:




瀚荃股份有限公司  
 CviLux Corporation

DRAWING NO.	CU0712SE	PART NO.	CU0724S*HDF
SCALE	2 / 1	SHEET	1 OF 2

NOTES: \* Materials:

- Housing: PBT, UL 94V-0, Color: Ivory.
- Bracket: PA66, UL 94V-0, Color: Ivory.
- Terminal: Copper Alloy.  
Gold Plated over Nickel at Contact Area.  
Tin Plated over Nickel at Solder Area.
- Shell: Zinc Alloy with Nickel Plated.
- Boardlock: Steel with Tin Plated.
- Rivet: Copper Alloy with Nickel Plated.

\* For Lead Free wave flow process.

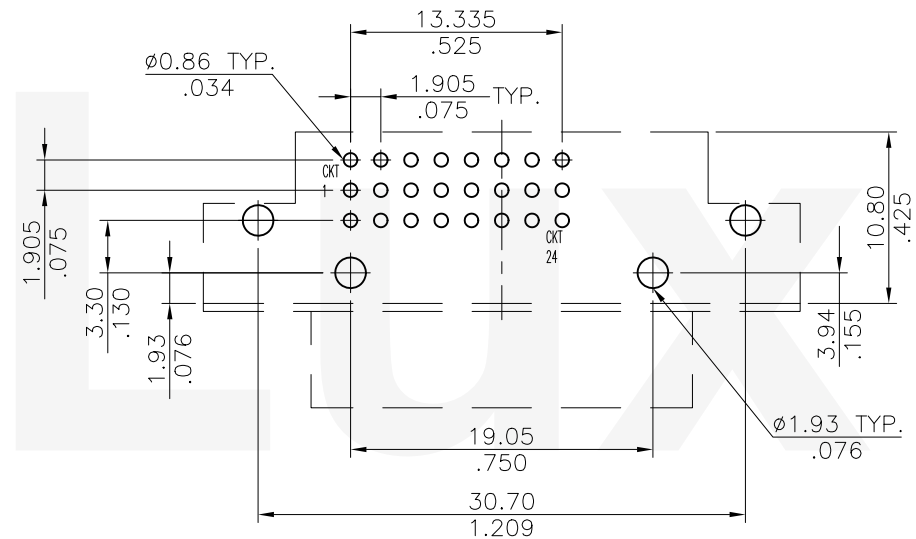

Recommended P.C Board Layout

Tolerance: ±0.05mm

Lead Free Process

RoHS Compliant

4	Enya	11/15-13'	ECNT113120/ECRT113037			DATE	UNIT: mm / inch	TITLE: DVI R/A RECEPT. CONN. (INTEGRATED TYPE 24+4+1)	 瀚荃股份有限公司 CviLux Corporation	
3	Sandy	11/27/06	ECN06421		DRAWN BY: Enya	11/15-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2	Sun	9/30/05'	ECR05067-0/ECN05275		ENGINEER: Sun	11/18-13'	.X ± 0.30/.012 X' ± 1"	FINISH:		
1	JASON	04/27-04	ECN04171, ECR04038-0		CHECKED BY: Eislely	11/18-13'	.XX ± 0.20/.008 .X' ±	DRAWING NO. CU0712SE		PART NO. CU0724S*HDF
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eislely	11/18-13'	.XXX ± 0.13/.005 .XX' ±	SCALE 2 / 1		SHEET 2 OF 2