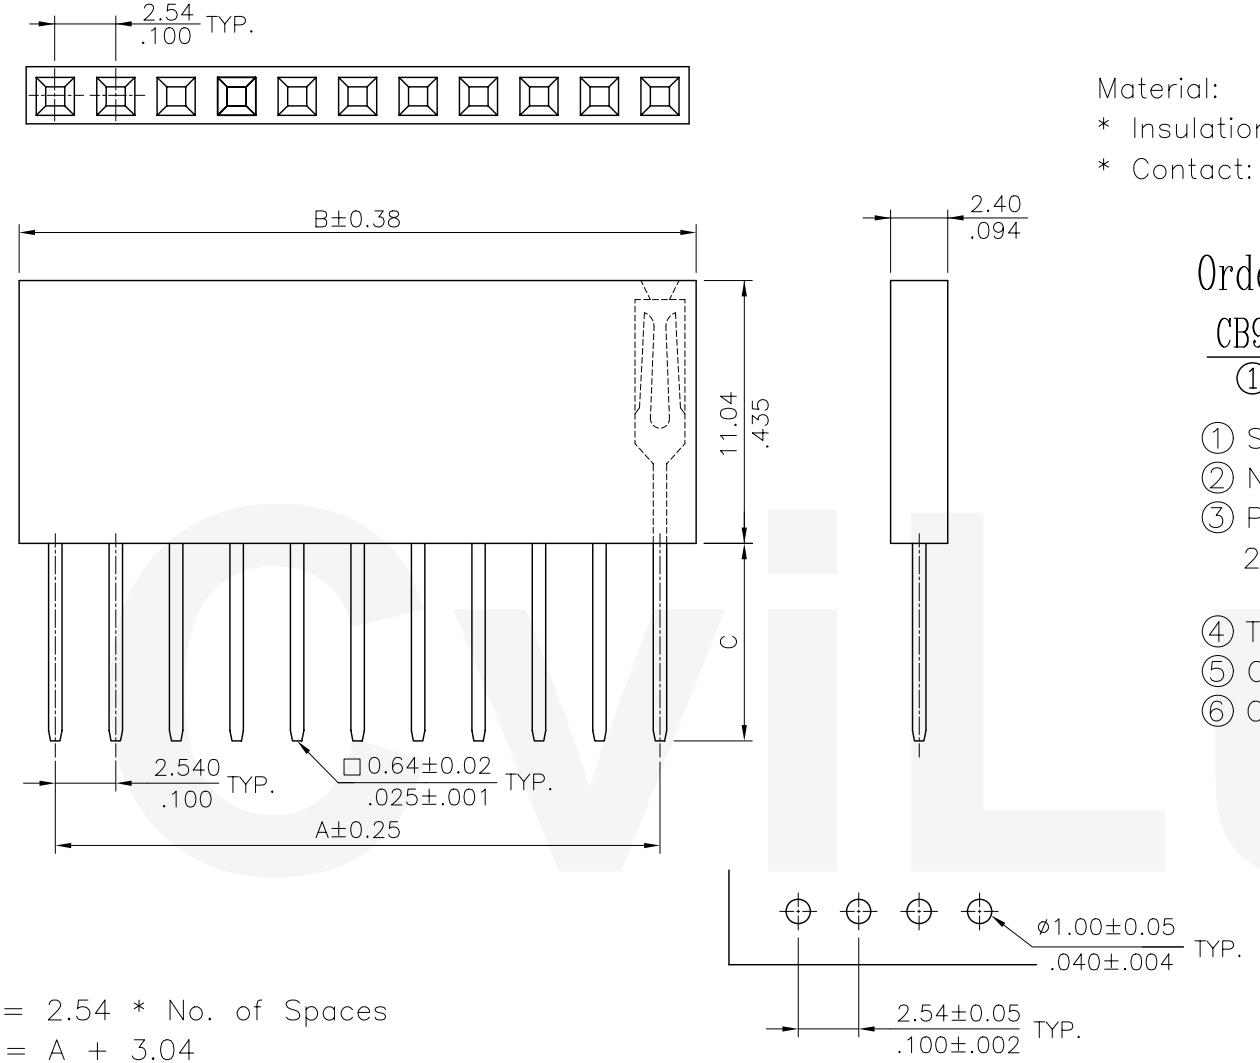

Material:

* Insulation:Glass filled polyester UL 94V-0
* Contact: Phosphor Bronze

Ordering Code:

CB93 ① ** ② 2 ③ V ④ 1 ⑤ 00 ⑥

① Series No.
② NO. of Circuits:
③ Plating code:
2= Gold flash plated over 1.27μm(50μ") Nickel
④ Tail Style: V= Straight
⑤ Color: 1= Black
⑥ Other options: 00= Standard

Option Code	Dimension
	C
00	12.20(.480)
A0	2.30(.091)

A = 2.54 * No. of Spaces
B = A + 3.04
* Available in 20,32 circuits

Recommended P.C. Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1			

CVILUX CORP. 2007.01.03 ISSUED

		DATE
DRAWN BY:	Sandy	12/27-06'
ENGINEER:	Eisley	12/29-06'
CHECKED BY:	David	12/29-06'
APPROVED BY:	Alex	12/29-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30 / .012	X.° ± 1°
.XX ± 0.20 / .008	.X° ±
.XXX ± 0.10 / .004	.XX° ±

TITLE: 2.54MM(.100") SINGLE ROW ELEVATED CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CB9301SA	PART NO.	CB93**2V1**
SCALE	3 / 1	SHEET 1 OF 1	