


Material:

* Insulation: PBT+30% Glass filled UL 94V-0

* Contact: Phosphor Bronze

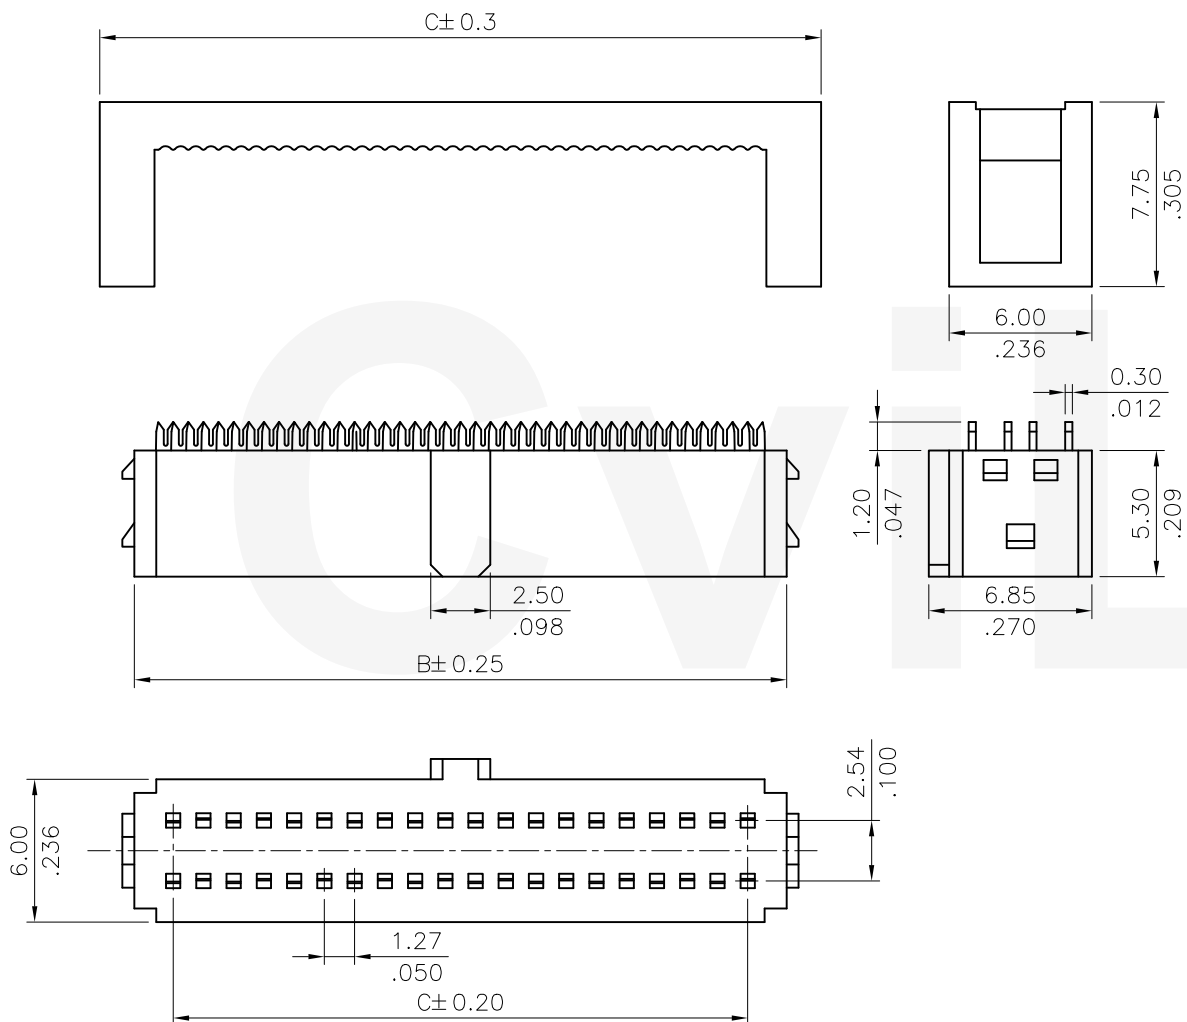

Ordering Code:

CA01 ** S A 1 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: S= Socket
- ④ Plating option :
 A= Selective Gold flash plated over 1.27μm(50μ") Nickel
 B= Selective 0.38μm(15μ") Gold Plated over 1.27μm(50μ") Nickel
 C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black
- ⑥ Option: 00= Standard

Circuits	Dimension		
	A	B	C
10	5.08(.200)	8.35(.329)	11.25(.443)
12	6.35(.250)	9.62(.379)	12.52(.493)
14	7.62(.300)	10.89(.429)	13.79(.543)
16	8.89(.350)	12.16(.479)	15.06(.593)
20	11.43(.450)	14.70(.579)	17.60(.693)
24	13.97(.550)	17.24(.679)	20.14(.793)
26	15.24(.600)	18.51(.729)	21.41(.843)
30	17.78(.700)	21.05(.829)	23.95(.943)
34	20.32(.800)	23.59(.929)	26.49(1.043)
40	24.13(.950)	27.40(1.079)	30.30(1.193)
50	30.48(1.200)	33.75(1.329)	36.65(1.443)
60	36.83(1.450)	40.10(1.579)	43.00(1.693)
80	49.53(1.950)	52.80(2.079)	55.70(2.193)
100	62.23(2.450)	65.50(2.579)	68.40(2.693)

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1.27MM(.050") RIBBON CABLE IDC CONNECTOR	瀚荃股份有限公司 CviLux Corporation			
③					DRAWN BY: Ken	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				DRAWING NO.
②					ENGINEER: Sun	.X ± 0.30 / .012 X' ± 2'	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
①					CHECKED BY: Eisley	.XX ± 0.20 / .008 .X' ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	.XXX ± .XX' ±					

CVILUX CORP
 2017.03.10
 ISSUED