
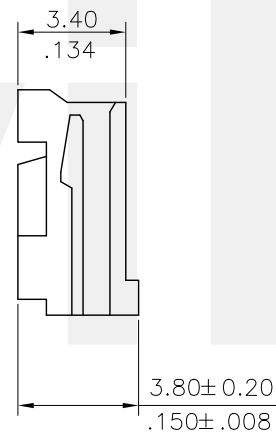
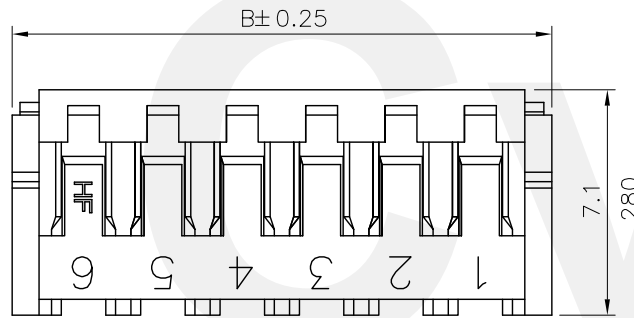


* Material: Nylon 66 UL 94V-0
Color Nature

Ordering Code:


CI21 ** S 0000
① ② ③ ④

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: S= Connector housing
- △④ Other options: 0000=Standard

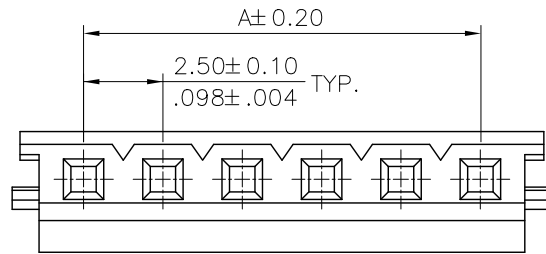

| Circuits | Dimension | | |
|----------|--------------|-------------|--------------|
| | A | B | C |
| 2 | 2.50(.098) | 7.0(.276) | 5.40(.213) |
| 3 | 5.00(.197) | 9.5(.374) | 7.90(.311) |
| 4 | 7.50(.295) | 12.0(.472) | 10.40(.409) |
| 5 | 10.00(.394) | 14.5(.571) | 12.90(.508) |
| 6 | 12.50(.492) | 17.0(.669) | 15.40(.606) |
| 7 | 15.00(.591) | 19.5(.768) | 17.90(.705) |
| 8 | 17.50(.689) | 22.0(.866) | 20.40(.803) |
| 9 | 20.00(.787) | 24.5(.965) | 22.90(.902) |
| 10 | 22.50(.886) | 27.0(1.063) | 25.40(1.000) |
| 11 | 25.00(.984) | 29.5(1.161) | 27.90(1.098) |
| 12 | 27.50(1.083) | 32.0(1.260) | 30.40(1.197) |
| 13 | 30.00(1.181) | 34.5(1.358) | 32.90(1.295) |
| 14 | 32.50(1.280) | 37.0(1.457) | 35.40(1.394) |
| 15 | 35.00(1.378) | 39.5(1.555) | 37.90(1.492) |

RoHS Compliant

| | | | | | | | | |
|-----|-------|----------|------------|--|--------------------|---|--|--|
| △4 | | | | | DATE | UNIT: mm / inch | TITLE: 2.50MM(.098") CRIMP TERMINAL HOUSING |  瀚荃股份有限公司 CviLux Corporation |
| △3 | | | | | DRAWN BY: Karen | TOLERANCE UNLESS OTHERWISE SPECIFIED | MATERIAL: | |
| △2 | | | | | ENGINEER: Eisley | .X ± 0.25/.010 X* ± 1* | FINISH: | |
| △1 | Karen | 5/11-12' | ECR12033-0 | | CHECKED BY: Eisley | .XX ± 0.15/.006 .X* ± | | DRAWING NO. CI2130SB |
| SYM | NAME | DATE | REVISIONS | | APPROVED BY: David | .XXX ± 0.08/.004 .XX* ± | SCALE 4 / 1 | SHEET 1 OF 1 |

CVILUX CORP
2012.05.28
ISSUED