

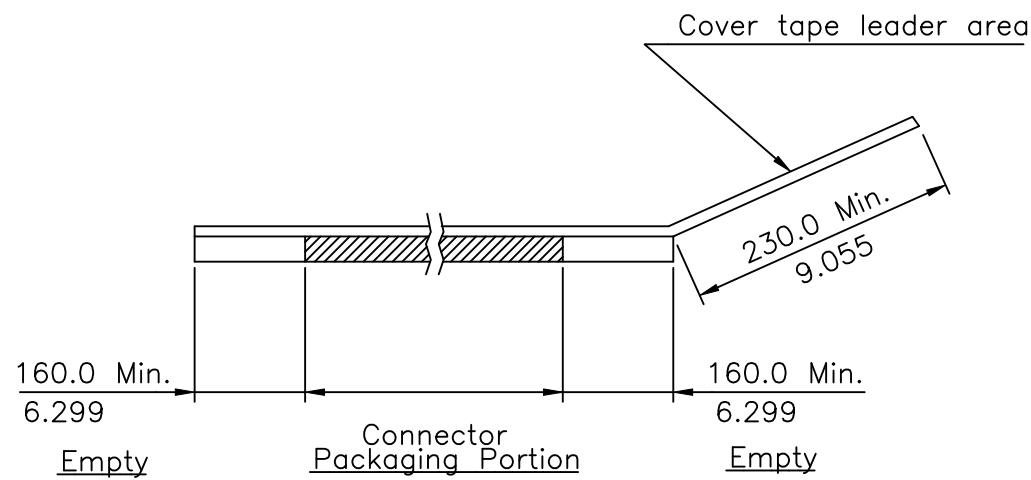


NOTE :

- △ * Reel Material : HIPS
- * Carrier Material : Transparent Anti-static Polysyrene.
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- △ * All dimensions meet EIA-481-* requirements.
- * Quantity : 600 PCS/Reel

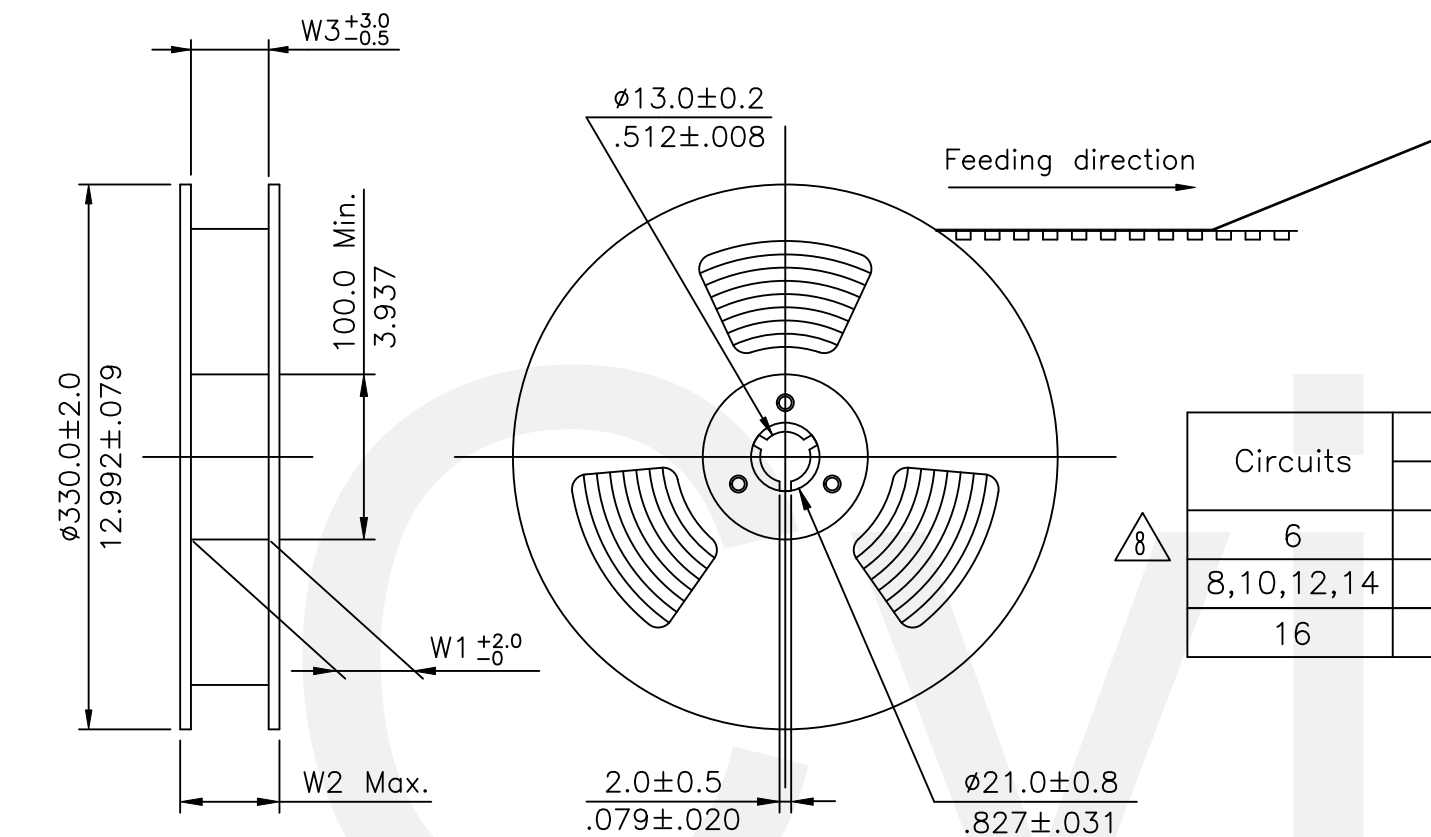

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
6	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
8,10,12,14	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	5
16	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)	4

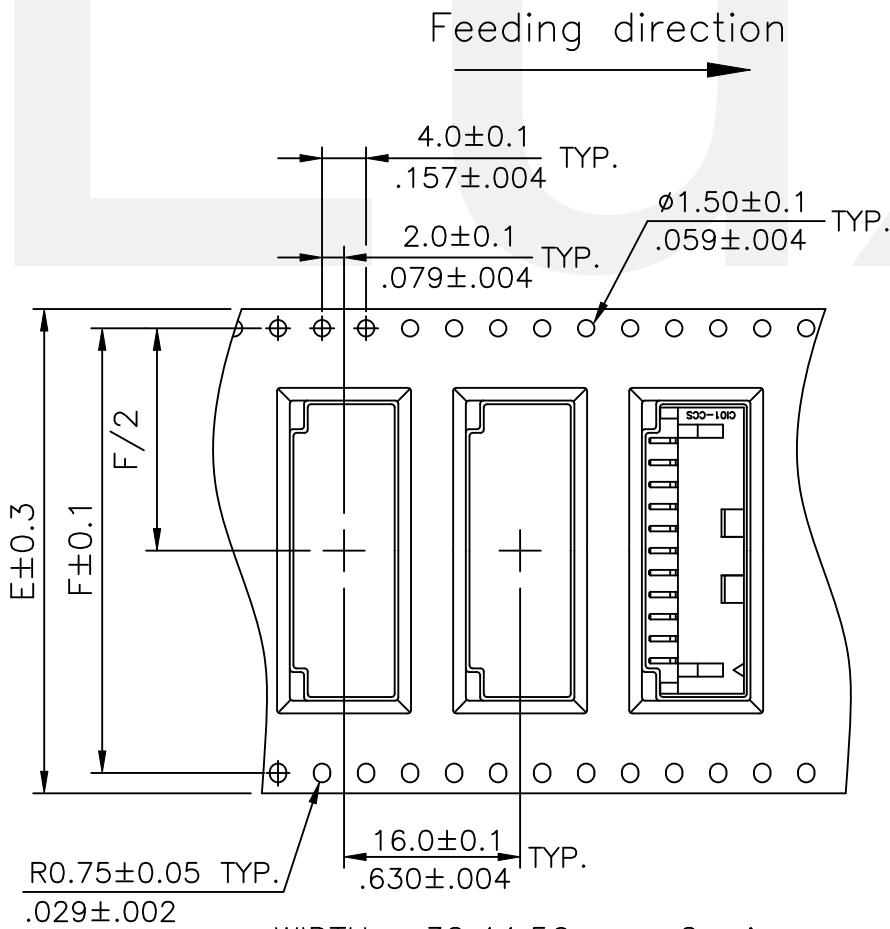

RoHS Compliant

△9	Sun	10/15-25'	ECNT125291		DATE	UNIT: mm / inch	TITLE: 2.00mm PITCH SIDE ENTRY	 瀚荃股份有限公司 CviLux Corporation			
△8	Eric H	6/03-25'	ECNT125141	DRAWN BY:	Sun	10/15-25'	SMT HEADER				
△7	Jessie	11/2-23'	ECNT123179/ECRB123029	ENGINEER:	Sun	10/15-25'	MATERIAL:	DRAWING NO.	CI0118AJ	PART NO.	CI01**M1H*L-NH
△6	Sun	1/06-21'	ECRT120085/ECNT120316	CHECKED BY:	Eisley	10/15-25'	FINISH:	SCALE		SHEET	2 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	10/15-25'					