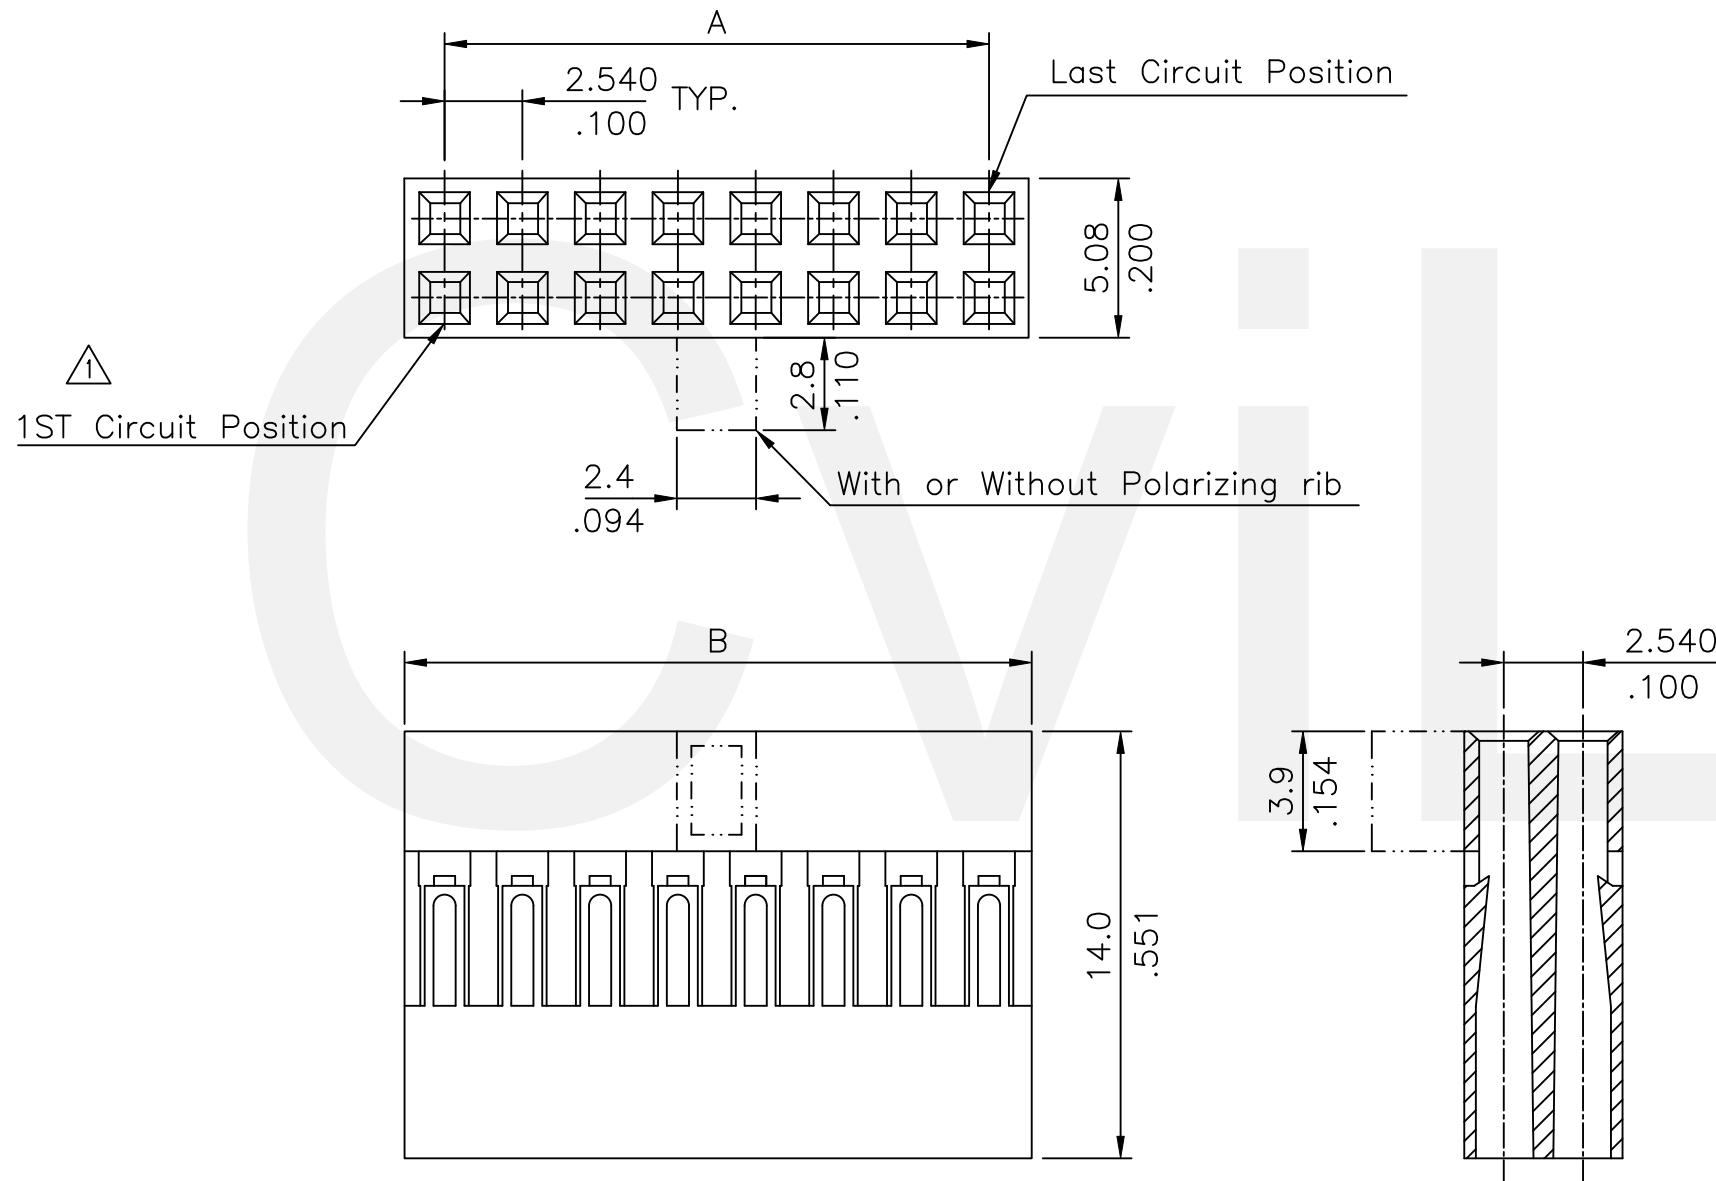




- \* Material: Noryl UL 94V-1  
Color Black
- \* Without polarizing rib ---- P/N: CI34\*\*S0010
- \* With Polarizing rib ----- P/N: CI34\*\*S001A



Circuits	Dimension	
	A	B
4	2.54(.100)	5.1(.201)
6	5.08(.200)	7.6(.299)
8	7.62(.300)	10.2(.402)
10	10.16(.400)	12.7(.500)
12	12.70(.500)	15.2(.598)
14	15.24(.600)	17.8(.701)
16	17.78(.700)	20.3(.799)
18	20.32(.800)	22.9(.902)
20	22.86(.900)	25.4(1.000)
22	25.40(1.000)	27.9(1.098)
24	27.94(1.100)	30.5(1.201)

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100")	 瀚荃股份有限公司 CviLux Corporation				
3					DATE	TOLERANCE UNLESS OTHERWISE SPECIFIED	DUAL ROW CRIMP TERMINAL HOUSING					
2	Sun	3/11-24'	ECRT123086/ECNT124004	 2024/03/11 ISSUED	DRAWN BY: Sun	3/11-24'	MATERIAL:	DRAWING NO.	CI3401SE	PART NO.	CI34**S001*	
1	Sandy	11/10-10'	ECN10365		ENGINEER: Sun	3/11-24'		FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS		CHECKED BY: Eisley	3/11-24'						
					APPROVED BY: Eisley	3/11-24'						