Materials:

* Insulator: Glass filled polyester UL 94V-0
* Contacts: Copper alloy
* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0303S*

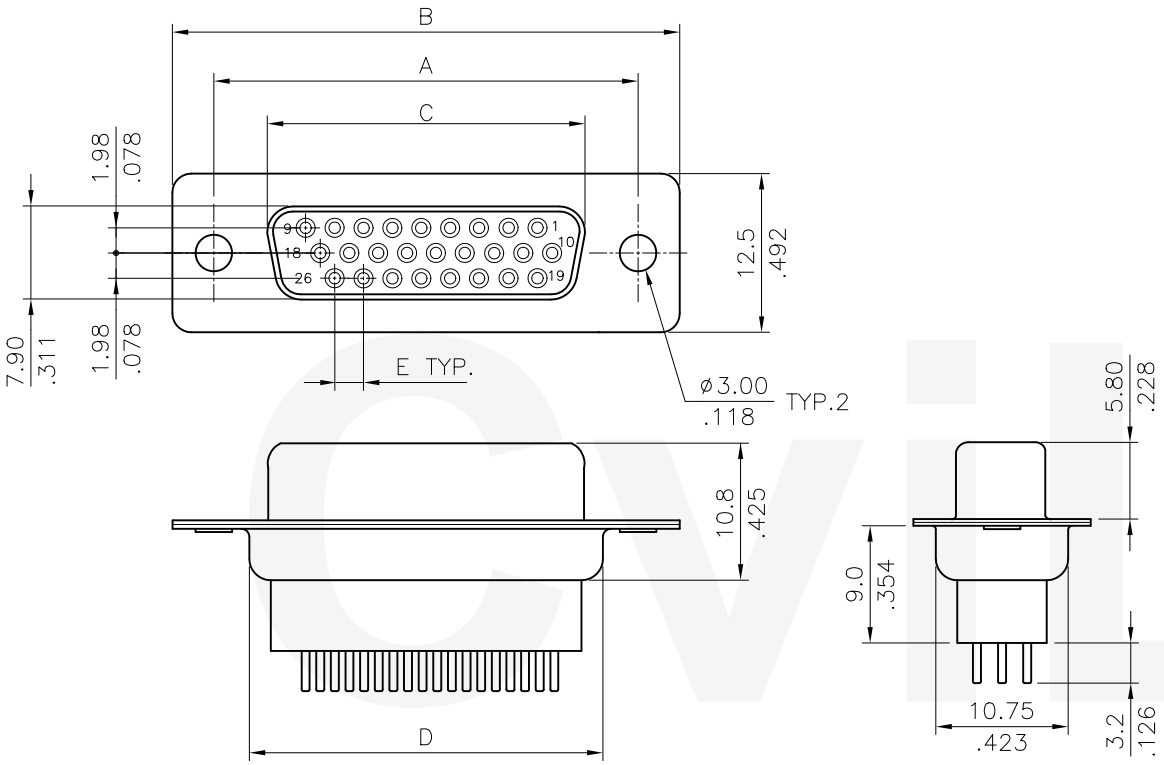

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.30(.642)	19.20(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	24.60(.969)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.30(2.256)	2.41(.095)

Ordering Code :

CD04 ① 26 ② S ③ 2 ④ 1 ⑤ 00 ⑥

① Series No.
② No. of Circuits
③ Concact type:S= Receptacle(Female)
④ Plating option:
- 2= Gold flash plated over Nickel
- A= Selective Gold flash plated over Nickel
- B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
- C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Color: 1= Black
⑥ Other Option:
- 00= With ø3.00mm holes on shell(Standard)
- B0= Riveted #4-40 UNC open nuts on front shell
- C0= Riveted #4-40 UNC open nuts on rear shell
- D*= Riveted #4-40 UNC close ground stand-off on rear shell

Lead Free Process

RoHS Compliant

Mounting Style

Code	00	Code	B0	Code	C0	Code	D*
		DIM. L= 4.0mm		DIM. L= 4.0mm			

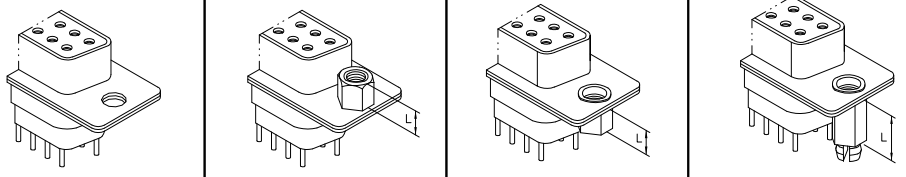

SYM	NAME	DATE	REVISIONS
4			
3			
2	Ken	3/12-18'	ECRT117079/ECNT118047
1	Sandy	3/25-10'	ECN10079

CVILUX CORP 2018.03.22 ISSUED

		DATE
DRAWN BY:	Ken	3/12-18'
ENGINEER:	Sun	3/13-18'
CHECKED BY:	Eisley	3/15-18'
APPROVED BY:	Eisley	3/15-18'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.010	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: HIGH-DENSITY D-SUB TOP ENTRY HIGH PROFILE BOARD MOUNT FEMALE CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CD0403SE	PART NO.	CD04**S*1**
SCALE	2 / 1	SHEET	1 OF 1