

A = 2.00 \* No. of Spaces  
 B = A + 2.4  
 \* Available in 4 through 80 circuits


Note:

- \* Insulation: High Temperature Plastic UL 94V-0
- \* Contact: Phosphor Bronze
- \* For Lead-Free Wave Reflow process

Ordering Code:


CB74 \*\* 2 V 1 00 -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
 2= Gold flash plated over  
 1.27μm(50μ") Nickel
- ④ Tail Style: V= Straight
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard
- ⑦ -NH= For Leadfree Wave Process and Halogen-Free

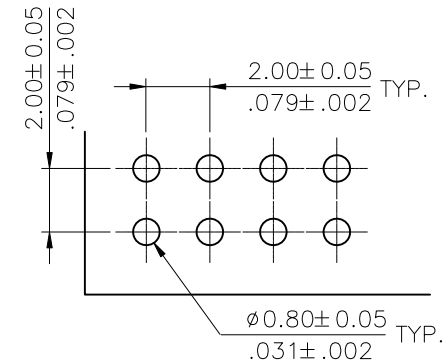

Recommended P.C. Board Layout

Halogen-Free  
 Lead Free Process  
 RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") DUAL ROW BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation	DRAWING NO. CB7428SA	PART NO. CB74**2V100-NH
3				DRAWN BY: Enya	1/14-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
2					ENGINEER: Sun	1/14-14'	.X ± 0.30 / .012 X' ± 1"	FINISH:		
1					CHECKED BY: Eisley	1/15-14'	.XX ± 0.20 / .008 .X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	1/15-14'	.XXX ± 0.10 / .004 .XX' ±				

