
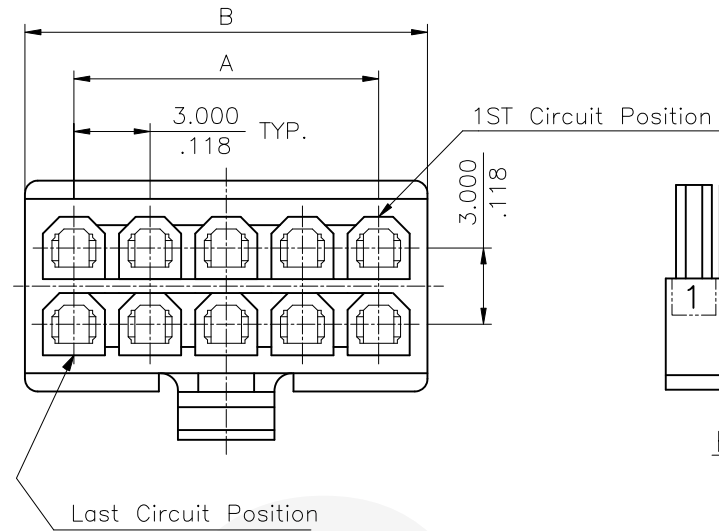


BACK VIEW


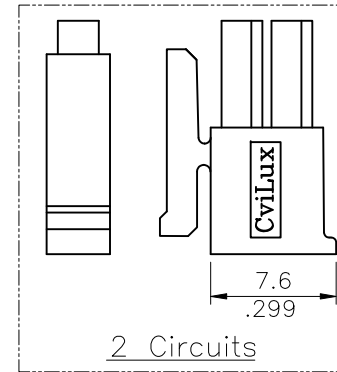


Material: Nylon 66 UL 94V-0

Ordering Code:

CP35 ** S 001 0 -NH
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Connector:
③ Contact type: S = Receptacle
④ Color: 001 = Color Black
⑤ Option: 0 = Standard
⚠ ⑥ -NH= Halogen-Free

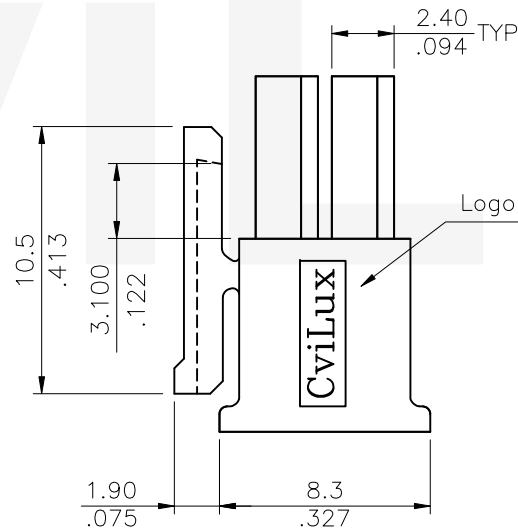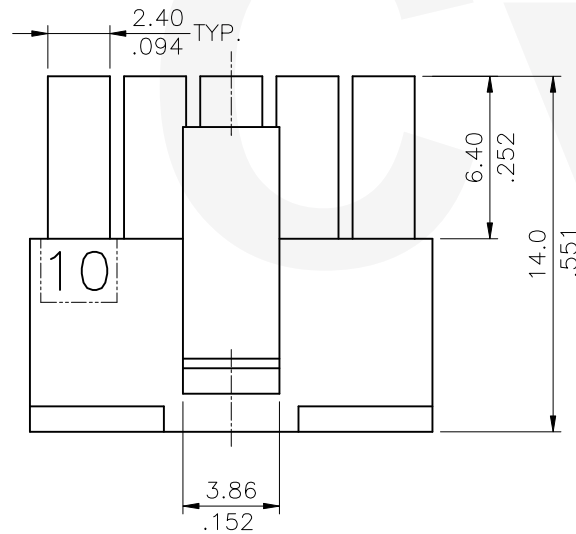

Circuits	Dimension	
	A	B
2	—	3.9(.154)
4	3.00(.118)	6.9(.272)
6	6.00(.236)	9.9(.390)
8	9.00(.354)	12.9(.508)
10	12.00(.472)	15.9(.626)
12	15.00(.591)	18.9(.744)
14	18.00(.709)	21.9(.862)
16	21.00(.827)	24.9(.980)
18	24.00(.945)	27.9(1.098)
20	27.00(1.063)	30.9(1.217)
22	30.00(1.181)	33.9(1.335)
24	33.00(1.299)	36.9(1.453)

Halogen-Free

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH POWER CONNECTOR FEMALE HOUSING	 瀚荃股份有限公司 CviLux Corporation		
③						DRAWN BY: Sandy	6/11-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
②						ENGINEER: Sun	6/19-19'	.X ±0.30/.012 .X' ± 1'			
①	Sandy	6/11-19'	ECNT119143			CHECKED BY: Eisley	7/04-19'	.XX ±0.20/.008 .X' ±			
SYM	NAME	DATE	REVISIONS			APPROVED BY: Eisley	7/04-19'	.XXX ±0.10/.004 .XX' ±	CUSTOMER: HL0142 F5T0051	DRAWING NO. CP3589SB	PART NO. CP35**S0010-NH
									SCALE	3 / 1	SHEET 1 OF 1

