
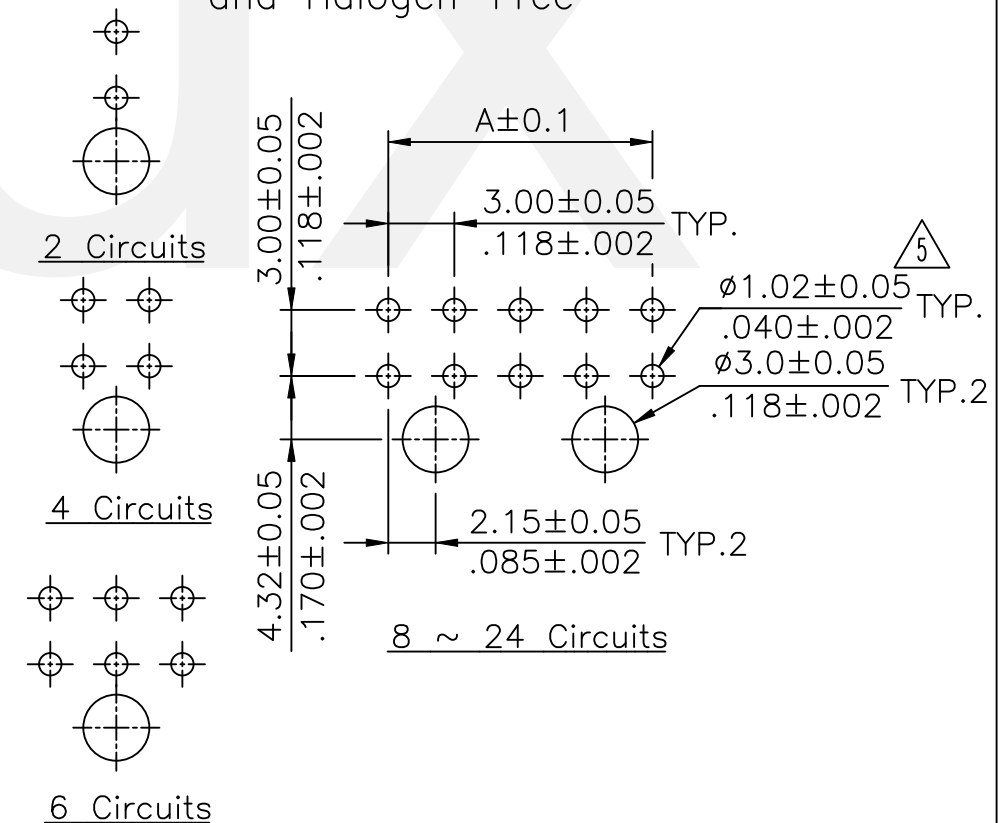
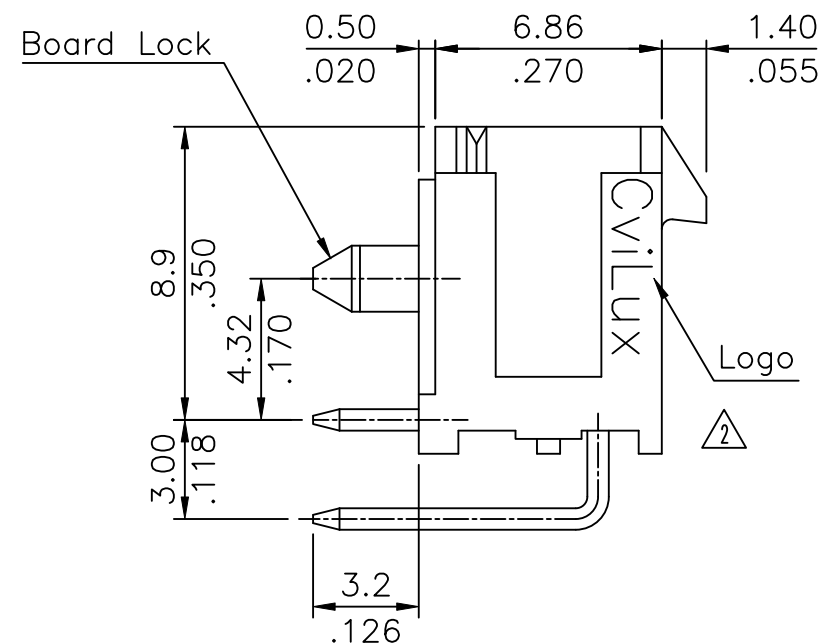
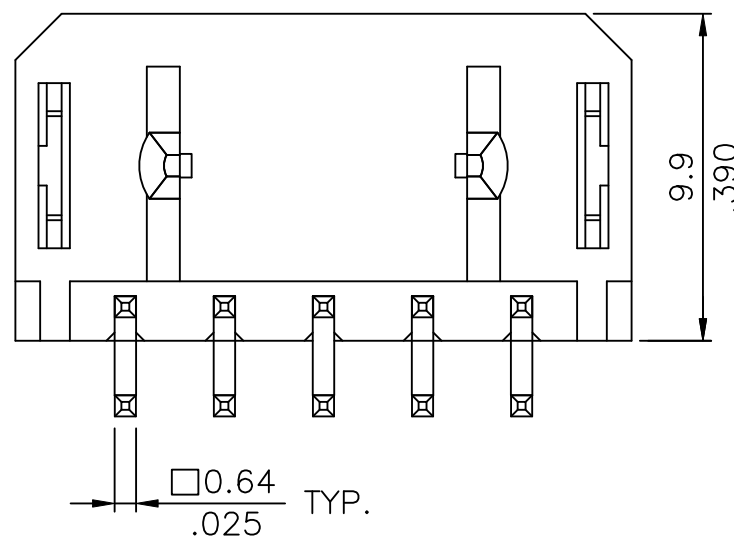


△4* Insulation: High Temperature Plastic
Color Black △3

Circuits	Dimension		
	A	B	C 
2	—	6.7(.264)	3.0(.118)
4	3.00(.118)	9.7(.382)	3.0(.118)
6	6.00(.236)	12.7(.500)	3.0(.118)
8	9.00(.354)	15.7(.618)	7.7(.303)
10	12.00(.472)	18.7(.657)	10.7(.421)
12	15.00(.591)	21.7(.854)	13.7(.539)
14	18.00(.709)	24.7(.972)	16.7(.657)
16	21.00(.827)	27.7(1.091)	19.7(.776)
18	24.00(.945)	30.7(1.209)	22.7(.894)
20	27.00(1.063)	33.7(1.327)	25.7(1.012)
22	30.00(1.181)	36.7(1.445)	28.7(1.130)
24	33.00(1.299)	39.7(1.563)	31.7(1.248)

CP35	**	P	1	H	0	0	-NH
①	②	③	④	⑤	⑥	⑦	⑧

- ① Series No.
- ② No. of Circuite: 02~24
- ③ Conact type: P = Plug
- ④ Contact plated:
△ 1= Matte Tin over Nickel
2= Gold flash plated over 50u" Nickel
- ⑤ H= Right angle
- ⑥ Mount type : 0= Dip Type
- ⑦ Other options: 0= With plastic board lock
(Standard)
- ⑧ -NH= For Lead Free Reflow Processes
and Halogen-Free

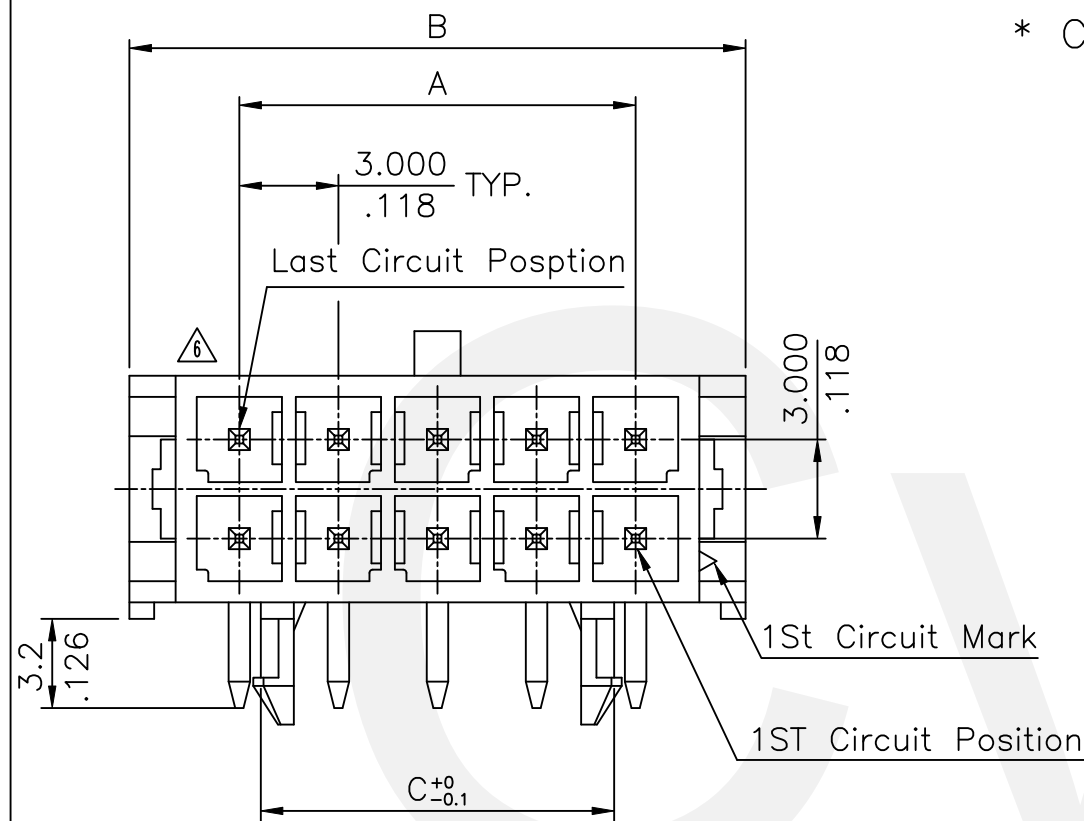

Halogen-Free

Lead Free Process

RoHS Compliant

△6	Wayne	05/05-25'	ECNT125108			DATE	UNIT: mm / inch		TITLE: 3.00mm PITCH RIGHT ANGLE HEADER POWER CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
△5	Kenny	8/20-20'	ECNT120218	DRAWN BY:	Wayne	05/05-25'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
△4	Michelle	11/12-19'	ECRB11905/ECNT119315	ENGINEER:	Sun	05/05-25'			.X ± 0.30/.012 X.* ± 1'		MATERIAL:		
△3	Sun	8/14-14'	ECRT114036/ECNT114170	CHECKED BY:	Eisley	05/05-25'	.XX ± 0.20/.008 X.* ±		FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	05/05-25'	.XXX ± 0.10/.004 XX.* ±			DRAWING NO.	CP3549SH	PART NO.	CP35**P*H00-NH
										SCALE	3 / 1	SHEET	1 OF 1