


Material:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△6 * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0506S*

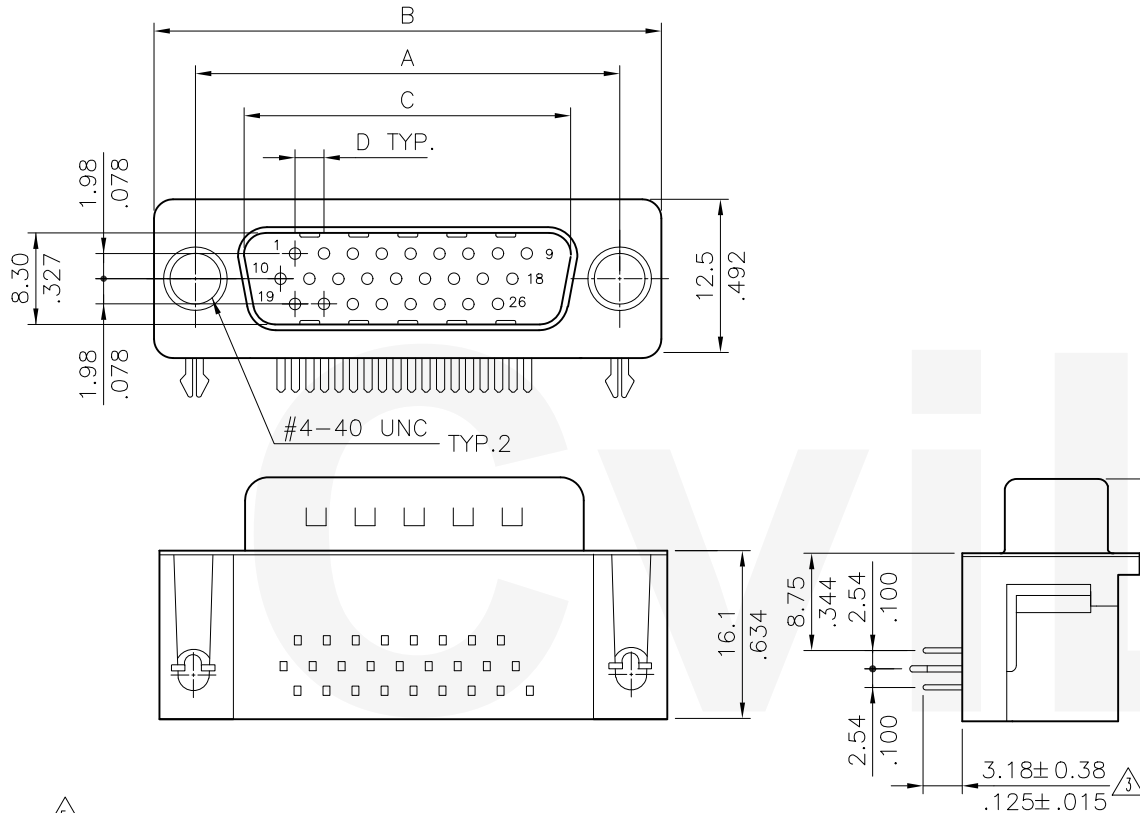

Ordering Code:

CD05 26 P 2 1 F0
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Plug(Male)
- ④ Plating option:
 2= Gold flash plated over Nickel
 A= Selective Gold flash plated over Nickel
 B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 C= Selective 0.76um(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black; 0= White; 7= Blue
- ⑥ Other Option:
 F0= Riveted ground hooks with #4-40 UNC open (Standard)
 △4 G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screw (For Circuits 15, 44)
 △2 I0= Riveted ground tabs thread #4-40 UNC open and ground tabs with ø3.05mm holes
 J0= Assembly ground hooks by #4-40 UNC Hex screw

Mounting Style		Lead Free Process		RoHS Compliant			
Code	F0	Code	G0	Code	I0	Code	J0
DIM. L= 4.8mm		DIM. L= 4.8mm		DIM. L= 4.8mm		DIM. L= 4.8mm	

△6	Ken	3/12-18'	ECRT117079/ECNT118047		DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB PCB MOUNT MALE CONNECTOR	瀚荃股份有限公司 CviLux Corporation
△5	Karen	11/20-15'	ECNT115246/ECRT115101	DRAWN BY: Ken	3/12-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
△4	Karen	9/22-15'	ECNT115220/ECRT115084	ENGINEER: Sun	3/13-18'	.X ± 0.30/.012 X' ± 1'	FINISH:	
△3	Karen	10/16-14'	ECNT114233/ECRT114080	CHECKED BY: Eisley	3/15-18'	.XX ± 0.20/.010 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/15-18'	.XXX ± 0.10/.004 XX' ±		DRAWING NO. CD0504SL PART NO. CD05**P*1** SCALE 2 / 1 SHEET 1 OF 1