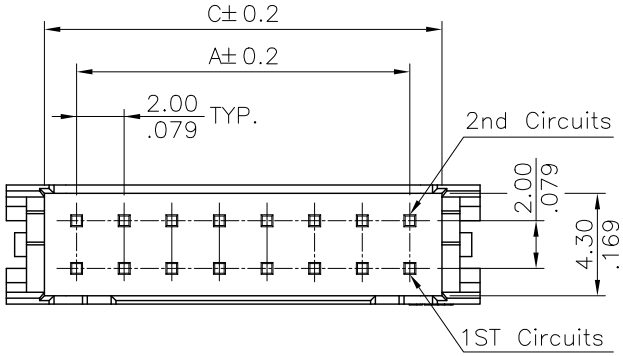

Note:

1. Material:
   - * Insulation: Nylon 6T UL 94V-0
     Color Nature(Halogen-Free)
   - * Contact: Brass
2. △1 For Lead Free Wave flow Process

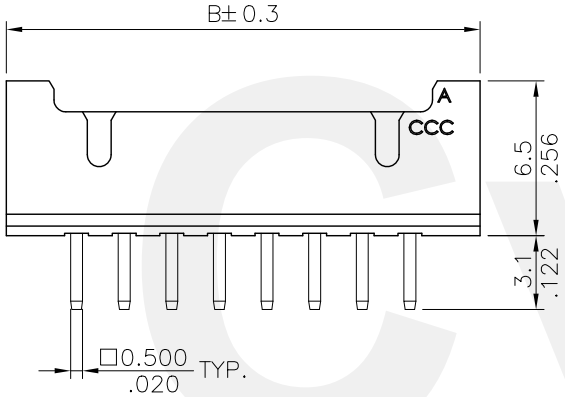

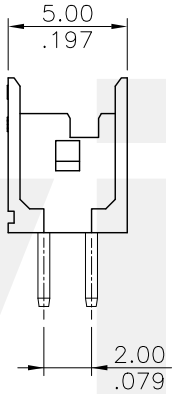

Ordering Code:

CI01 ** P 1 V D L -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② No. of circuits
③ Contact type: P= Pin Header
④ Plating option:
1= 3.05μm (120μ") Tin over
0.76μm(30μ") Nickel (Matte Tin Finish)
⑤ Type: V= Straight type
⑥ Row Option: D= Dual row
⑦ Latch option: L= With Locking Latch
⑧ Other option:
-NH= For Lead Free Wave flow Process
and Halogen-Free

A = 2.0 x (No. of Circuits/2-1)
B = A + 5.9
C = A + 2.7
* Available in 6 through 34 circuits

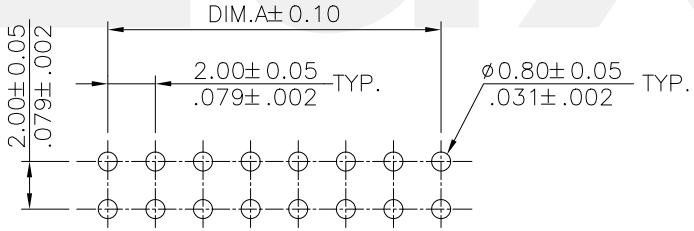

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Enya	3/7-13'	ECN13056-0/ECR13007-1

CVILUX CORP 2013.05.16 ISSUED

		DATE
DRAWN BY:	Enya	3/07-13'
ENGINEER:	Eisley	3/12-13'
CHECKED BY:	Eisley	3/12-13'
APPROVED BY:	David	3/12-13'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 2.00mm PIN HEADER DIP TYPE

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI0127AB	PART NO.	CI01**P1VDL-NH
SCALE	3 / 1	SHEET 1 OF 1	