

Notes:



- * Insulation: High Temperature Plastic, Color Black
- * Contact: Brass
- * Fixed Tabs: Brass with Matte Tin Plated
- * For Lead Free IR Reflow Process

CIRCUITS	DIM. A	DIM. B
2	—	6.7(.264)
4	3.00(.118)	9.7(.382)
6	6.00(.236)	12.7(.500)
8	9.00(.354)	15.7(.618)
10	12.00(.472)	18.7(.736)
12	15.00(.591)	21.7(.854)
14	18.00(.709)	24.7(.972)
16	21.00(.827)	27.7(1.091)
18	24.00(.945)	30.7(1.209)
20	27.00(1.063)	33.7(1.327)
22	30.00(1.181)	36.7(1.445)
24	33.00(1.299)	39.7(1.563)



Ordering Code:

CP35 ** P * V S T -NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuite: 02~24
- ③ Contact type: P= Plug
- ④ Contact plated:
 - 1= Matte Tin Plated over Nickel
 - A= Selective Gold Flash Plated over 1.27μm(50μ") Nickel
 - B= Selective 0.38μm(15μ") Gold Plated over 1.27μm(50μ") Nickel
 - C= Selective 0.76μm(30μ") Gold Plated over 1.27μm(50μ") Nickel
- ⑤ V= Straight
- ⑥ Mount type : S= SMT Type
- ⑦ Other options:T= With fixed tabs
- ⑧ NH= For Lead Free IR Process & Halogen Free

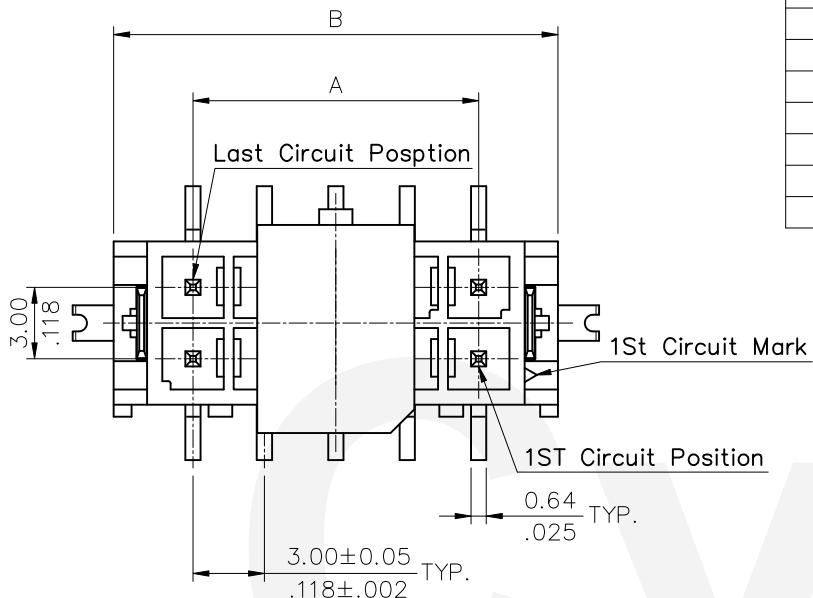

For 2,4,6 Circuits

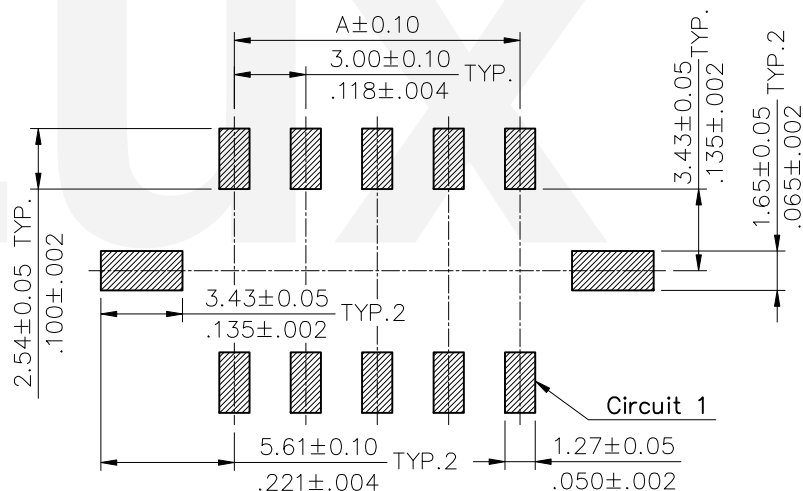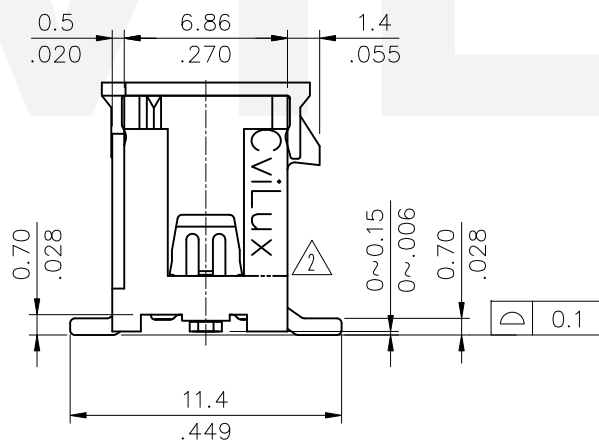


Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH STRAIGHT SMT TYPE POWER CONN.	 瀚荃股份有限公司 CviLux Corporation
④								
③								
②	Eric	3/29-21'	ECRT121017/ECNT121085	DRAWN BY: Eric	3/29-21'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	DRAWING NO. CP35113SC
①	Michelle	11/12-19'	ECRB11905/ECNT119313	ENGINEER: Sun	3/31-21'	.X ± 0.30/.012 X' ± 1'	FINISH:	PART NO. CP35**P*VST-NH
				CHECKED BY: Eisley	4/1-21'	.XX ± 0.20/.008 .X' ±		SCALE 3 / 1
				APPROVED BY: Eisley	4/1-21'	.XXX ± 0.10/.004 .XX' ±		SHEET 1 OF 2

CVILUX CORP
 2021.04.08
 ISSUED

