


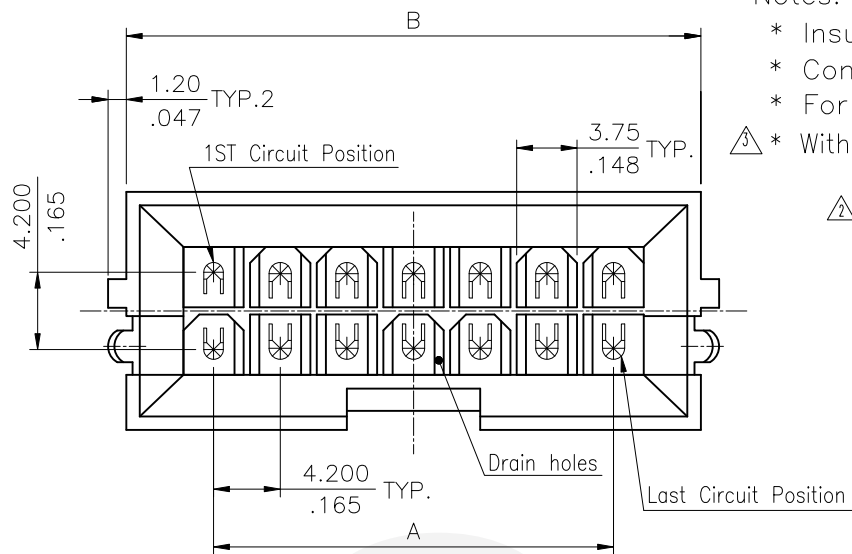

Notes:





- * Insulation: Nylon 66, Color Nature
- * Contact: Brass
- * For Tin-Lead Wave Flow Process
- * With drain holes shown

Circuits	Dimension	
	A	B
4	4.20(.165)	15.1(.594)
6	8.40(.331)	19.3(.760)
8	12.60(.496)	23.5(.925)
10	16.80(.661)	27.7(1.091)
14	25.20(.992)	36.1(1.421)
16	29.40(1.157)	40.3(1.587)
18	33.60(1.323)	44.5(1.752)
24	46.20(1.819)	57.1(2.248)

Ordering Code:

CP-01 3 ** 1 * 0
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Type of Connector:
3= Straight PCB mount header
③ No of Circuits: See below table
④ Plating Code:
1= 2.54 μ m(100 μ) Tin over 1.02 μ m(40 μ) Nickel
A= Selective gold flash plated over 1.27 μ m(50 μ) Nickel
B= Selective 0.38 μ m(15 μ) gold plated over 1.27 μ m(50 μ) Nickel
C= Selective 0.76 μ m(30 μ) gold plated over 1.27 μ m(50 μ) Nickel
I= Selective 0.38 μ m(15 μ) gold plated over contact area & gold flash plated over solder tail above 1.27 μ m(50 μ) Nickel
J= Selective 0.76 μ m(30 μ) gold plated over contact area & gold flash plated over solder tail above 1.27 μ m(50 μ) Nickel
⑤ Variation:
6= UL 94V-2, B.M.I type
7= UL 94V-0, B.M.I type
⑥ Other Option: 0= Standard

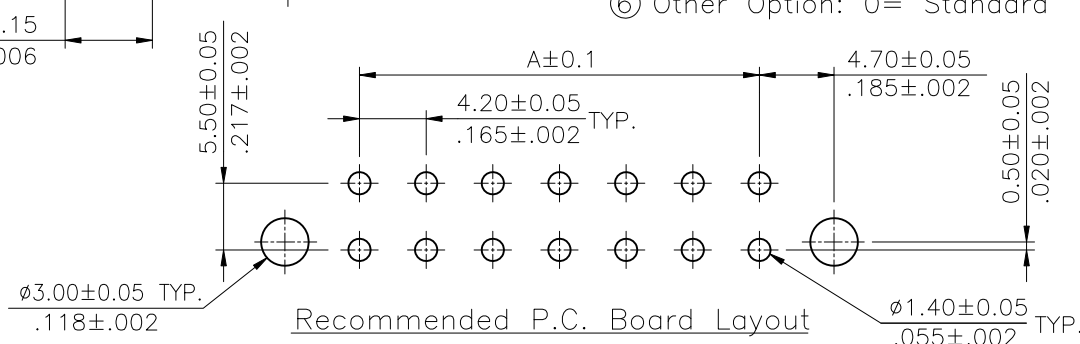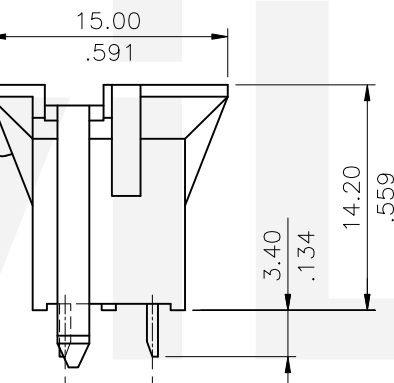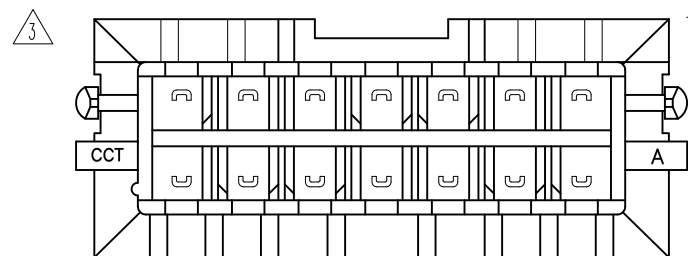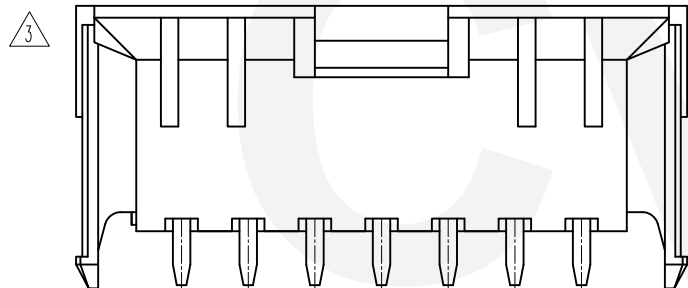

Halogen-Free

Tin-Lead Process

RoHS Compliant

④				DATE	UNIT: mm / inch	TITLE: 4.2mm(.165") PITCH BMI TYPE PLUG CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
③	Sandy	3/12-21'	ECNT121071/ECRT121011	3/26-21'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
②	Enya	4/22-13'	ECN13088-0	3/29-21'	.X ± 0.38/.015 X' ± r	FINISH:	DRAWING NO.	CP0124SH	PART NO.	CP-013***60 CP-013***70
①	SUN	9/03/03'	ECN03280	4/5-21'	.XX ± 0.25/.010 X' ±		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/5-21'	.XXX ± 0.10/.004 XX' ±				

CIVILUX CORP
2021.04.08
ISSUED