

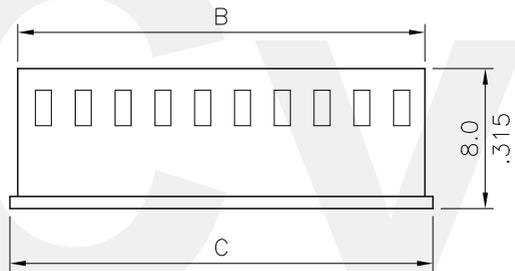


* Material: Nylon 66 UL 94V-2
Color Nature

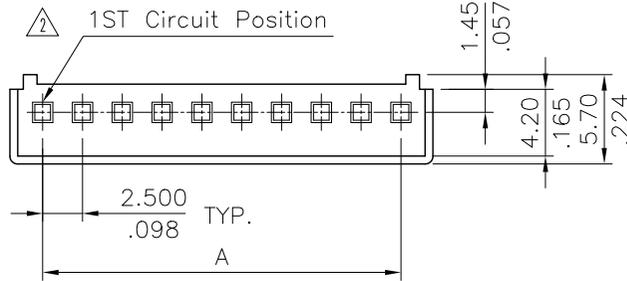

Circuits	Dimension		
	A	B	C
2	2.50(.098)	6.0(.236)	7.20(.283)
3	5.00(.197)	8.5(.335)	9.70(.382)
4	7.50(.295)	11.0(.433)	12.20(.480)
5	10.00(.394)	13.5(.531)	14.70(.579)
6	12.50(.492)	16.0(.630)	17.20(.677)
7	15.00(.591)	18.5(.728)	19.70(.776)
8	17.50(.689)	21.0(.827)	22.20(.874)
9	20.00(.787)	23.5(.925)	24.70(.972)
10	22.50(.886)	26.0(1.024)	27.20(1.071)
11	25.00(.984)	28.5(1.122)	29.70(1.169)
12	27.50(1.083)	31.0(1.220)	32.20(1.268)

Halogen-Free **RoHS Compliant**

4					DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") CRIMP TERMINAL HOUSING
3					DRAWN BY: Sandy	11/11-10'	MATERIAL:
2	Sandy	11/10-10'	ECN10365		ENGINEER: Clark	11/22-10'	
1	Jim	5/17/06'	ECR06036-0/ECN06143		CHECKED BY: David	11/22-10'	FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	11/22-10'	

CVILUX CORP
2010.11.30
ISSUED



瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	C12301SC	PART NO.	C123**S0000
SCALE	2 / 1	SHEET	1 OF 1