

Notes:

1. Material:

Insulation: Nylon 6, Color Nature


2. Circuit Pattern Schedule: See Drawing No. CP0104S*



3. Glow wire requirement:

IEC 60695-2-12 GWFI 960°C@0.38mm & 930°C@0.75mm & 960°C@1.50mm & 960°C@3.00mm

IEC 60695-2-11 GWEPT 750°C ≤2S

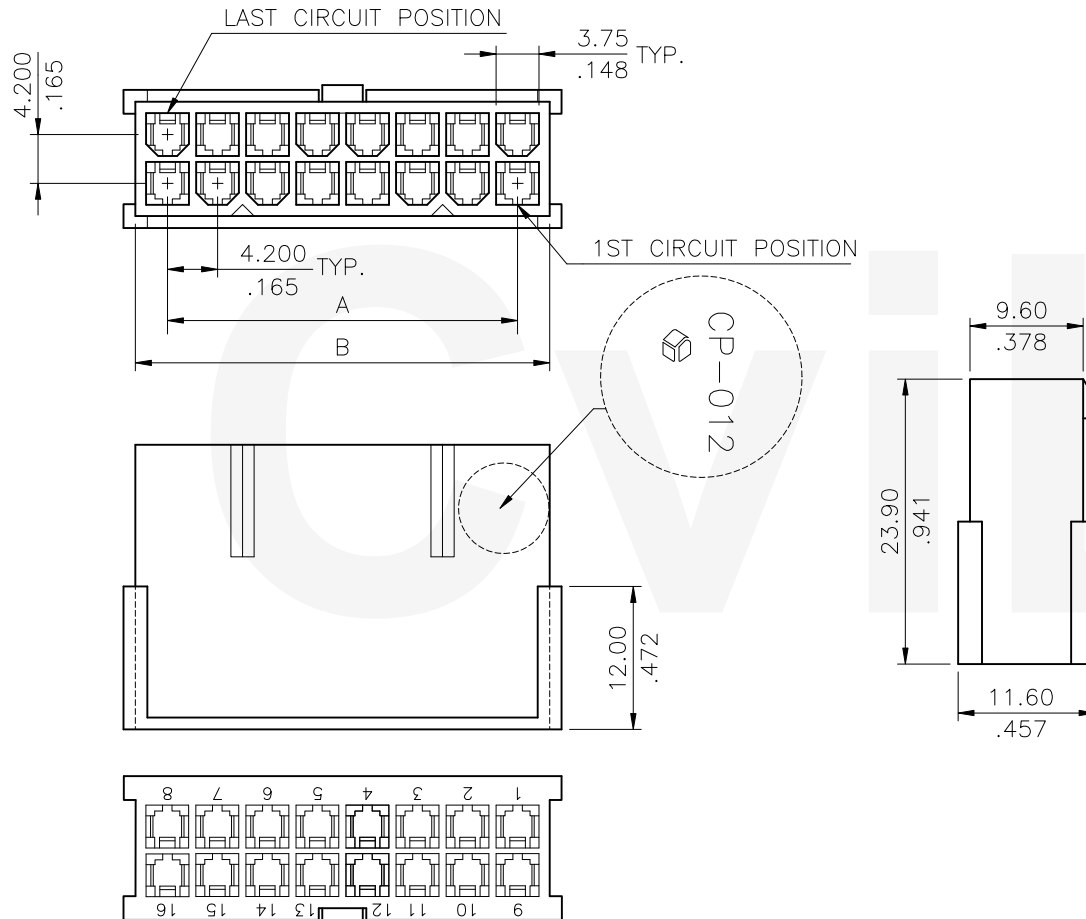

Ordering Code:

CP-01 2 ** 0 E 0
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Type of Connector: 2= Plug
③ No of Circuits:
④ Plating Code: 0= Non plating
⑤ Variation: E= UL 94V-2, Without mounting ears
(Glow wire available)
⑥ Option: 0= Standard

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3						DRAWN BY: Kenny	8/26-20'	PLUG CP-01 POWER CONNECTOR				
2						ENGINEER: Sun	9/1-20'	MATERIAL:	DRAWING NO.	CP0147AB	PART NO.	CP-012**0E0
1	Kenny	8/26-20'	ECNT120227			CHECKED BY: Eisley	9/4-20'	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS			APPROVED BY: Eisley	9/4-20'					