

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CB96 ** 2 V 1 00
 ① ② ③ ④ ⑤ ⑥

① Series No.

② NO. of Circuits:


③ Plating code:

2= Gold flash plated over
 1.27 μ m(50 μ "") Nickel

④ Tail Style: V= Straight

⑤ Color: 1= Black

⑥ Other options: 00= Standard

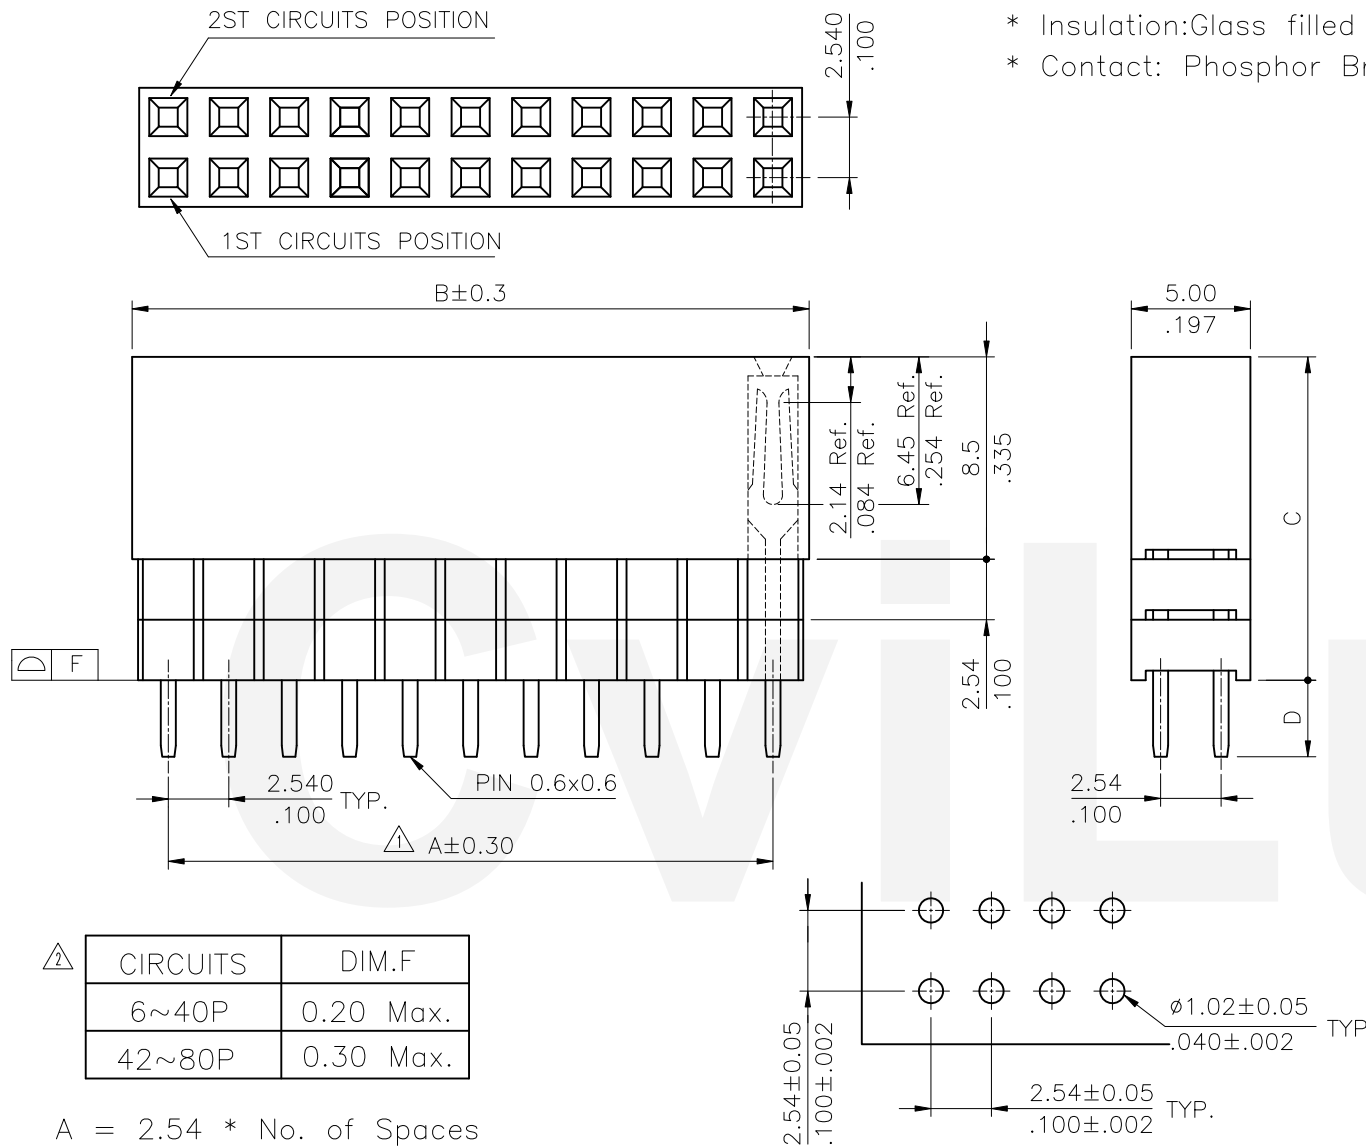

Option Code	Dimension	
	C	D
00	11.05(.435)	2.3(.091)
1Y	11.05(.435)	7.3(.287)
2Y	13.59(.535)	4.8(.189)
3Y	16.13(.635)	2.3(.091)
4Y	18.67(.735)	2.3(.091)
5Y	15.50(.610)	2.70(.106)
1Z	11.05(.435)	12.2(.480)
2Z	13.59(.535)	9.6(.378)
3Z	16.13(.635)	7.1(.280)
4Z	18.67(.735)	4.6(.181)
2W	13.59(.535)	3.4(.134)
2V	13.58(.535)	3.00(.118)
1A	12.50(.492)	3.00(.118)

CIRCUITS	DIM.F
6~40P	0.20 Max.
42~80P	0.30 Max.

A = 2.54 * No. of Spaces

B = A + 3.04

* Available in 6 through 80 circuits

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW ELEVATED CONNECTOR
④	Sun	12/20-19'	ECNT119368				
③	Ken	6/22-18'	ECNT118141	DRAWN BY: Sun	12/19-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30 / .012 X' ± 1" .XX ± 0.20 / .008 X' ± .XXX ± 0.10 / .004 XX' ±	MATERIAL: FINISH:
②	Karen	9/30-09'	ECN09203	ENGINEER: Sun	12/19-19'		
①	Karen	6/27-08'	ECN08303	CHECKED BY: Eisley	12/23-19'		
①	Karen	6/27-08'	ECN08303	APPROVED BY: Eisley	12/23-19'		

CVILUX
 2019.12.26
 ISSUED



瀚荃股份有限公司
 CviLux Corporation

DRAWING NO.	CB9601SH	PART NO.	CB96**2V1**
SCALE	3 / 1	SHEET	1 OF 1