
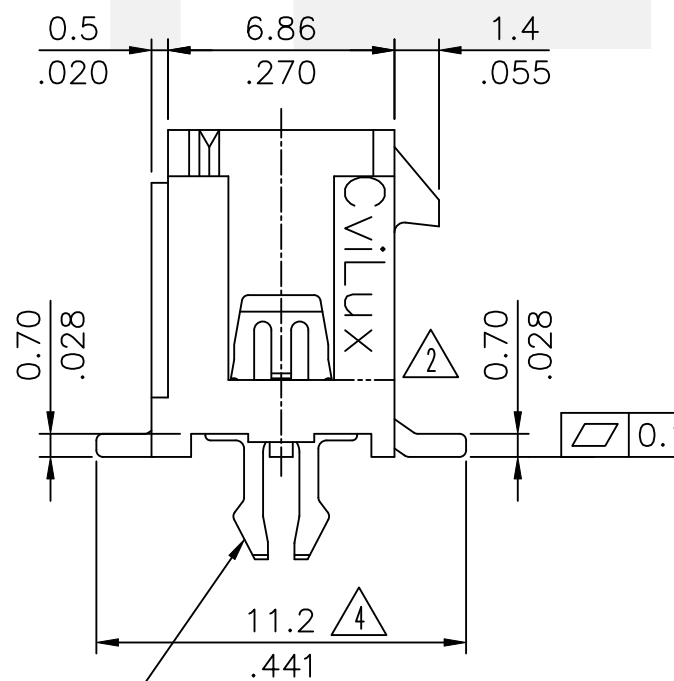


△1 * Insulation: High temperature plastic,
Color Black
* Contact: Brass

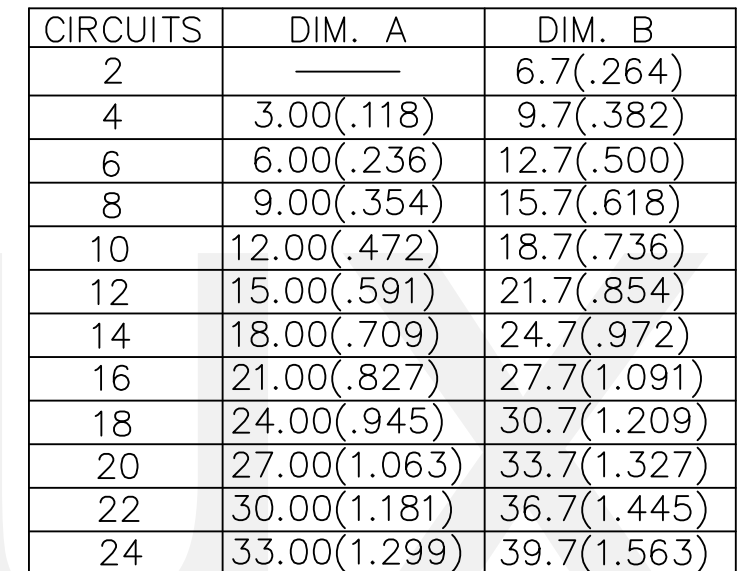


Lead Free Process

Halogen-Free

RoHS Compliant

4	Wei	05/27-26'	ECRT126014/ECNT126081			DATE	UNIT: mm / inch		TITLE: 3.00mm PITCH STRAIGHT SMT TYPE POWER CONN.	 瀚荃股份有限公司 CviLux Corporation			
3	Wayne	05/08-25'	ECNT125108	DRAWN BY:	Wei	05/27-26'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2	Eric	3/29-21'	ECRT121017/ECNT121085	ENGINEER:	Sun	05/27-26'	.X ± 0.30/.012	X* ± 1"	MATERIAL:	DRAWING NO.	CP35213SE	PART NO.	CP35**P*VS0-NH
1	Michelle	11/18-19'	ECRB11905/ECNT11905	CHECKED BY:	Eisley	05/27-26'	.XX ± 0.20/.008	X* ±		FINISH:	SCALE	3 / 1	SHEET
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	05/27-26'	.XXX ± 0.10/.004	.XX* ±					

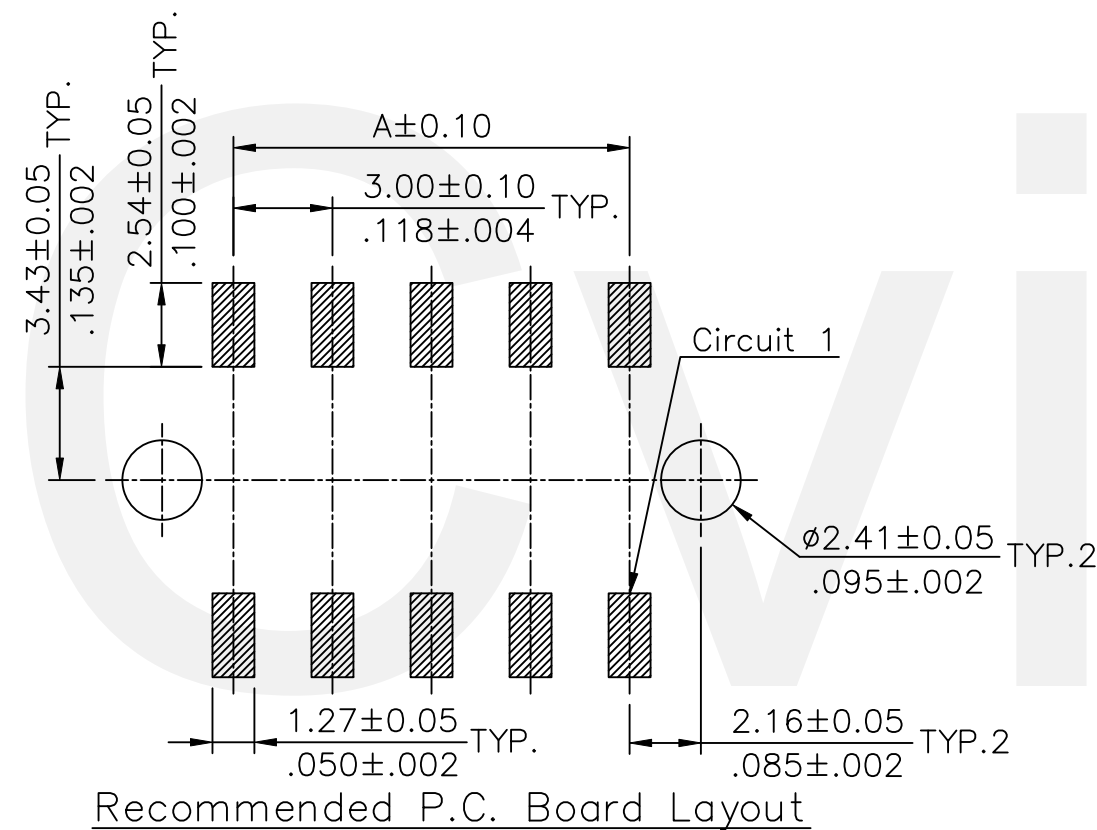

Ordering Code:

CP35 ** P * V S 0 - NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Series No.
- No. of Circuite: 02~24
- Concact type: P= Plug
- Contact plated:
 - 1= Matte Tin Plated over Nickel
 - A= Selective Gold Flash Plated over 1.27 μm (50 μ ") Nickel
 - B= Selective 0.38 μm (15 μ ") Gold Plated over 1.27 μm (50 μ ") Nickel
 - C= Selective 0.76 μm (30 μ ") Gold Plated over 1.27 μm (50 μ ") Nickel
- V= Straight
- Mount type : S= SMT Type
- Other options: 0= With metal board lock (Standard)
- NH= For Lead Free Reflow Processes and Halogen-Free

Lead Free Process

Halogen-Free

RoHS Compliant

4	Wei	05/27-26'	ECRT126014/ECNT126081		DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH STRAIGHT SMT TYPE POWER CONN.	瀚荃股份有限公司 CviLux Corporation			
3	Wayne	05/08-25'	ECNT125108	DRAWN BY: Wei	05/27-26'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2	Eric	3/29-21'	ECRT121017/ECNT121085	ENGINEER: Sun	05/27-26'	.X ± 0.30/.012 X.* ± 1"	FINISH:	DRAWING NO.	CP35213SE	PART NO.	CP35**P*VS0-NH
1	Michelle	11/18-19'	ECRB11905/ECNT11908	CHECKED BY: Eisley	05/27-26'	.XX ± 0.20/.008 X.* ±		SCALE	3 / 1	SHEET	2 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	05/27-26'	.XXX ± 0.10/.004 .XX* ±					