


A = 3.96 \* No. of Spaces

B = A + 3.96

\* Available in 2 through 20 circuits

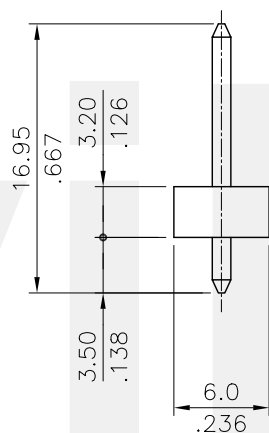

Material:


\* Insulation: Glass filled polyester UL 94V-0

\* Contact: Brass

Ordering Code:

CI77 \*\* P \* V 00  
 ① ② ③ ④ ⑤ ⑥

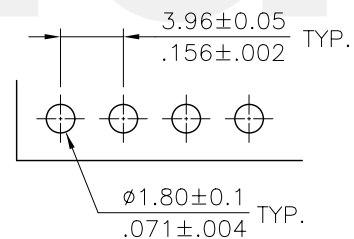

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:  
 1= 3.05μm(120μ") Min. Tin  
 over 0.76μm(30μ") Nickel  
 2= Gold flash plated over  
 1.27μm(50μ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Other Option: 00= Color White (Standard)



Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

4				 <b>2004.06.09</b> <b>ISSUED</b>		DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation	DRAWING NO.	CI7701SE	PART NO.	CI77**P*V00		
3					DRAWN BY:	Sun	06/09-04'	TOLERANCE		3.96MM(.156") BOARD MOUNT PIN HEADER	MATERIAL:	SCALE	2 / 1	SHEET	1 OF 1
2					ENGINEER:	Sun	06/09-04'	UNLESS OTHERWISE SPECIFIED			FINISH:				
1	SUN	6/09/04'	ECN04233		CHECKED BY:	David	06/09-04'	.X ± 0.38/.015 X' ± 1'							
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	06/09-04'	.XX ± 0.25/.010 X' ±								
						06/09-04'	.XXX ± 0.10/.004 .XX' ±								