

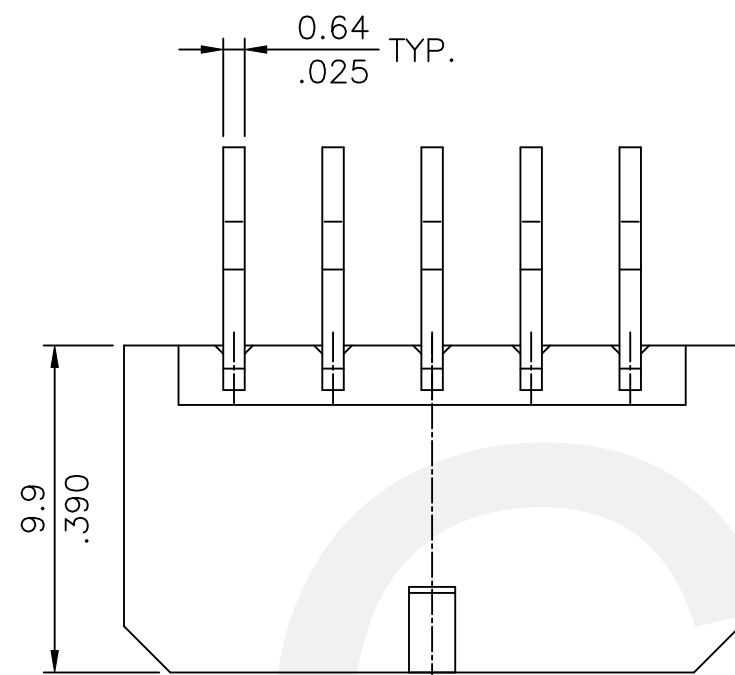
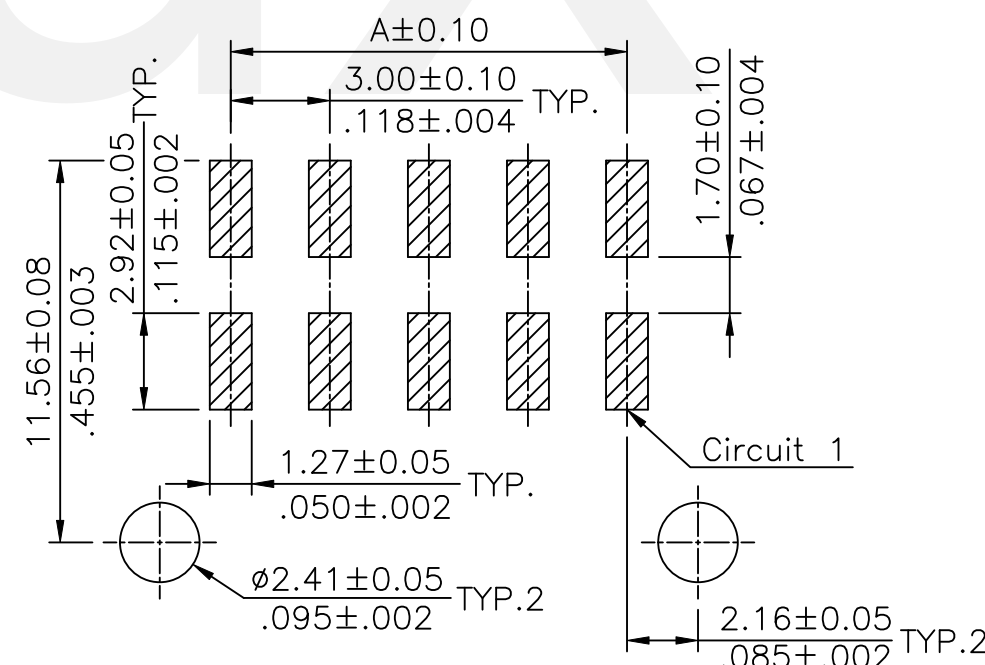


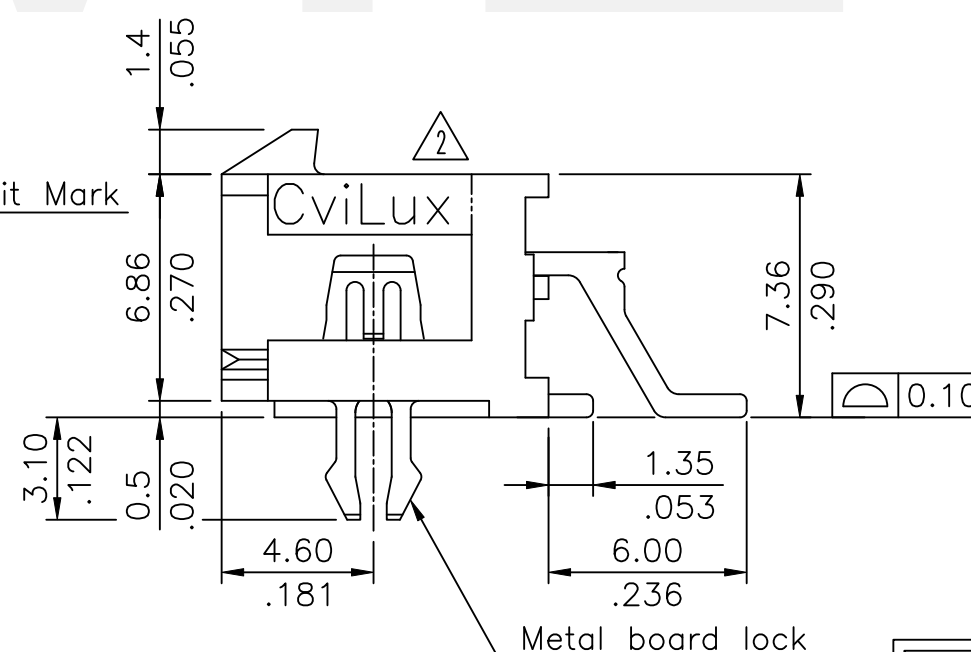

Material:
① * Insulation: High Temperature Plastic
Color Black
* Contact: Brass

CIRCUITS	DIM. A	DIM. B
2	—	6.7(.264)
4	3.00(.118)	9.7(.382)
6	6.00(.236)	12.7(.500)
8	9.00(.354)	15.7(.618)
10	12.00(.472)	18.7(.736)
12	15.00(.591)	21.7(.854)
14	18.00(.709)	24.7(.972)
16	21.00(.827)	27.7(1.091)
18	24.00(.945)	30.7(1.209)
20	27.00(1.063)	33.7(1.327)
22	30.00(1.181)	36.7(1.445)
24	33.00(1.299)	39.7(1.563)

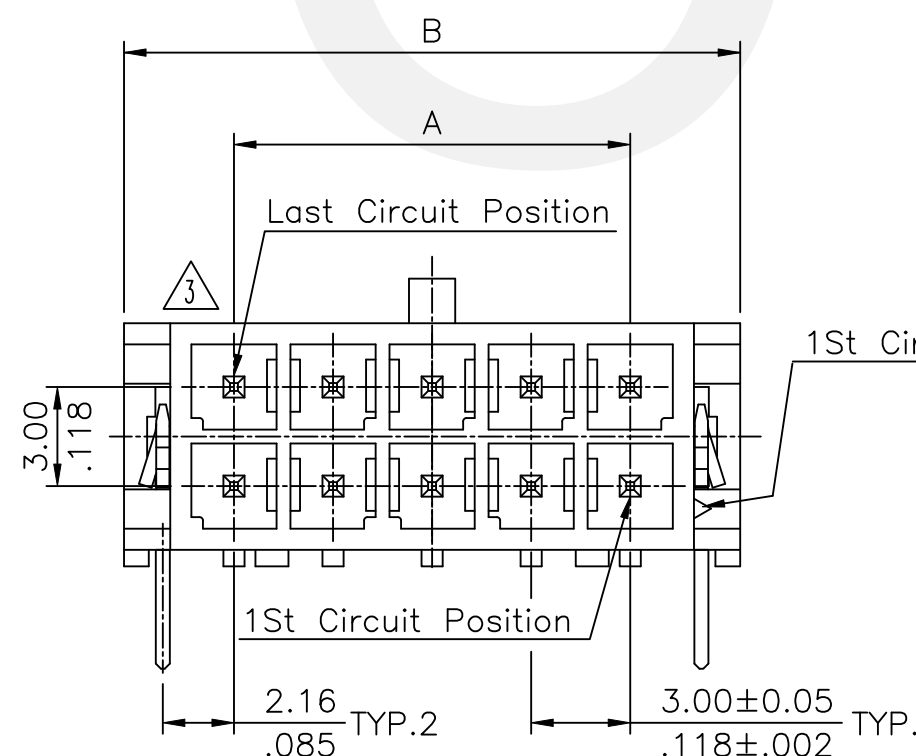

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH RIGHT ANGLE SMT TYPE POWER CONN.	 瀚荃股份有限公司 CviLux Corporation			
③	Wayne	05/08-25'	ECNT125108	DRAWN BY:	Wayne	05/08-25'					
②	Eric	3/29-21'	ECRT121017/ECNT121085	ENGINEER:	Sun	05/08-25'		DRAWING NO. CP35170SD PART NO. CP35**P*HS0-NH			
①	Michelle	11/18-19'	ECNT119313	CHECKED BY:	Eisley	05/08-25'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	05/08-25'		SCALE	3 / 1	SHEET	1 OF 1