
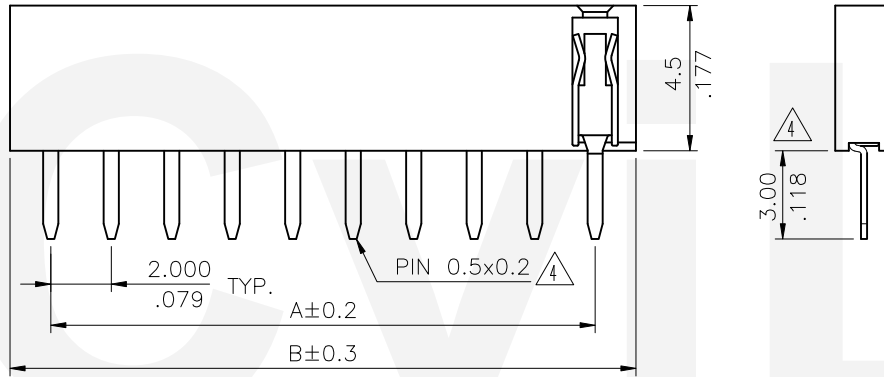


Note:

1. Material:
  - \* Insulation: Glass filled polyester UL 94V-0
  - \* Contact: Brass
2. For Tin Lead Wave Flow Process

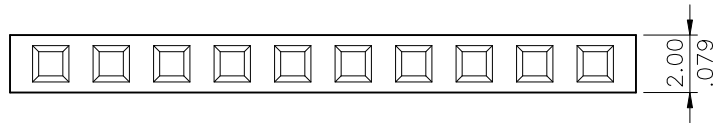

Ordering Code:


CB22 \*\* 2 V 1 00  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
2= Gold flash plated over 1.27μm(50μ") Nickel
- ④ Tail Style: V= Straight
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard

A = 2.00 \* No. of Spaces

B = A + 2.60

⑤ \* Available in 2 through 35 circuits



Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

⑤	Yushu	12/16-19'	ECNT119357/ECRT119060		DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") SINGLE ROW BOARD MOUNT CONNECTOR			
④	Karen	3/21-18'	ECNT118046/ECRT117082		DRAWN BY: Karen	12/17-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:	
③	Karen	7/08-15'	ECNT115151/ECRT115052		ENGINEER: Sun	12/25-19'	.X ± 0.30 / .012 X' ± 1"		DRAWING NO. CB2201SG PART NO. CB22**2V100	
②	LYNN	12/29-04	ECN04518		CHECKED BY: Easley	1/6-20'	.XX ± 0.20 / .008 .X' ±			FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY: Easley	1/6-20'	.XXX ± 0.10 / .004 .XX' ±			SCALE 4 / 1 SHEET 1 OF 1