

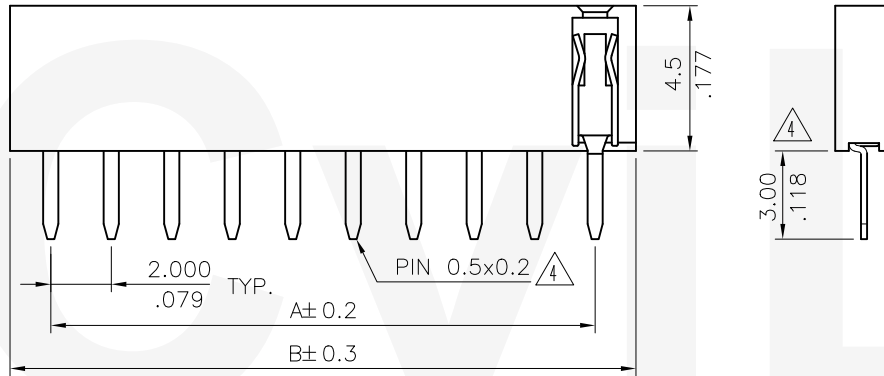


Note:

1. Material:
 - * Insulation: Glass filled polyester UL 94V-0
 - * Contact: Brass
2. For Tin Lead Wave Flow Process

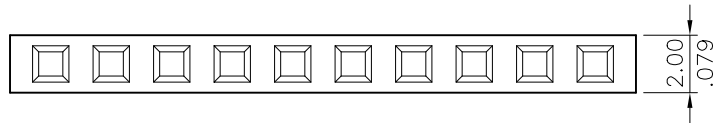


Ordering Code:

$\frac{CB22}{①}$
 $\frac{**}{②}$
 $\frac{2}{③}$
 $\frac{V}{④}$
 $\frac{1}{⑤}$
 $\frac{00}{⑥}$

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
 - 2= Gold flash plated over 1.27 μ m(50 μ) Nickel
- ④ Tail Style: V= Straight
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard


A = 2.00 * No. of Spaces
 B = A + 2.60
 * Available in 2 through 40 circuits



Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

④	Karen	3/21-18'	ECNT118046/ECRT117082		DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") SINGLE ROW BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
③	Karen	7/08-15'	ECNT115151/ECRT115052	DRAWN BY: Karen	3/21-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	LYNN	12/29-04'	ECN04518	ENGINEER: Sun	3/23-18'	.X ± 0.30 / .012 X* ± 1"	DRAWING NO. CB2201SF PART NO. CB22**2V100	
①	SUN	11/4/04'	ECN04436	CHECKED BY: Eisley	3/26-18'	.XX ± 0.20 / .008 .X* ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/26-18'	.XXX ± 0.10 / .004 .XX ±	SCALE 4 / 1 SHEET 1 OF 1	

2018.03.29
 ISSUED