
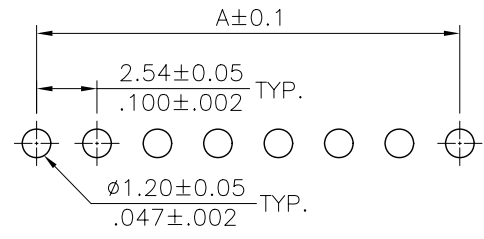


A = 2.54 x No. of Spaces
 B = A + 2.54
 * Available in 2 through 36 circuits

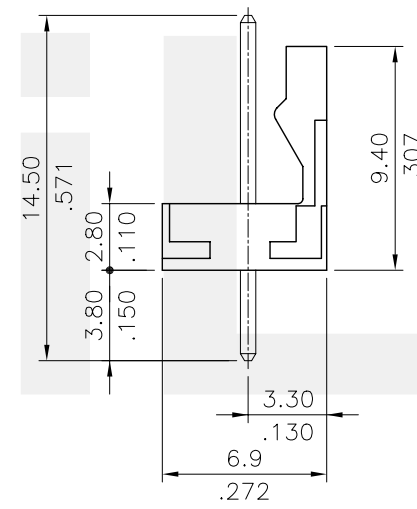

Recommended P.C. Board Layout

Material:
 * Insulation: Glass filled polyester UL 94V-0
 Color White(Nature)


* Contact: Brass

Ordering Code:

CI83 ** P * V 00
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:
 1= 3.05µm(120µ") Min. Tin
 over 0.76µm(30µ") Nickel
 2= Gold flash plated over
 1.27µm(50µ") Nickel
 3= 0.38µm(15µ") Gold plated
 over 1.27µm(50µ") Nickel
 4= 0.76µm(30µ") Gold plated
 over 1.27µm(50µ") Nickel
- ⑤ Tail Style: V= Straight
- ⑥ Option: 00= Standard

Tin-Lead Process
 RoHS Compliant

4	3	2	1	Jim	3/13/06'	ECN06083/ECR06013-1	APPROVED BY: Alex	DATE: 03/20-06'	UNIT: mm / inch	TITLE: 2.54MM(.100") STRAIGHT DIP HEADER	MATERIAL:	FINISH:	DRAWING NO. CI8301SD	PART NO. CI83**P*V00	SCALE 3 / 1	SHEET 1 OF 1	 瀚荃股份有限公司 CviLux Corporation			
																		DRAWN BY: Jim	03/13-06'	TOLERANCE UNLESS OTHERWISE SPECIFIED
																		ENGINEER: Eisley	03/20-06'	.X ± 0.30/.012 X: ± 1'
																		CHECKED BY: David	03/20-06'	.XX ± 0.20/.008 .X: ±
SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE:															

