




Material:

- △ * Insulation: Nylon 6T UL 94V-0
- * Contact: Phosphor Bronze

Ordering Code:

$\frac{CB33}{①}$ $\frac{**}{②}$ $\frac{2}{③}$ $\frac{R}{④}$ $\frac{1}{⑤}$ $\frac{00}{⑥}$

- ① Series No.
- ② NO. of Circuits:
2= Gold flash plated over 1.27μm(50μ") Nickel
- ③ Plating code:
- ④ Tail Style: R= Bottom entry
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard

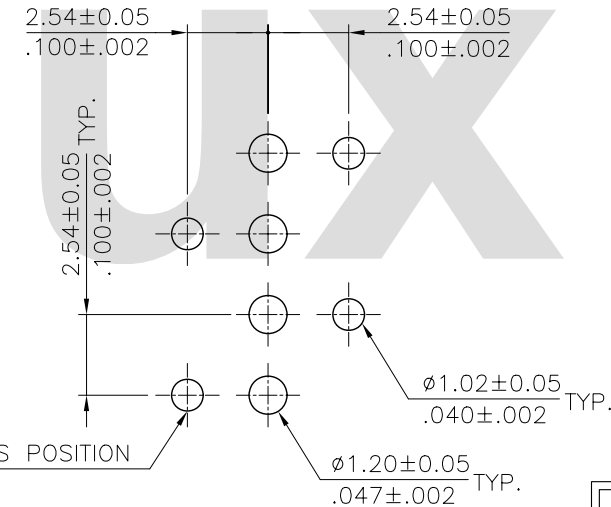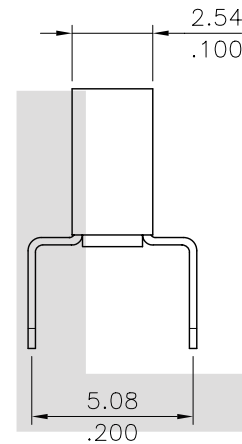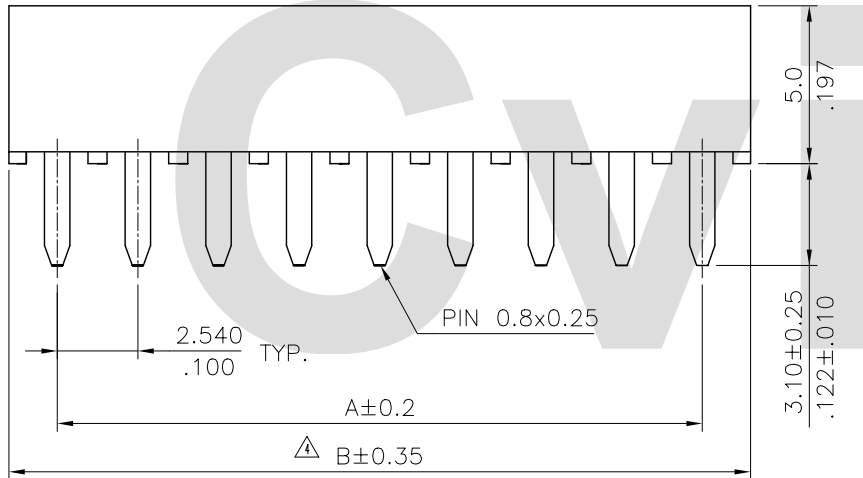

Recommended P.C. Board Layout

$A = 2.54 * \text{No. of Spaces}$
 $\triangle\triangle B = A + 3.14$
 * Available in 2 through 40 circuits

Lead Free Process

RoHS Compliant

△5	Karen	10/15-08'	ECR08083-0/ECN08516			DATE	UNIT: mm / inch	TITLE: 2.54MM(.100")	瀚荃股份有限公司 CviLux Corporation	
△4	Karen	9/19/08'	ECR08078-0/ECN08459		DRAWN BY: Karen	10/23-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	SINGLE ROW BOTTOM ENTRY CONNECTOR		
△3	Sandy	12/19/05'	ECN05440		ENGINEER: Eisley	10/23-08'	.X ± 0.30 / .012 .X' ± 1"	MATERIAL:		
△2	Sandy	11/28/05'	ECR05110-0/ECN05383		CHECKED BY: David	10/23-08'	.XX ± 0.20 / .008 .X' ±	FINISH:	DRAWING NO. CB3301SG	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	10/23-08'	.XXX ± 0.10 / .004 .XX' ±		PART NO. CB33**2R100	
								SCALE	4 / 1	SHEET 1 OF 1