


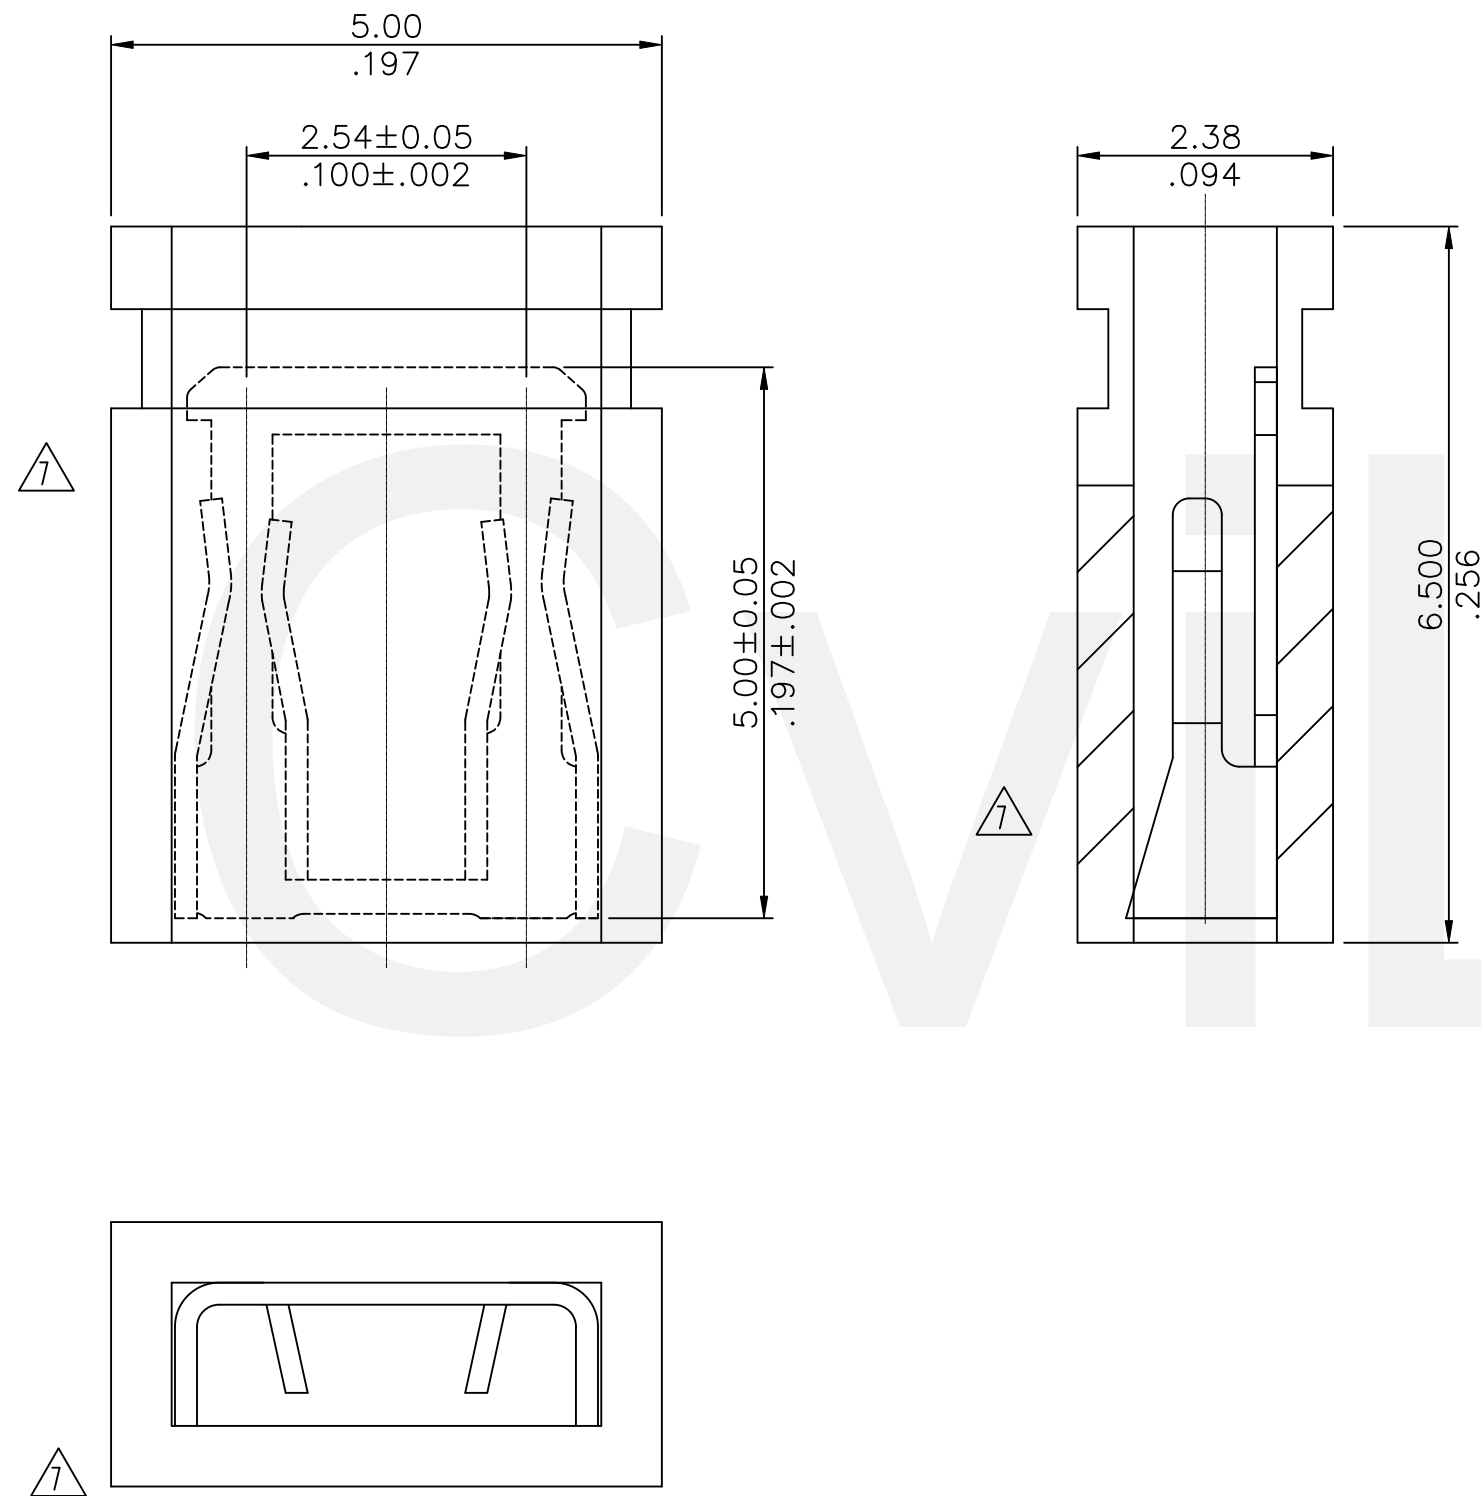

Material:

* Insulation: PBT, UL 94V-0

△6 * Contact: Brass

Ordering Code:

CS0163 2 A 1 00
① ② ③ ④ ⑤

- ① Series No.
② Plating option:
1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel
2= Gold flash plated over
1.27μm(50μ") Nickel
③ Contact type:
A= Closed ead
④ Color code:
1= Black, 2= Brown
3= Red, 7= Blue
⑤ Option:
00= Standard

RoHS Compliant

△7	Karen	11/26-24'	ECNT124326/ECRD124055		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") CLOSED TOP SHUNT	 瀚荃股份有限公司 CviLux Corporation			
△6	Karen	9/03-15'	ECNT115201/ECRT115071	DRAWN BY:	Karen	11/26-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△5	Sun	7/10-14'	ECRB114040/ECNT114127	ENGINEER:	Sun	11/26-24'	.X ± 0.25 / .010 X' ± 1'	DRAWING NO. CS0105SH PART NO. CS0163*A*00			
△4	Enya	5/8-13'	ECR13036-0/ECN13103-0	CHECKED BY:	Eisley	11/26-24'	.XX ± 0.20 / .008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/26-24'	.XXX ± 0.10 / .004 .XX' ±	SCALE 10 / 1 SHEET 1 OF 1			

