

Notes:

* Material:

Insulator: High temperature plastic
UL 94V-0 Color Black
Square Pin: Brass

Ordering Code:

CH51 ** * V 1 ** -NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Contact: 06 to 100
X1=100

③ Plating code:

2=Gold Flash plated over
1.27μm(50u") Nickel

3=0.38μm(15u") Gold plated
over 1.27μm(50u") Nickel

4=0.76μm(30u") Gold plated
over 1.27μm(50u") Nickel

④ Tail & Mounting Style:

V=Straight DIP Type

⑤ Insulator Color:





1= Color Black

⑥ Option Code:

See Table PDF. File No. CH5101T

⑦ -NH= For Lead Free Wave Flow
Processes and Halogen-Free

Recommended P.C. Board Layout

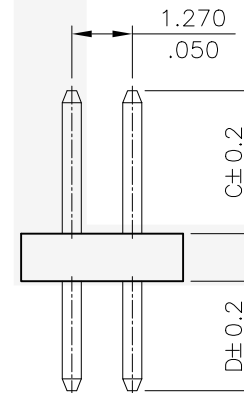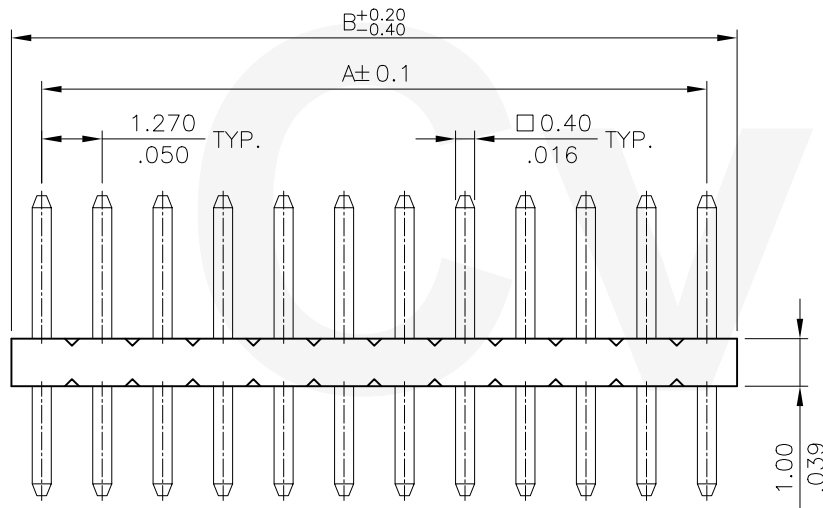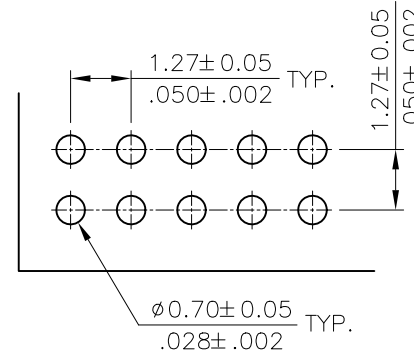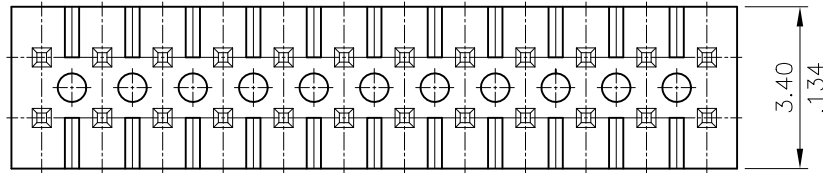

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.27

* Available in 6 through 100 Circuits

Halogen-Free

Lead Free Process

RoHS compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") DUAL ROW BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation		
3					DRAWN BY: Sun	7/12-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2					ENGINEER: Sun	7/12-17'	.X ± 0.25/.010 X' ± 1"	DRAWING NO. CH5146SA PART NO. CH51***V1**-NH		
1					CHECKED BY: Eisley	7/14-17'	.XX ± 0.15/.006 X' ±			
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	7/14-17'	.XXX ± 0.08/.003 XX' ±	FINISH:	SCALE 6 / 1	SHEET 1 OF 1

