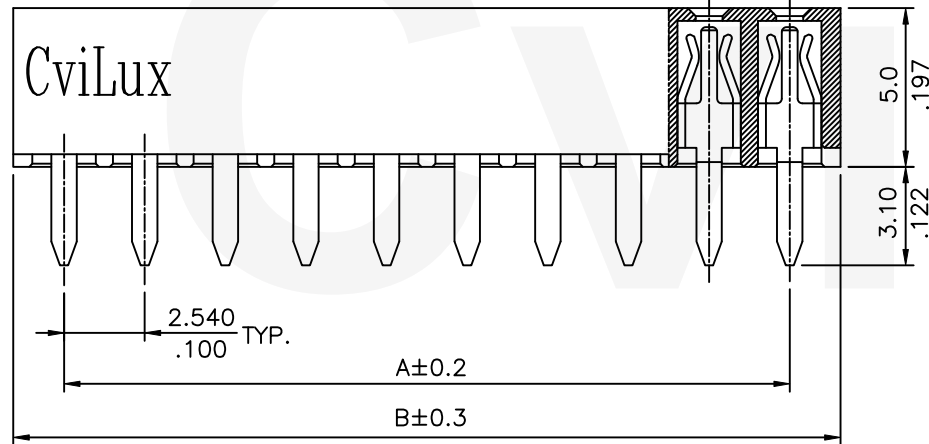


Material:
 * Insulation: Nylon 6T UL 94V-0
 ,Color Black
 * Contact: Phosphor Bronze

Ordering Code:

CB83 ** 2 R 1 00
 ① ② ③ ④ ⑤ ⑥

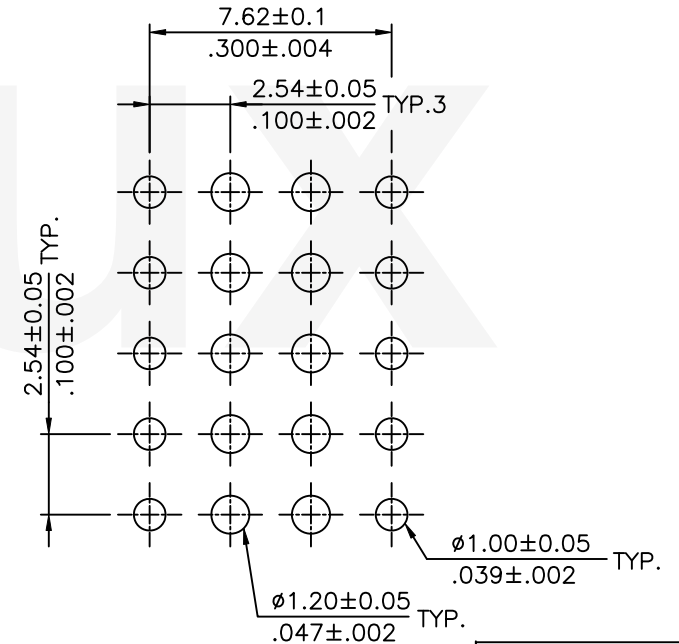
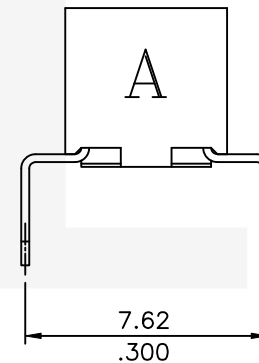
- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:
 2= Gold flash plated over
 1.27 μ m(50 μ "") Nickel
 9= 0.13 μ m(5 μ "") Gold plated over
 1.27 μ m(50 μ "") Nickel
- ④ Tail Style: R= Dual Entry
- ⑤ Color: 1= Black
- ⑥ Other options: 00= Standard



A = 2.54 * No. of Spaces



B = A + 3.20

△* Available in 4 through 40 circuits



Recommended P.C. Board Layout

RoHS Compliant

5	Sun	7/30-19'	ECRB119044/ECNT119166	 2019.08.08 ISSUED		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") DUAL ROW DUAL ENTRY CONNECTOR	 瀚荃股份有限公司 CviLux Corporation	
4	Sandy	5/19-08'	ECN08215/ECR08045-1		DRAWN BY: Sun	7/30-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		DRAWING NO. CB8301SH
3	Bill	01/16/08'	ECN08026		ENGINEER: Sun	7/30-19'	.X ± 0.30 / .012 X' ± 1"	FINISH:		PART NO. CB83***R100
2	Sandy	11/28/05'	ECN05383/ECR05110-0		CHECKED BY: Eisley	8/02-19'	.XX ± 0.20 / .008 X' ±		SCALE 4 / 1	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	8/02-19'	.XXX ± 0.10 / .004 XX ±		SHEET 1 OF 1	