


Material:

* Insulation: Glass filled polyester UL 94V-0

* Pin:

Outer sleeve: Brass, machined

Inner 4 finger contact: Beryllium Copper, heat treated

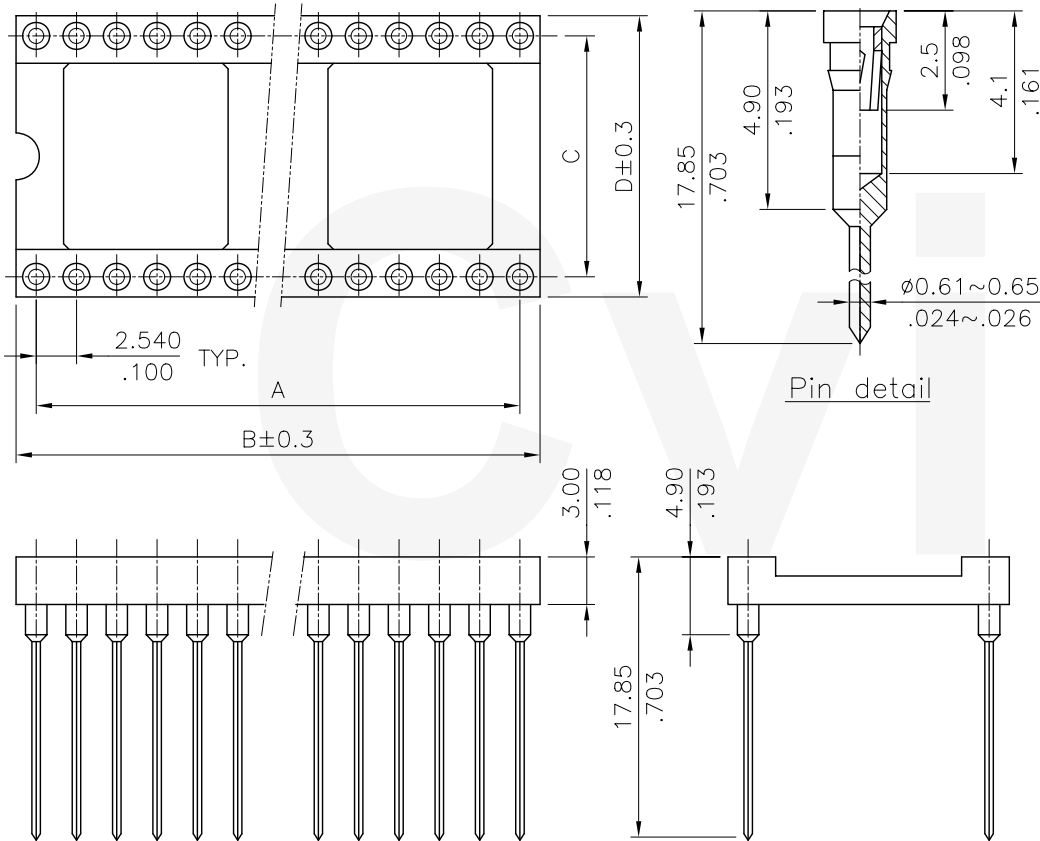


Circuits	CviLux P/N	Dimension			
		A	B	C	D
6	CS0806D1000	5.08(.200)	7.62(.300)	7.62(.300)	10.04(.395)
8	CS0808D1000	7.62(.300)	10.16(.400)	7.62(.300)	10.04(.395)
10	CS0810D1000	10.16(.400)	12.70(.500)	7.62(.300)	10.04(.395)
14	CS0814D1000	15.24(.600)	17.78(.700)	7.62(.300)	10.04(.395)
16	CS0816D1000	17.78(.700)	20.32(.800)	7.62(.300)	10.04(.395)
18	CS0818D1000	20.32(.800)	22.86(.900)	7.62(.300)	10.04(.395)
20	CS0820D1000	22.86(.900)	25.40(1.000)	7.62(.300)	10.04(.395)
	CS0820D1A00			15.24(.600)	17.72(.698)
22	CS0822D1000	25.40(1.000)	27.94(1.100)	7.62(.300)	10.04(.395)
24	CS0824D1000	27.94(1.100)	30.48(1.200)	7.62(.300)	10.04(.395)
	CS0824D1A00			15.24(.600)	17.72(.698)
28	CS0828D1000	33.02(1.300)	35.56(1.400)	7.62(.300)	10.04(.395)
	CS0828D1A00			15.24(.600)	17.72(.698)
32	CS0832D1A00	38.10(1.500)	40.64(1.600)	15.24(.600)	17.72(.698)
40	CS0840D1A00	48.26(1.900)	50.80(2.000)	15.24(.600)	17.72(.698)
42	CS0842D1A00	50.80(2.000)	53.34(2.100)	15.24(.600)	17.72(.698)
48	CS0848D1A00	58.42(2.300)	60.96(2.400)	15.24(.600)	17.72(.698)

Ordering Code

CS08 ** D 1 *00
 ① ② ③ ④ ⑤

- ① Series No.
- ② Circuits:
- ③ Plating Code :
D= Tin plated sleeve with
0.25um(10uin) Gold plated
- ④ Color : 1= Black
- ⑤ Option : Dim. D

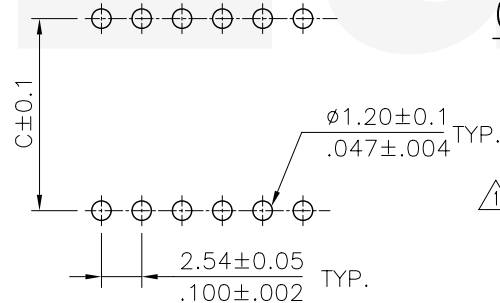

Recommended P.C. Board Layout

RoHS Compliant

4

3

2

1

SYM

NAME

DATE

ECN05262

REVISIONS

APPROVED BY:

Alex

8/9/05'

DRAWN BY:

Eisley

8/9/05'

ENGINEER:

Eisley

8/9/05'

CHECKED BY:

David

8/9/05'

DATE

UNIT: mm / inch

TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X ± 0.30 / .012 X' ± 1"

.XX ± 0.20 / .008 .X' ±

.XXX ± 0.10 / .004 .XX' ±

TITLE: 2.54MM(.100")
WORE WRAP DIP SOCKET

MATERIAL:

FINISH:



瀚荃股份有限公司
CviLux Corporation

DRAWING NO.

CS0801SF

PART NO.

CS08**D1*00

SCALE

2 / 1

SHEET

1 OF 1

