

Material:




- * Insulation: Nylon 66 , Color Nature
- * Contact: Brass

Ordering Code:

CP-01 4 ** 1 * S
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type of Connector:
4= Right angle PCB mount header
- ③ No of Circuits:
- ④ Plating Code: 1= Tin over Nickel
2= Gold flash plated over Nickel
3= 0.38μm(15μ”) Gold plated over 1.27μm(50μ”) Nickel
4= 0.76μm(30μ”) Gold plated over 1.27μm(50μ”) Nickel

- △ ⑤ Variation: 1= UL 94V-2, Without mounting ears
3= UL 94V-0, Without mounting ears
- ⑥ S= Single Row Header

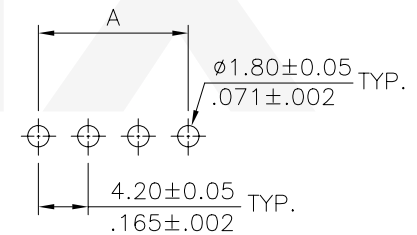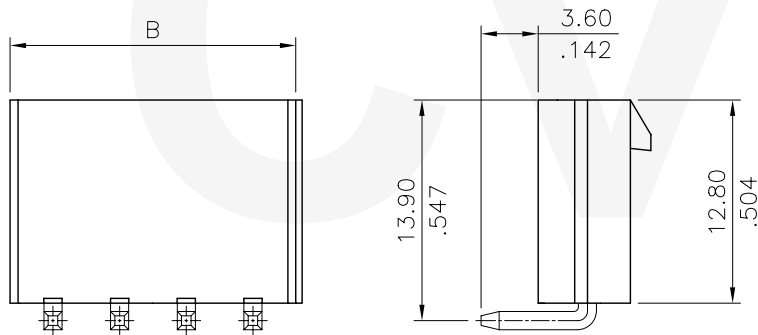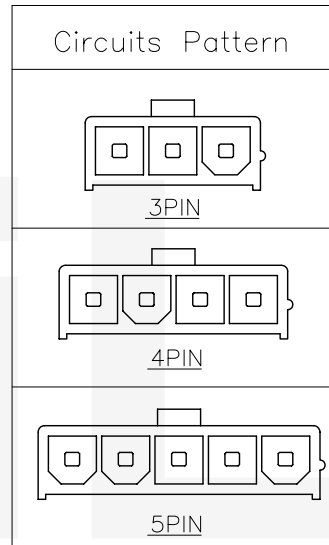

Circuits	Dimension	
	A	B
3	8.4(.331)	13.8(.543)
4	12.6(.496)	18.0(.709)
5	16.8(.661)	22.2(.874)

Recommended P.C. Board Layout

Tin-Lead Process

Halogen-Free

RoHS Compliant



瀚荃股份有限公司
CviLux Corporation

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: RIGHT ANGLE HEADER CP-01 POWER CONNECTOR	DRAWING NO.	CP0157AC	PART NO.	CP-014**11S CP-014**13S
4											
3											
2	Sandy	9/19-08'	ECN08463	ENGINEER:	Eisley	9/19-08'					
1	Hank	10/4 07'	ECN07412	CHECKED BY:	Alex	9/19-08'					
				APPROVED BY:	Alex	9/19-08'					
								SCALE	3 / 1	SHEET	1 OF 1

CVILUX CORP
2008.08.19
ISSUED

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.38/.015	.X' ± r'
.XX ± 0.25/.010	.X' ±
.XXX ± 0.10/.004	.XX' ±

MATERIAL:	
FINISH:	