

Notes:

1. Material & Finish :

Insulation: Nylon 6, Color Nature

Contact: Brass

2. Circuit Pattern Schedule:

See Drawing No: CP0111S*

① 3. Glow wire requirement:



IEC 60695-2-12 GWFI 960°C@0.38mm

& 930°C@0.75mm

& 960°C@1.50mm

& 960°C@3.00mm

IEC 60695-2-11 GWEPT 750°C ≤2S

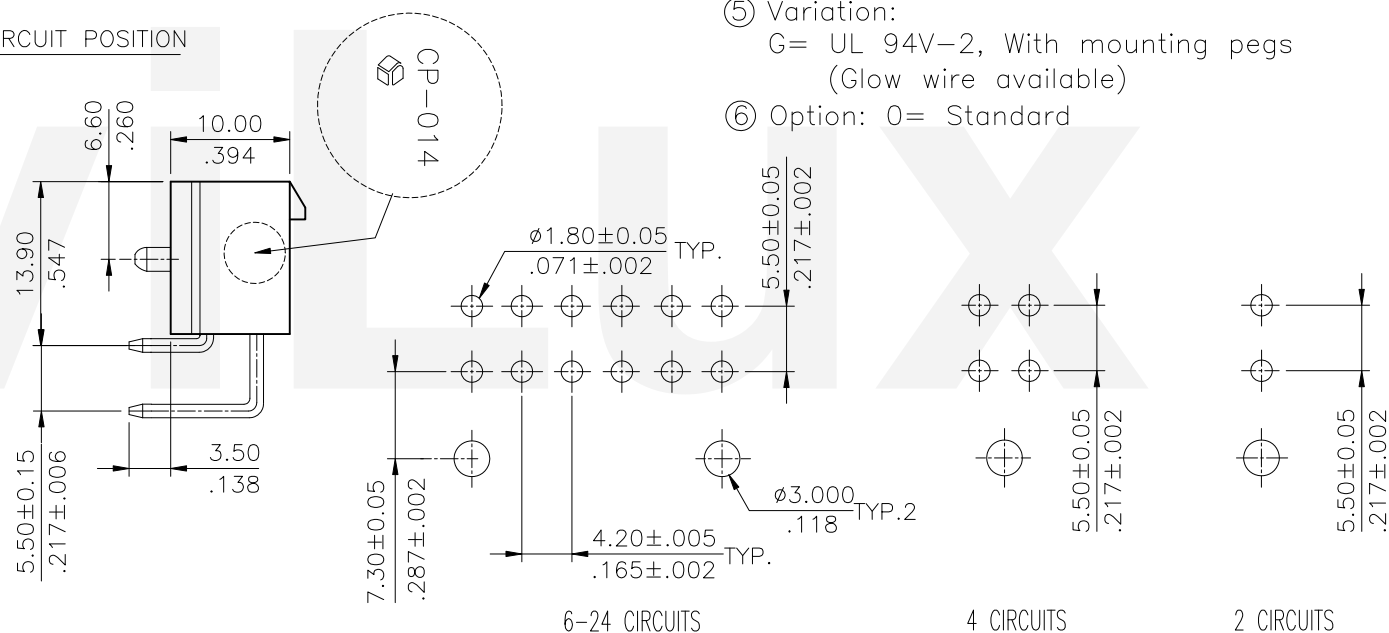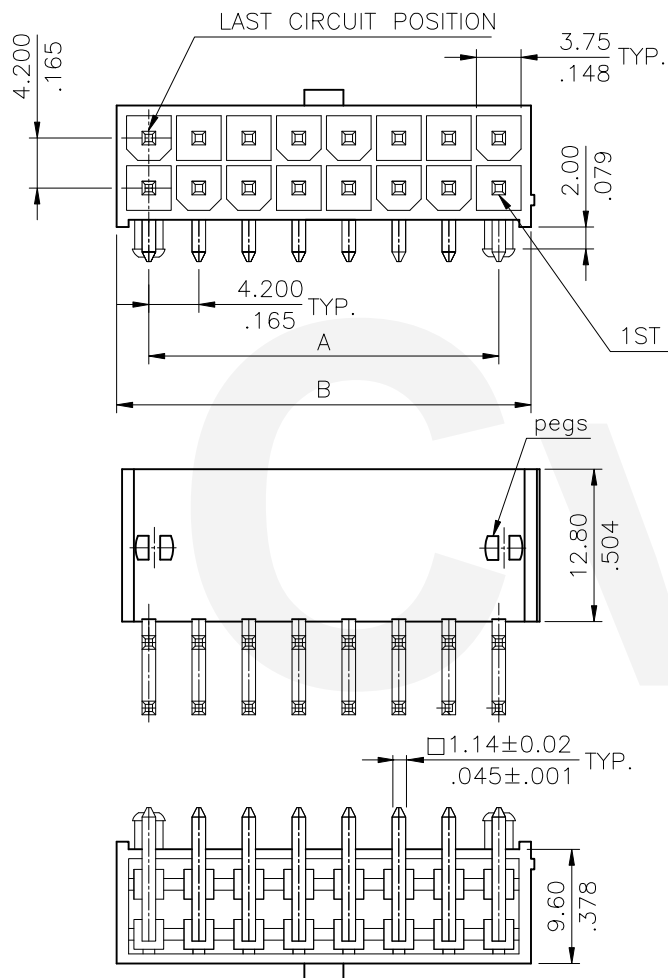

Ordering Code:

CP-01 4 ** * G 0
① ② ③ ④ ⑤ ⑥

① Series No.

② Type of Connector:

4= Right angle PCB mount header

③ No of Circuits:

④ Plating Code:

1= Tin over Nickel

2= Gold flash plated over Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Variation:

G= UL 94V-2, With mounting pegs
(Glow wire available)

⑥ Option: 0= Standard

Recommended P.C. Board layout

Tin-Lead Process

RoHS compliant

④					DATE	UNIT: mm / inch	TITLE: RIGHT ANGLE HEADER CP-01 POWER CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
③					DRAWN BY: Kenny	8/26-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②					ENGINEER: Sun	9/1-20'	.X ± 0.38/.015 X' ± r	DRAWING NO. CP0153AB PART NO. CP-014***GO			
①	Kenny	8/26-20'	ECNT120227		CHECKED BY: Eisley	9/4-20'	.XX ± 0.25/.010 X' ±				
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	9/4-20'	.XXX ± 0.10/.004 XX' ±	SCALE 2 / 1 SHEET 1 OF 1			

CVILUX
2020.09.10
ISSUED