

NOTE:

Material :




- * Base : High Temperature plastic UL 94V-0
Color Black
- * Contact : Copper alloy
- * Fixed tab : Matte Tin plated over Nickel

ORDERING CODE

CI43 ** M * H * 0 -NH

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Contact: 02 to 30
- ③ M= SMT Type Header
- ④ Plating :
1= 3.05μm(120μ") Min. Matte Tin
over 1.27μm(50μ") Nickel
2= Gold flash plated over 1.27um(50u") Nickel
- ⑤ Type : H= Side entry
- ⑥ Packing option:
R= Tape & Reel Packing
- ⑦ Other option:
0= Standard
- ⑧ -NH= For Lead Free IR Processes and Halogen-Free

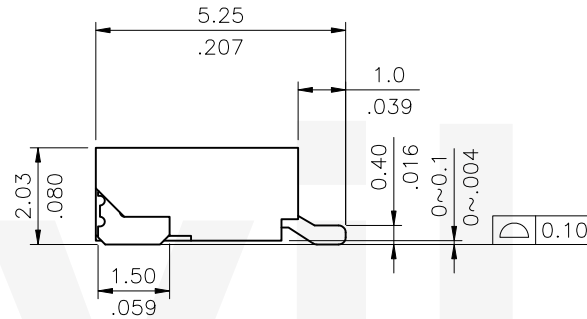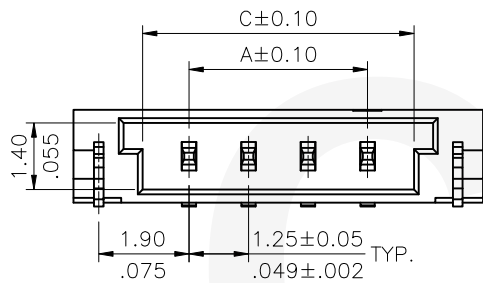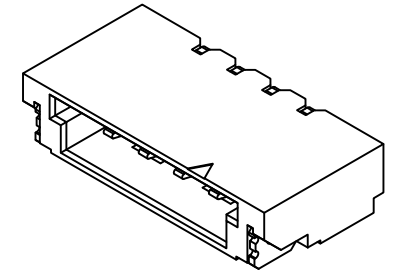


DIM. A = 1.25 x NO. OF SPACES

DIM. B = DIM. A + 4.85


DIM. C = DIM. A + 1.95

DIM. D = DIM. A - 1.25

* AVAILABLE IN 2 THROUGH 30

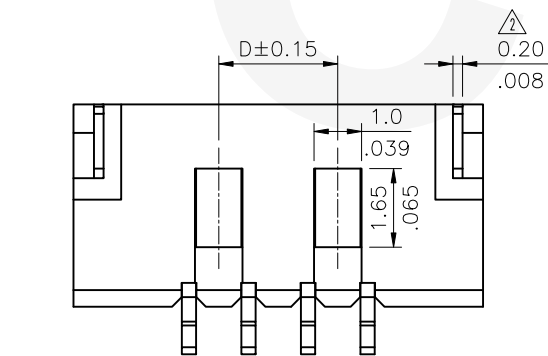


FOR 4P~30P

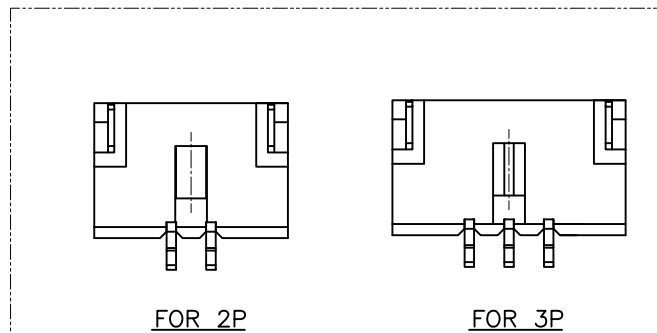

FOR 2P

FOR 3P

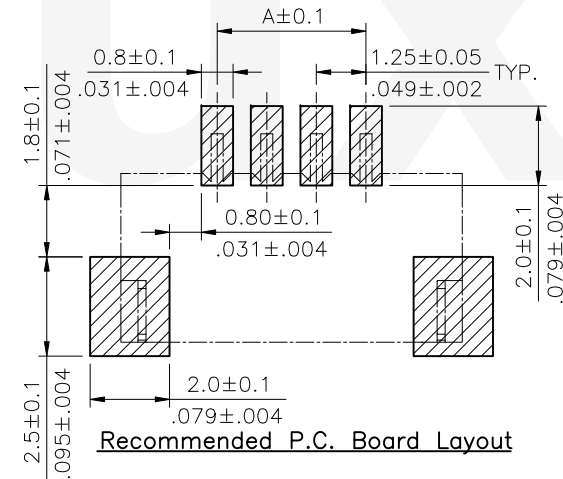


Halogen-Free

Lead Free Process



RoHS Compliant

④				 2019.09.05 ISSUED		DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE	 瀚荃股份有限公司 CviLux Corporation
③			DRAWN BY: Sun		9/02-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:	
②	Sun	9/02-19'	ECNT119236		ENGINEER: Sun	9/02-19'	.X ± 0.30/.012 X' ± 1'		
①	Enya	8/30-12'	ECR12043-2/ECN12209-0		CHECKED BY: Eisley	9/04-19'	.XX ± 0.20/.008 X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/04-19'	.XXX ± 0.10/.004 X' ±		DRAWING NO. CI4301SC	PART NO. CI43**M*H*0-NH
								SCALE 6 / 1	SHEET 1 OF 2

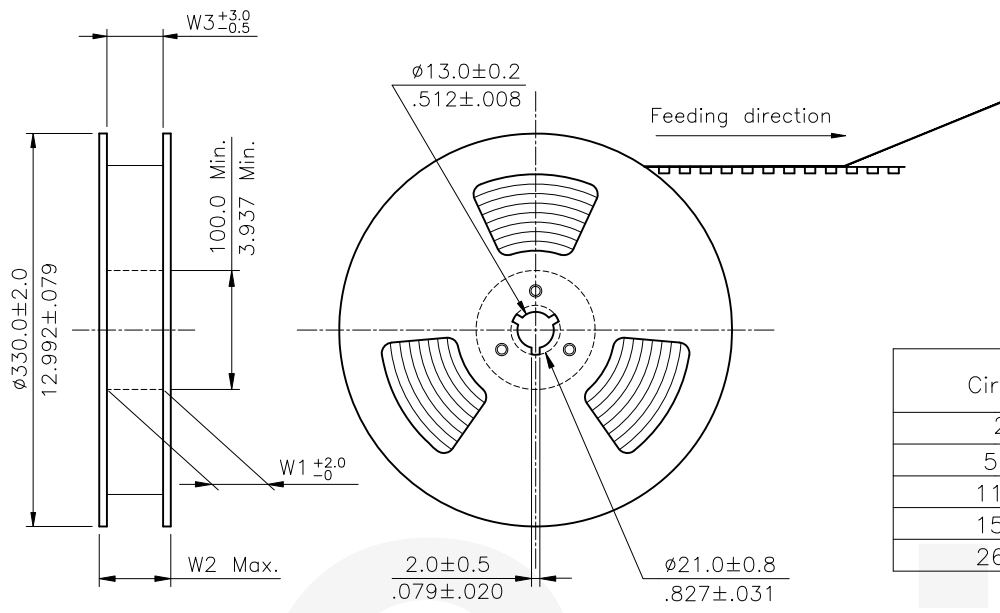


- NOTES:
1. 10 sprocket hole pitch cumulative tolerance ± 0.20
 2. Carrier camber is within 1 mm in 250 mm.
 3. Material : Black, Polystyrene alloy
 4. All dimensions meet EIA-481-C requirements.
 5. Thickness : 0.30 ± 0.05 mm.
 6. Packing length per 22" Reel : 92.4 Meters.
 7. Component load per 13" Reel : 2500 pcs.

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2~4	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
5~10	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
11~14	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
15~25	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
26~30	56.0(2.204)	52.40(2.603)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

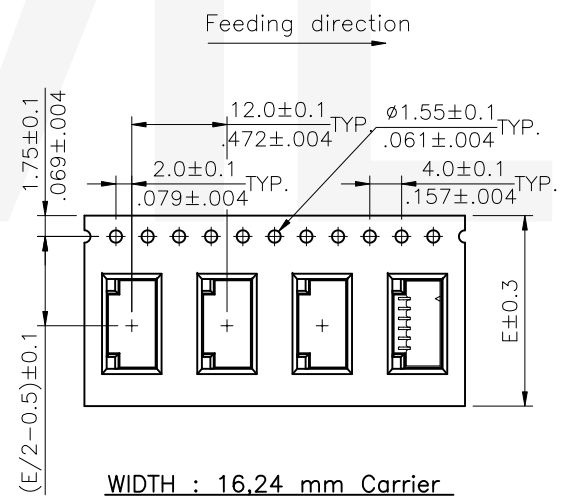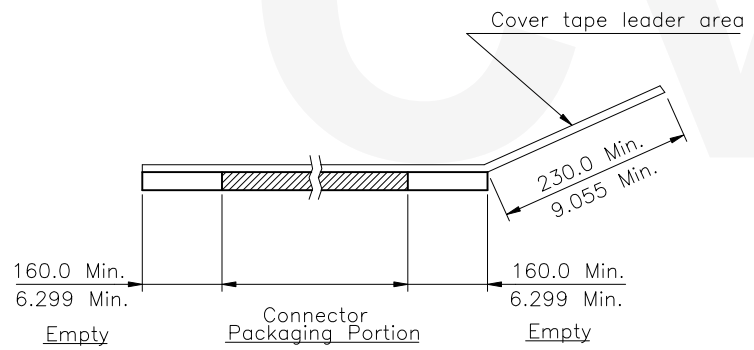

WIDTH : 16.24 mm Carrier

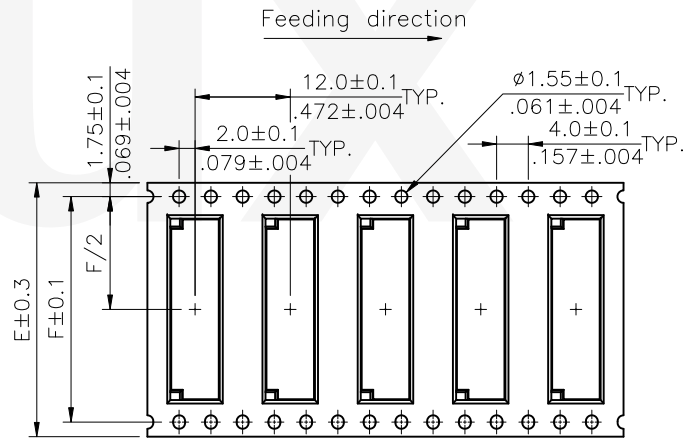

WIDTH : 32.44,56 mm Carrier

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE	瀚荃股份有限公司 CviLux Corporation	
3						DRAWN BY: Sun	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2	Sun	9/02-19'	ECNT119236			ENGINEER: Sun	.X ±	.X' ± 1'	DRAWING NO. CI4301SC	
1	Enya	8/30-12'	ECR12043-2/ECN12209-0		CHECKED BY: Eisley	9/04-19'	.XX ±	.X ±	FINISH:	PART NO. CI43**M*H*0-NH
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	9/04-19'	.XXX ±	.XX ±	SCALE	SHEET 2 OF 2