





Material :

- \* Insulation:  
Nylon66 30% G.F. UL 94V-0(Nature)
- \* S.Q PIN: Brass

Ordering Code:

CI88 \*\* P \* V 00 -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of contacts
- ③ P= DIP Header
- ④ Plating code:  
1= Tin over Nickel  
2= Gold flash plated over 1.27um(50u") Nickel
- ⑤ Contact Type: V=Straight
- ⑥ Option: 00= Standard
- ⑦ -NH= For Lead Free IR Processes and Halogen-Free

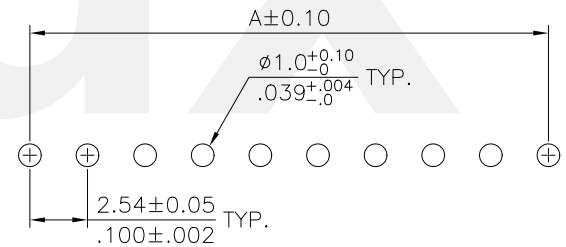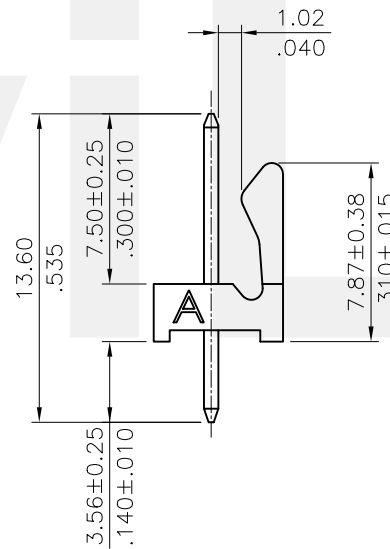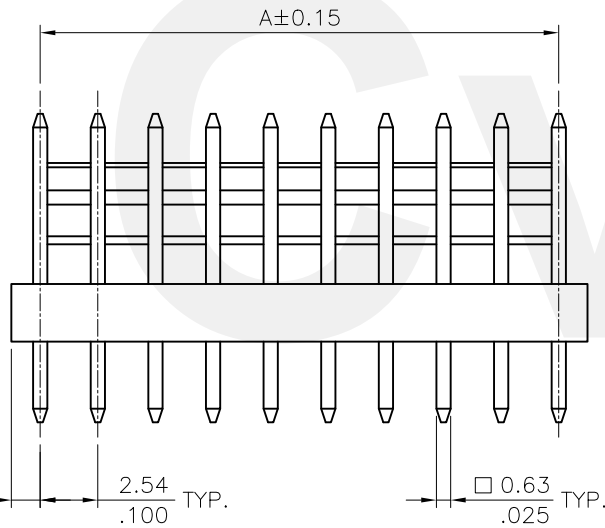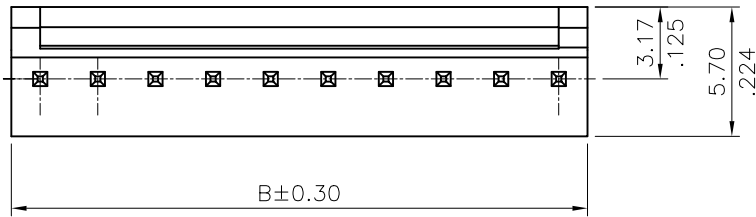

Recommended P.C. Board Layout

DIM.A = 2.54 x (NO. OF CIRCUIT-1)

DIM.B = DIM.A + 2.54

\*Available in 2~28 Circuits

Halogen-Free    Lead Free Process    RoHS Compliant

CVILUX CORP  
 2015.10.08  
 ISSUED

④					DATE	UNIT: mm / inch	TITLE: CI88 Series 2.54mm S/T Header	瀚荃股份有限公司 CviLux Corporation	
③				DRAWN BY: Hank	9/25-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
②				ENGINEER: Eisley	9/30-15'	.X ± 0.30/.012    X' ± 1'	FINISH:		
①				CHECKED BY: Eisley	9/30-15'	.XX ± 0.20/.008    .X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	9/30-15'	.XX ± 0.10/.004    .XX' ±	DRAWING NO. CI8801SA	PART NO. CI88**P*V00-NH	
								SCALE 3 / 1	SHEET 1 OF 1