

Notes:

- \* Insulation: LCP, UL 94V-0
- \* Contact: Phosphor Bronze
- \* For Lead-Free IR Reflow process

Ordering Code:


$\frac{CB03}{\textcircled{1}}$ 
 $\frac{**}{\textcircled{2}}$ 
 $\frac{2}{\textcircled{3}}$ 
 $\frac{S}{\textcircled{4}}$ 
 $\frac{1}{\textcircled{5}}$ 
 $\frac{00}{\textcircled{6}}$ 
 $\frac{-NH}{\textcircled{7}}$

- ① Series No.
- ② NO. of Circuits:
- ③ Plating code:  
2= Gold flash plated over  
1.27 $\mu$ m(50 $\mu$ ”) Nickel
- ④ Tail Style: S= SMT TYPE
- ⑤ Color: 1= Black
- ⑥ Options: 00= Standard
- ⑦ -NH= For Lead Free IR Processes  
and Halogen-Free

A = 1.00 \* No. of Spaces

B = A + 1.50

\* Available in 2 through 50 circuits

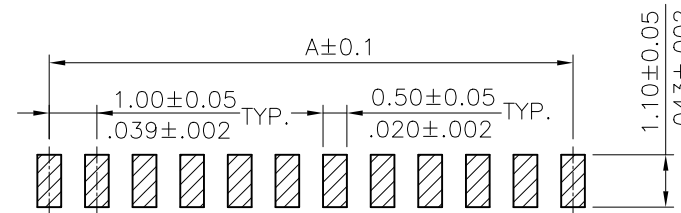

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 1.00MM(.039”) SMT TYPE SINGLE ROW PIN HEADER	 瀚荃股份有限公司 CviLux Corporation	
③			DRAWN BY: Sandy		2/3-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30 / .012    X' ± 1" .XX ± 0.20 / .008    .X' ±	MATERIAL:	DRAWING NO. CB0301SA		PART NO. CB03**2S100-NH
②			ENGINEER: Sun		2/15-16'		MATERIAL:	SCALE 6 / 1		SHEET 1 OF 1
①			CHECKED BY: Eisley		2/16-16'	.XXX ± 0.10 / .004    .XX' ±	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/16-16'					