
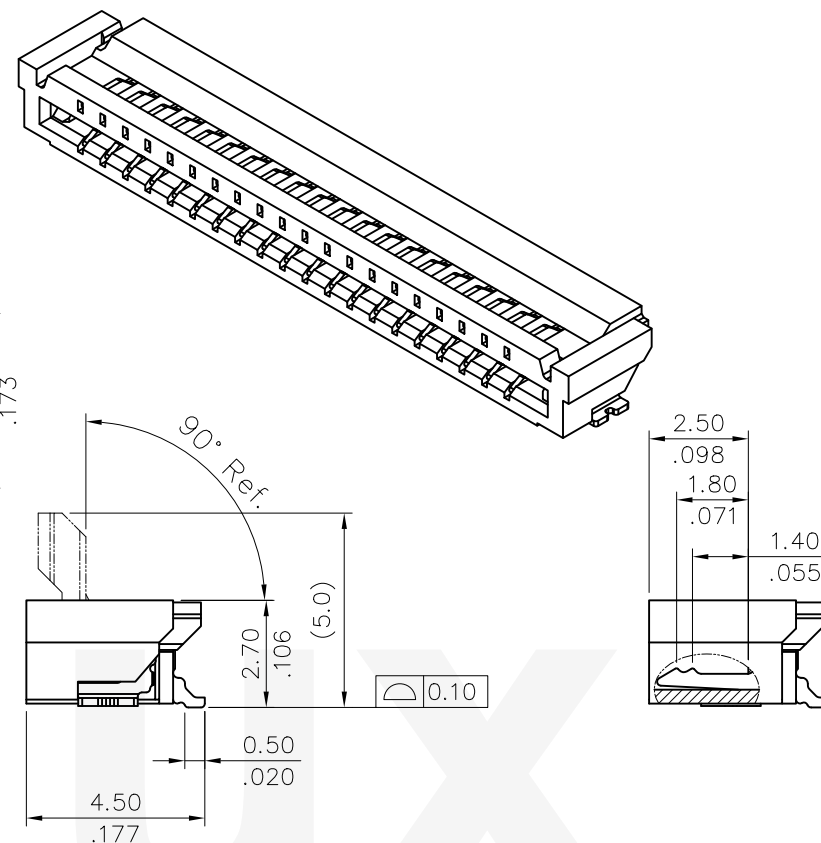


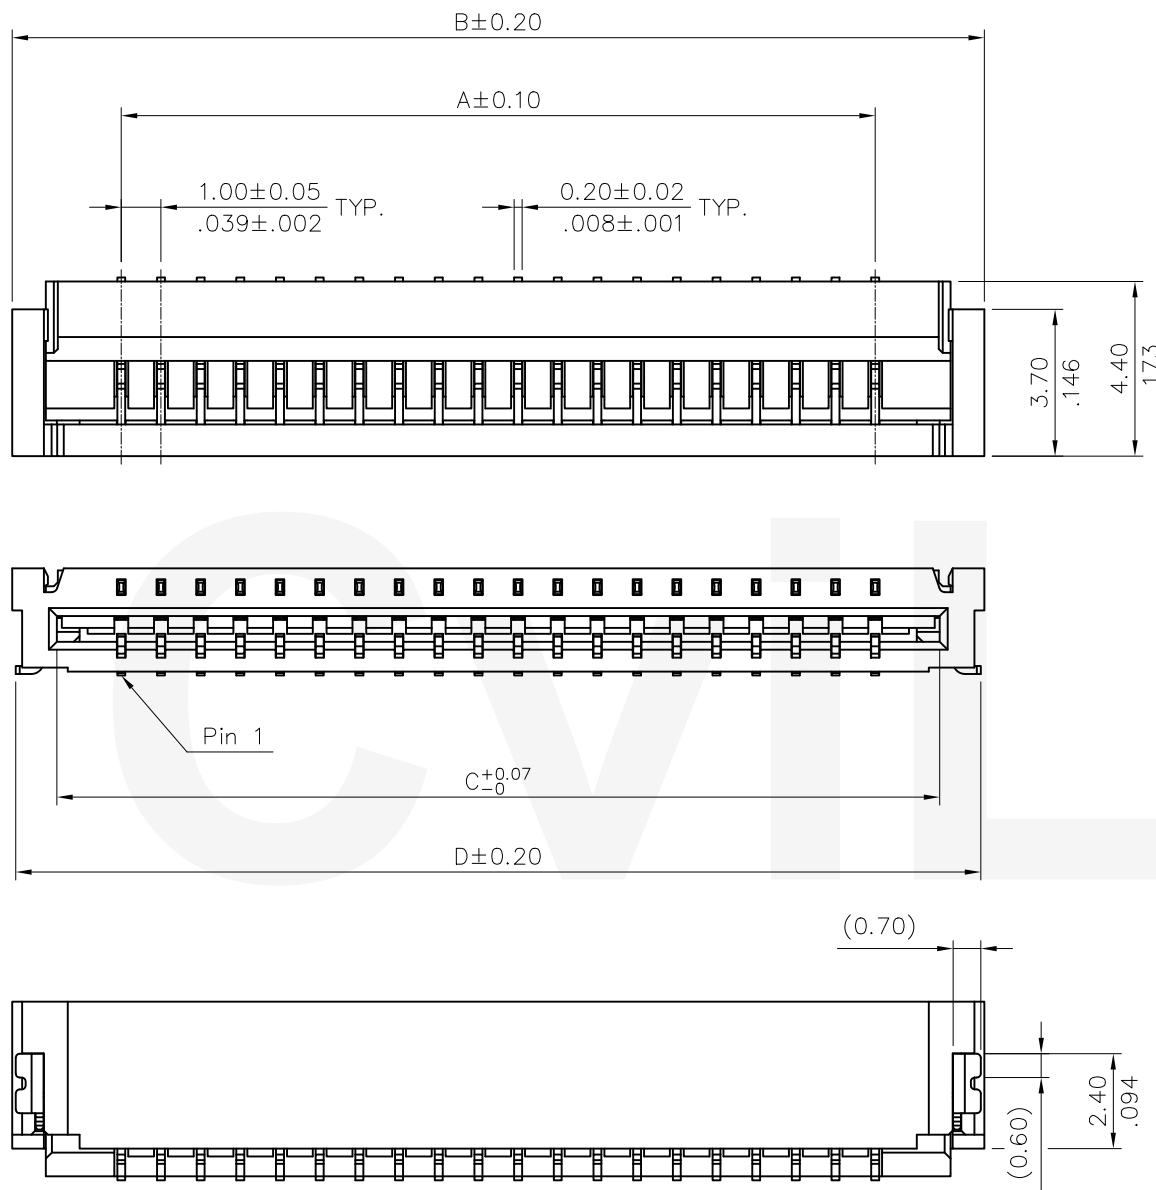

Dim.A = 1.00 x No. of Spaces
 Dim.B = Dim.A + 5.5
 Dim.C = Dim.A + 3.25
 Dim.D = Dim.A + 5.3
 * Available in 04 through 20 circuits


Lead Free Process

Halogen-Free


RoHS compliant

CVILUX CORP
 2016.08.11
 ISSUED

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 瀚荃股份有限公司 CviLux Corporation		
3				DRAWN BY: Clark	8/4-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
2				ENGINEER: Clark	8/4-16'	.X ± 0.25/.010 X' ± .1	FINISH:	DRAWING NO. CF1108SA	PART NO. CF11**1D0*C-10-NH	
1	Clark	08/03-16	ECNT116165	CHECKED BY: David	8/9-16'	.XX ± 0.15/.006 X' ± .1		SCALE 5 / 1	SHEET 1 OF 3	
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	8/9-16'	.XXX ± 0.10/.004 X' ± .1				

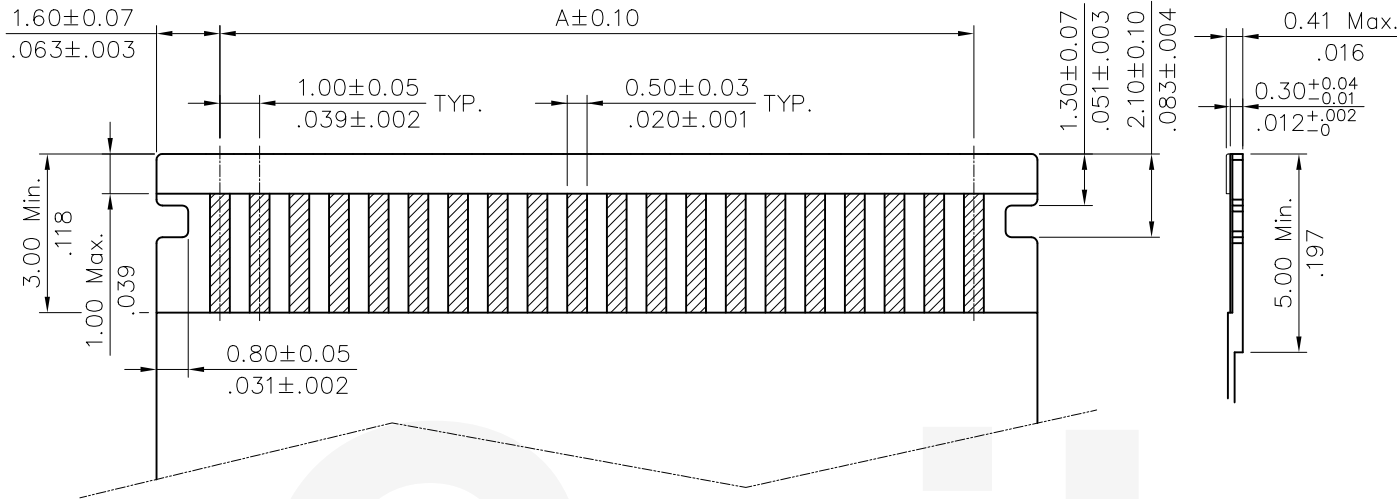

Accommodated FFC/FPC

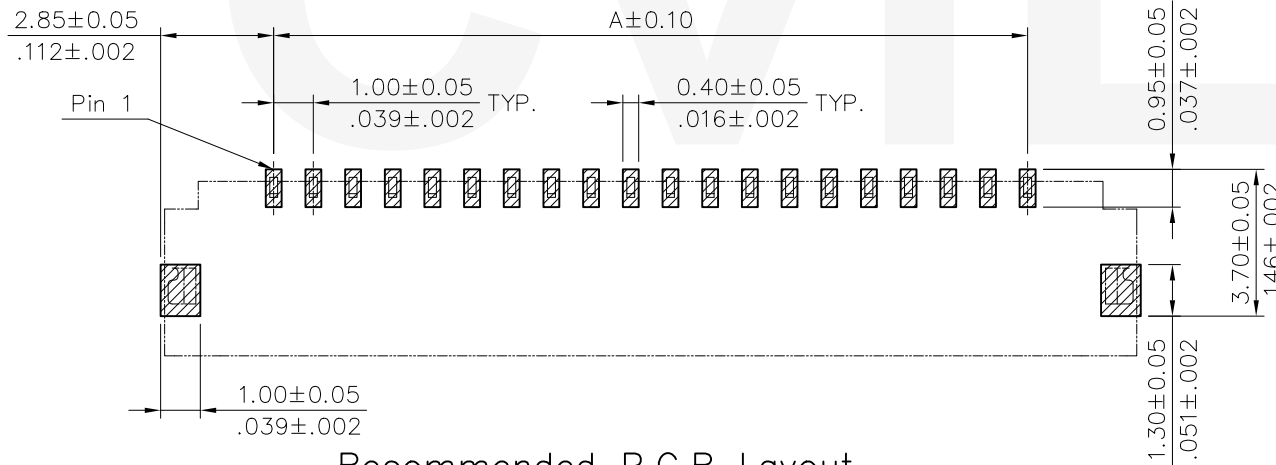

Recommended P.C.B Layout


Material :

- * Body : High temperature plastic UL 94V-0
Color Nature
- * Cover : High temperature plastic UL 94V-0
Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Tin Plated

Ordering Code

CF11 08 1 D 0 * C - 10 - NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② No. of Circuits: 04~20 Pin
- ③ Plating code:
1= Matte Tin plated over Nickel
- ④ Contact style: D= Downside contact
- ⑤ 0= Color Nature
- ⑥ Other option: R= Tape & Reel
T= Tube Packing
- ⑦ C= Type C
- ⑧ 10= Pitch 1.00mm
- ⑨ NH= For Leadfree IR Processes
and Halogen-Free

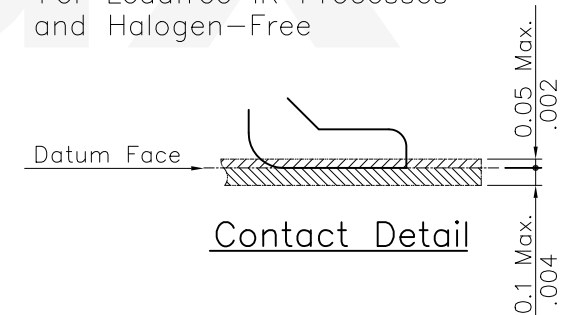

Contact Detail

Lead Free Process

Halogen-Free

RoHS compliant

4				CIVILUX CORP		DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 瀚荃股份有限公司 CviLux Corporation
3				2016.08.11	DRAWN BY: Clark	8/4-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.25/.010 .X' ± ' .XX ± 0.15/.006 .X' ± .XXX ± 0.10/.004 .XX' ±	MATERIAL:	
2				ISSUED	ENGINEER: Clark	8/4-16'		FINISH:	
1	Clark	08/03-16	ECNT116165		CHECKED BY: David	8/9-16'			
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	8/9-16'			DRAWING NO. CF1108SA PART NO. CF11**1D0*C-10-NH SCALE 5 / 1 SHEET 2 OF 3

