
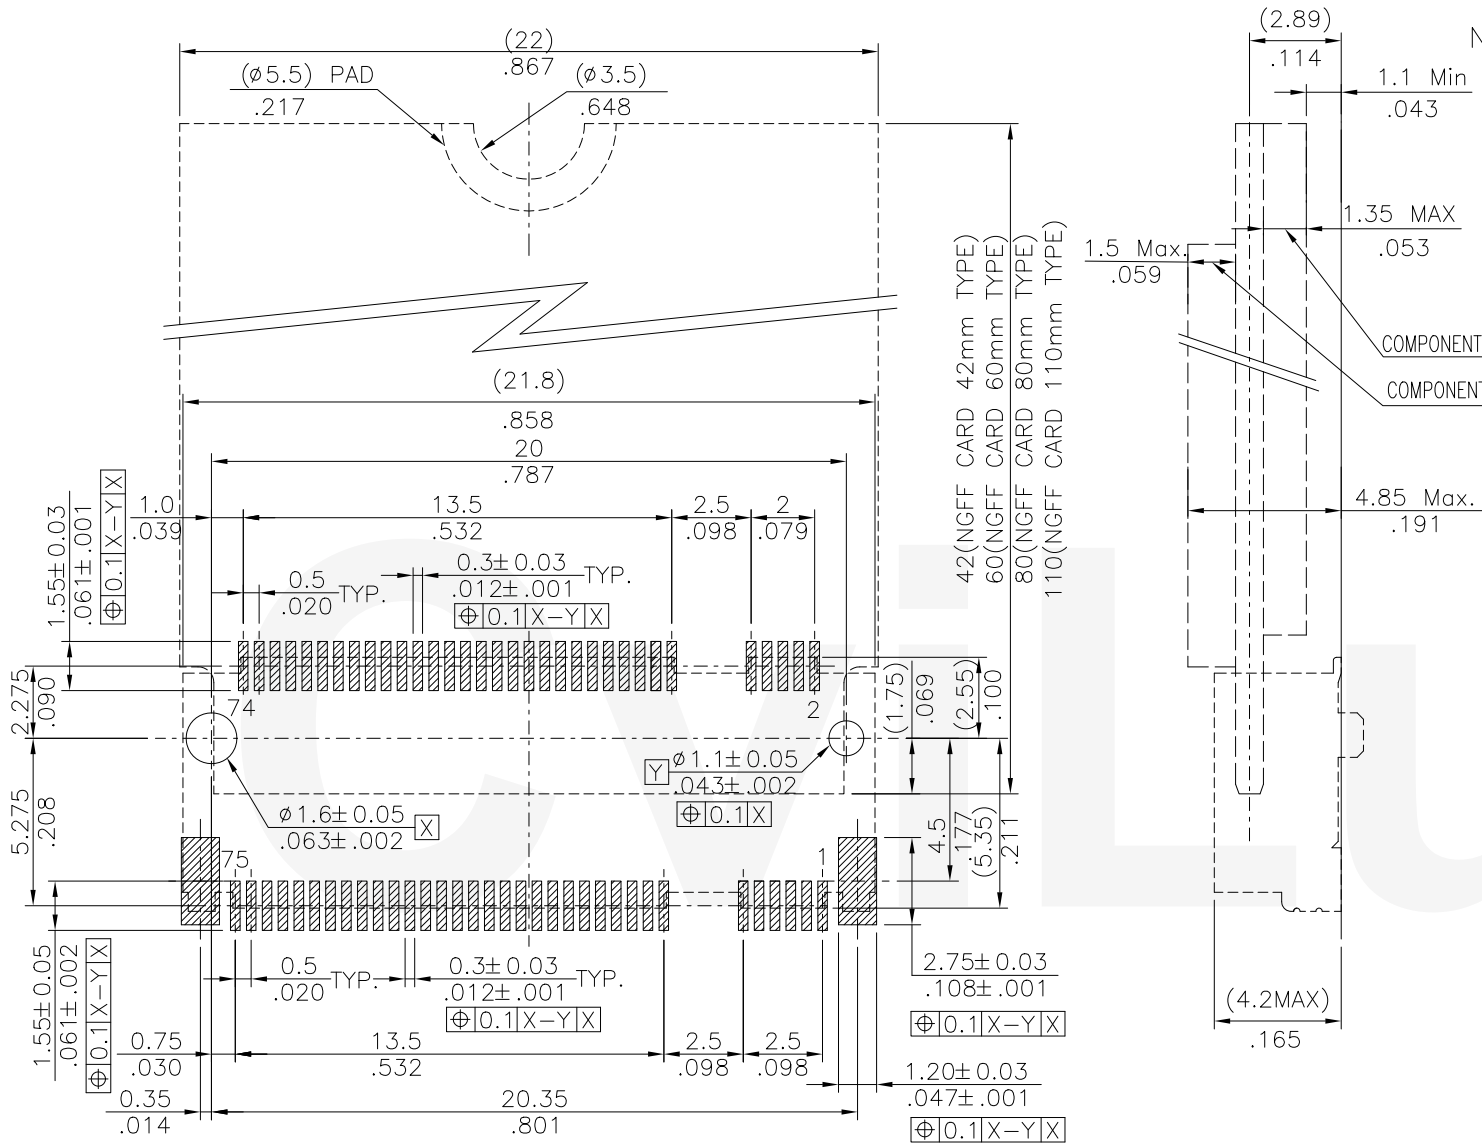


Halogen-Free Lead Free Process RoHS compliant

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
3					DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	M.2 CONNECTOR KEY ID "B"	
2					ENGINEER: Sun	± 0.2 / .008 X: ± 3'	MATERIAL:	DRAWING NO. CS7601SA PART NO. CS76672AB0-RO
1					CHECKED BY: Eisley		FINISH:	SCALE 1 / 1 SHEET 1 OF 4
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley			

CVILUX CORP
2018.01.11
ISSUED



Note:

Material:

- * Insulation: High Temperature Thermo Plastic UL 94V-0
- * Terminal: Copper alloy
- * Solder Peg : Copper alloy
- * For Lead-Free IR Reflow process


COMPONENT HEIGHT(BACK SIDE)

COMPONENT HEIGHT(FRONT SIDE)

Ordering Code:

CS76 67 * A B0 - R0
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits:
- ③ Plating :
2= Gold flash over 50u" Nickel
- ④ Height : A=4.00mm
- ⑤ Key ID: B = Key B
- ⑥ Option: R0=Reel Packing

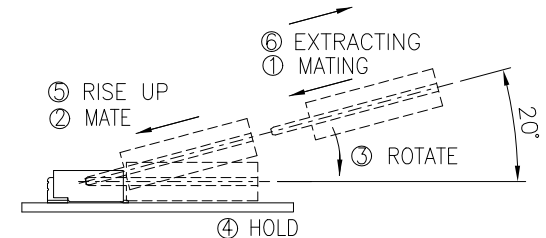


KEY ID "B"
 RECOMMENDED P.C.BOARD LAYOUT


Halogen-Free

Lead Free Process

RoHS compliant

④					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Sandy	TOLERANCE UNLESS OTHERWISE SPECIFIED	M.2 CONNECTOR KEY ID "B"	
②					ENGINEER: Sun	± 0.2 / .008 X: ± 3'	MATERIAL:	
①					CHECKED BY: Eisley		FINISH:	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	1/09-18'		DRAWING NO. CS7601SA
								PART NO. CS76672AB0-R0
								SCALE 1 / 1
								SHEET 2 OF 4

CIVILUX CORP
 2018.01.11
 ISSUED

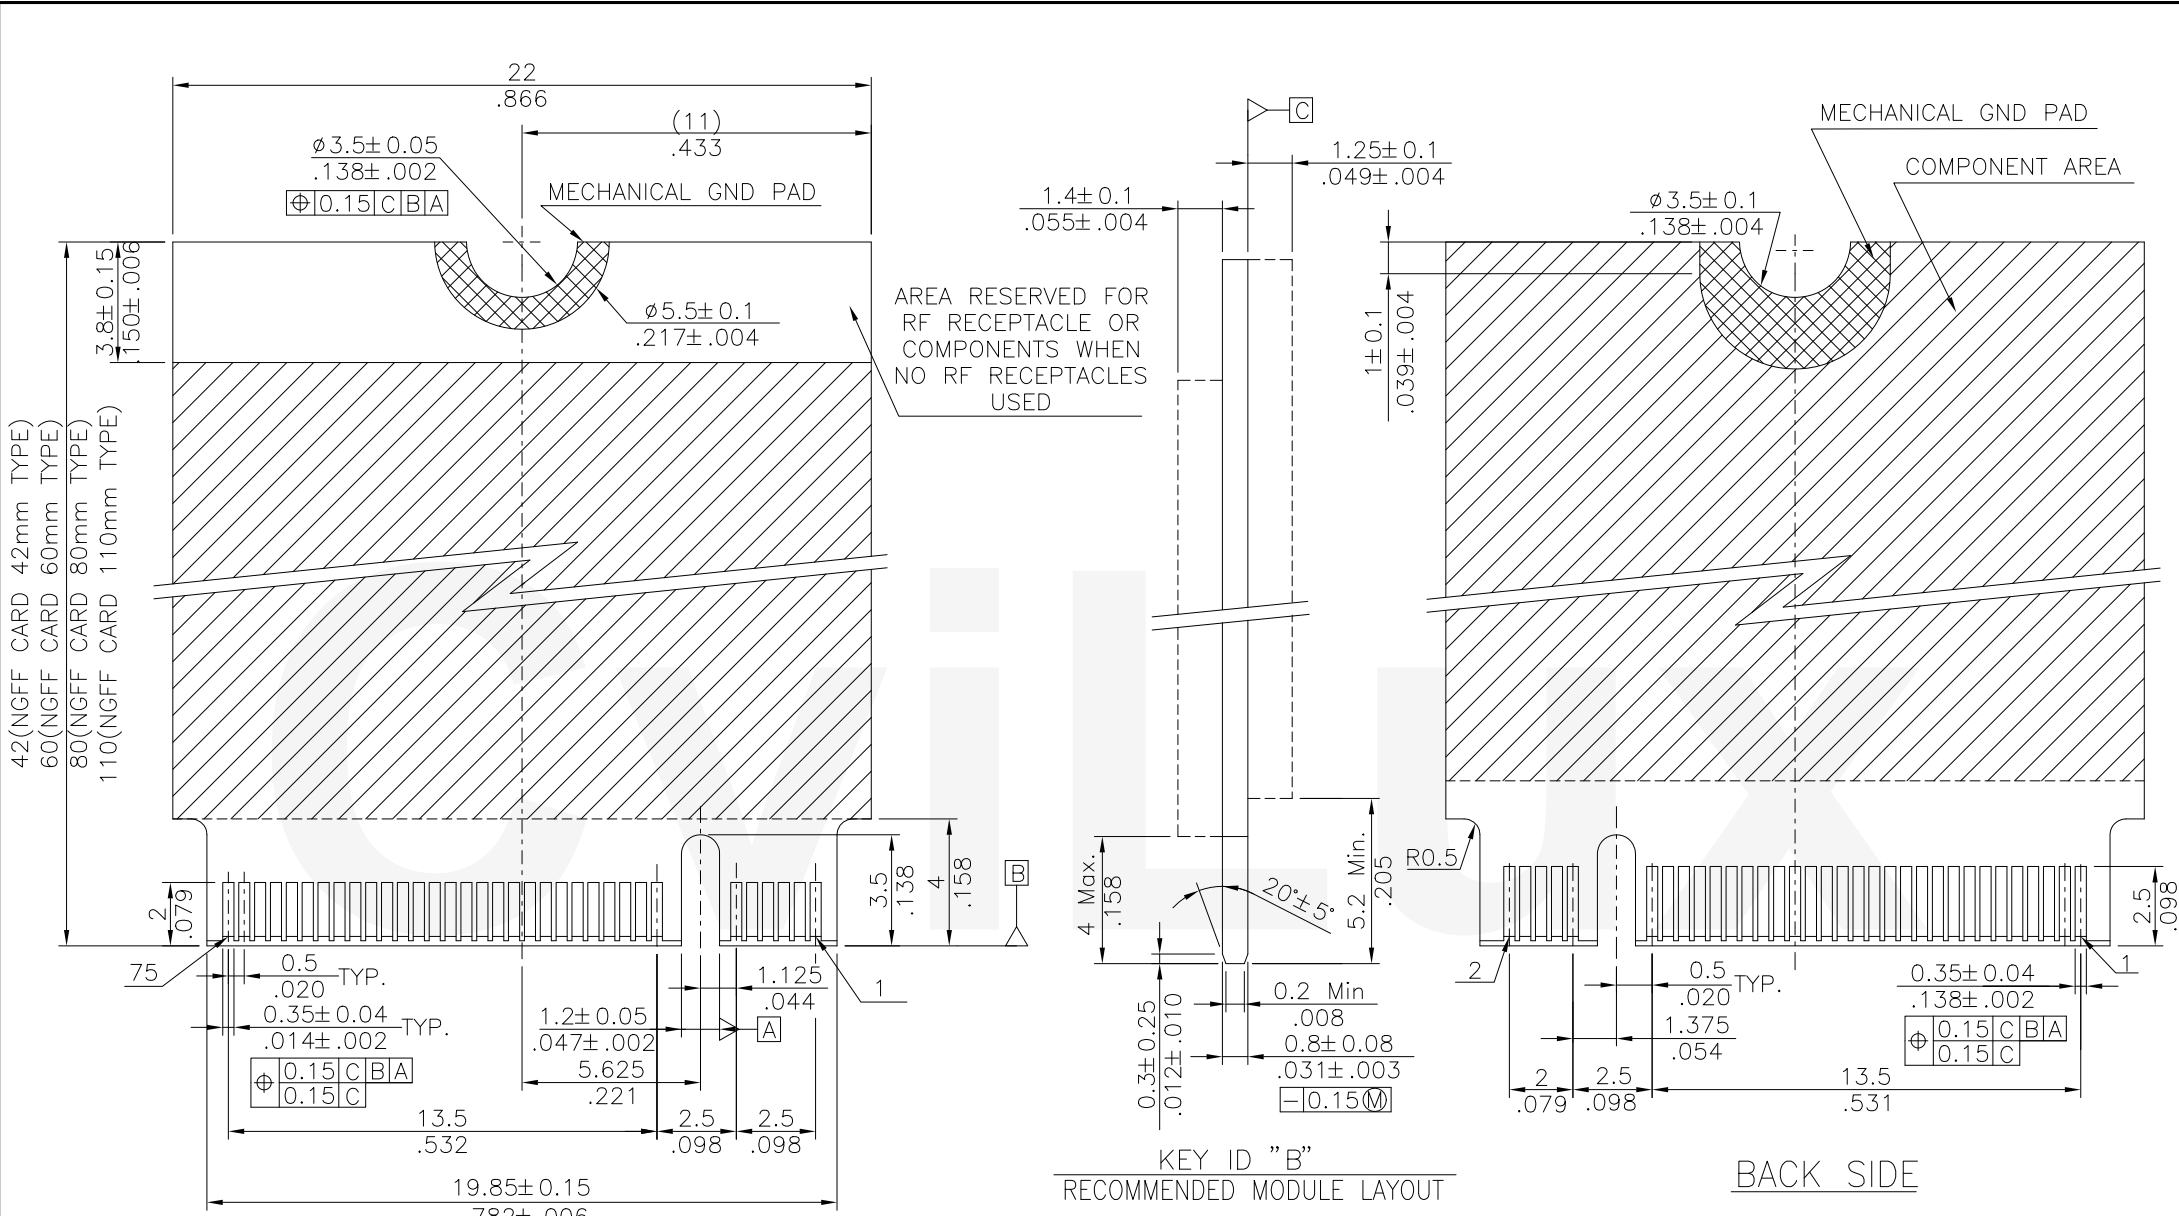


FRONT SIDE

BACK SIDE

KEY ID "B"
RECOMMENDED MODULE LAYOUT


Halogen-Free Lead Free Process RoHS compliant

4				DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
3			DRAWN BY: Sandy	1/05-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	M.2 CONNECTOR KEY ID "B"	
2			ENGINEER: Sun	1/08-18'	± 0.2 / .008 X: ± 3'	MATERIAL:	
1			CHECKED BY: Easley	1/09-18'		FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Easley	1/09-18'	DRAWING NO. CS7601SA	PART NO. CS76672AB0-RO
						SCALE 1 / 1	SHEET 3 OF 4

CVILUX CORP
2018.01.11
ISSUED

NOTES:

- * Reel Material : Hips
- * Carrier Material : Black, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peeling Angle : 165° to 180°
- * General Tolerance : ±0.5 , ±3°
- * Cover Tape Peel Strength : 10.0~130.0gf
- * Quantity : 1000 PCS/Reel

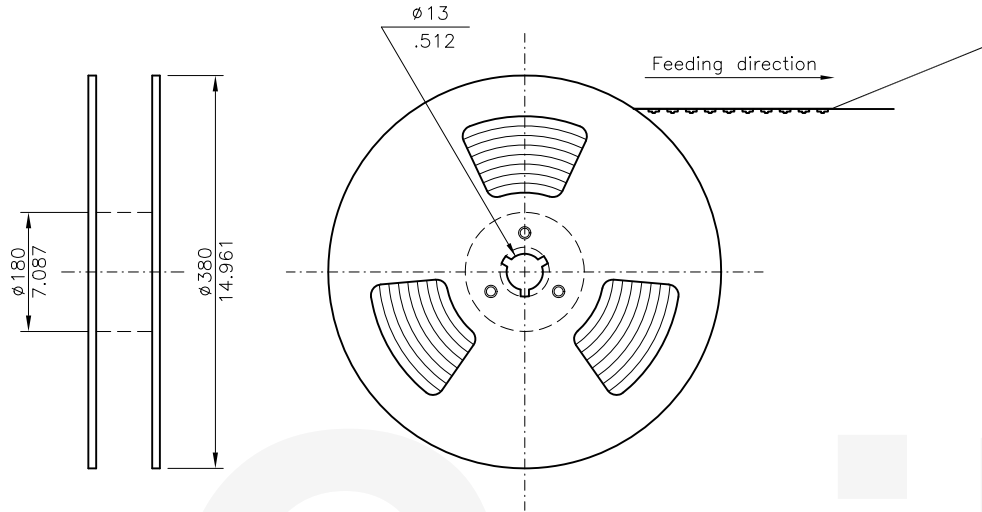


WINDING THE COVER TAPE
AROUND THE OUTER
PERIPHERY IN A TURN.


Peeling Angle
165° to 180°



Empty Packaging Portion Empty

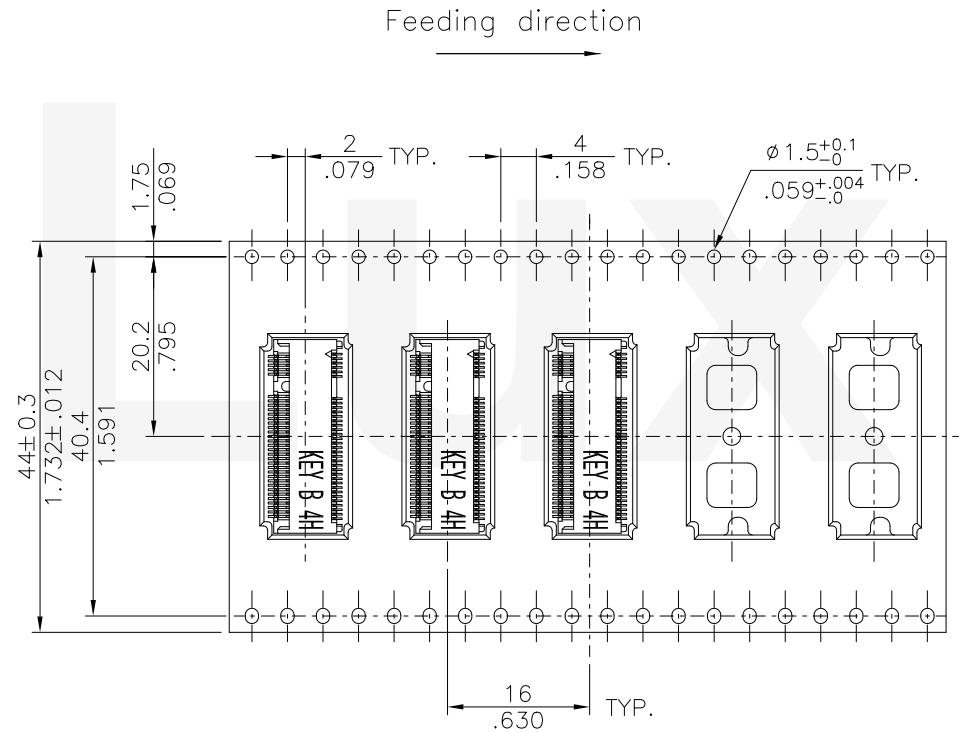

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
3				DRAWN BY: Sandy	1/05-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED	M.2 CONNECTOR KEY ID "B"	
2				ENGINEER: Sun	1/08-18'		MATERIAL:	
1				CHECKED BY: Eisle	1/09-18'		FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisle	1/09-18'			DRAWING NO. CS7601SA
								PART NO. CS76672AB0-RO
								SCALE 1 / 1
								SHEET 4 OF 4

