


Materials:

- * Insulator: LCP+30%G.F., UL 94V-0, Color Black
- * Cover: LCP+30%G.F., UL 94V-0, Color Black
- * Terminal: Phosphor Bronze,T=0.25mm;
- * Plating: 0.02μm(0.8μ) Gold Flash plated on contact area;
2.03μm(80μ") Min. Tin in solder area;
0.76μm(30μ") Min. Nickel underplating over all.

Ordering Code:


CS74 064 A 1 C 1
① ② ③ ④ ⑤ ⑥

- 1 Series No.
- 2 No. of Circuits:
- 3 Plating option:
A= Selective Gold flash plated over Nickel
- 4 Color: 1= Black
- 5 Tail style: C= PCB Clip Type
- 6 Option:
1= With Baffle & Solder tail Contact position 3.0mm


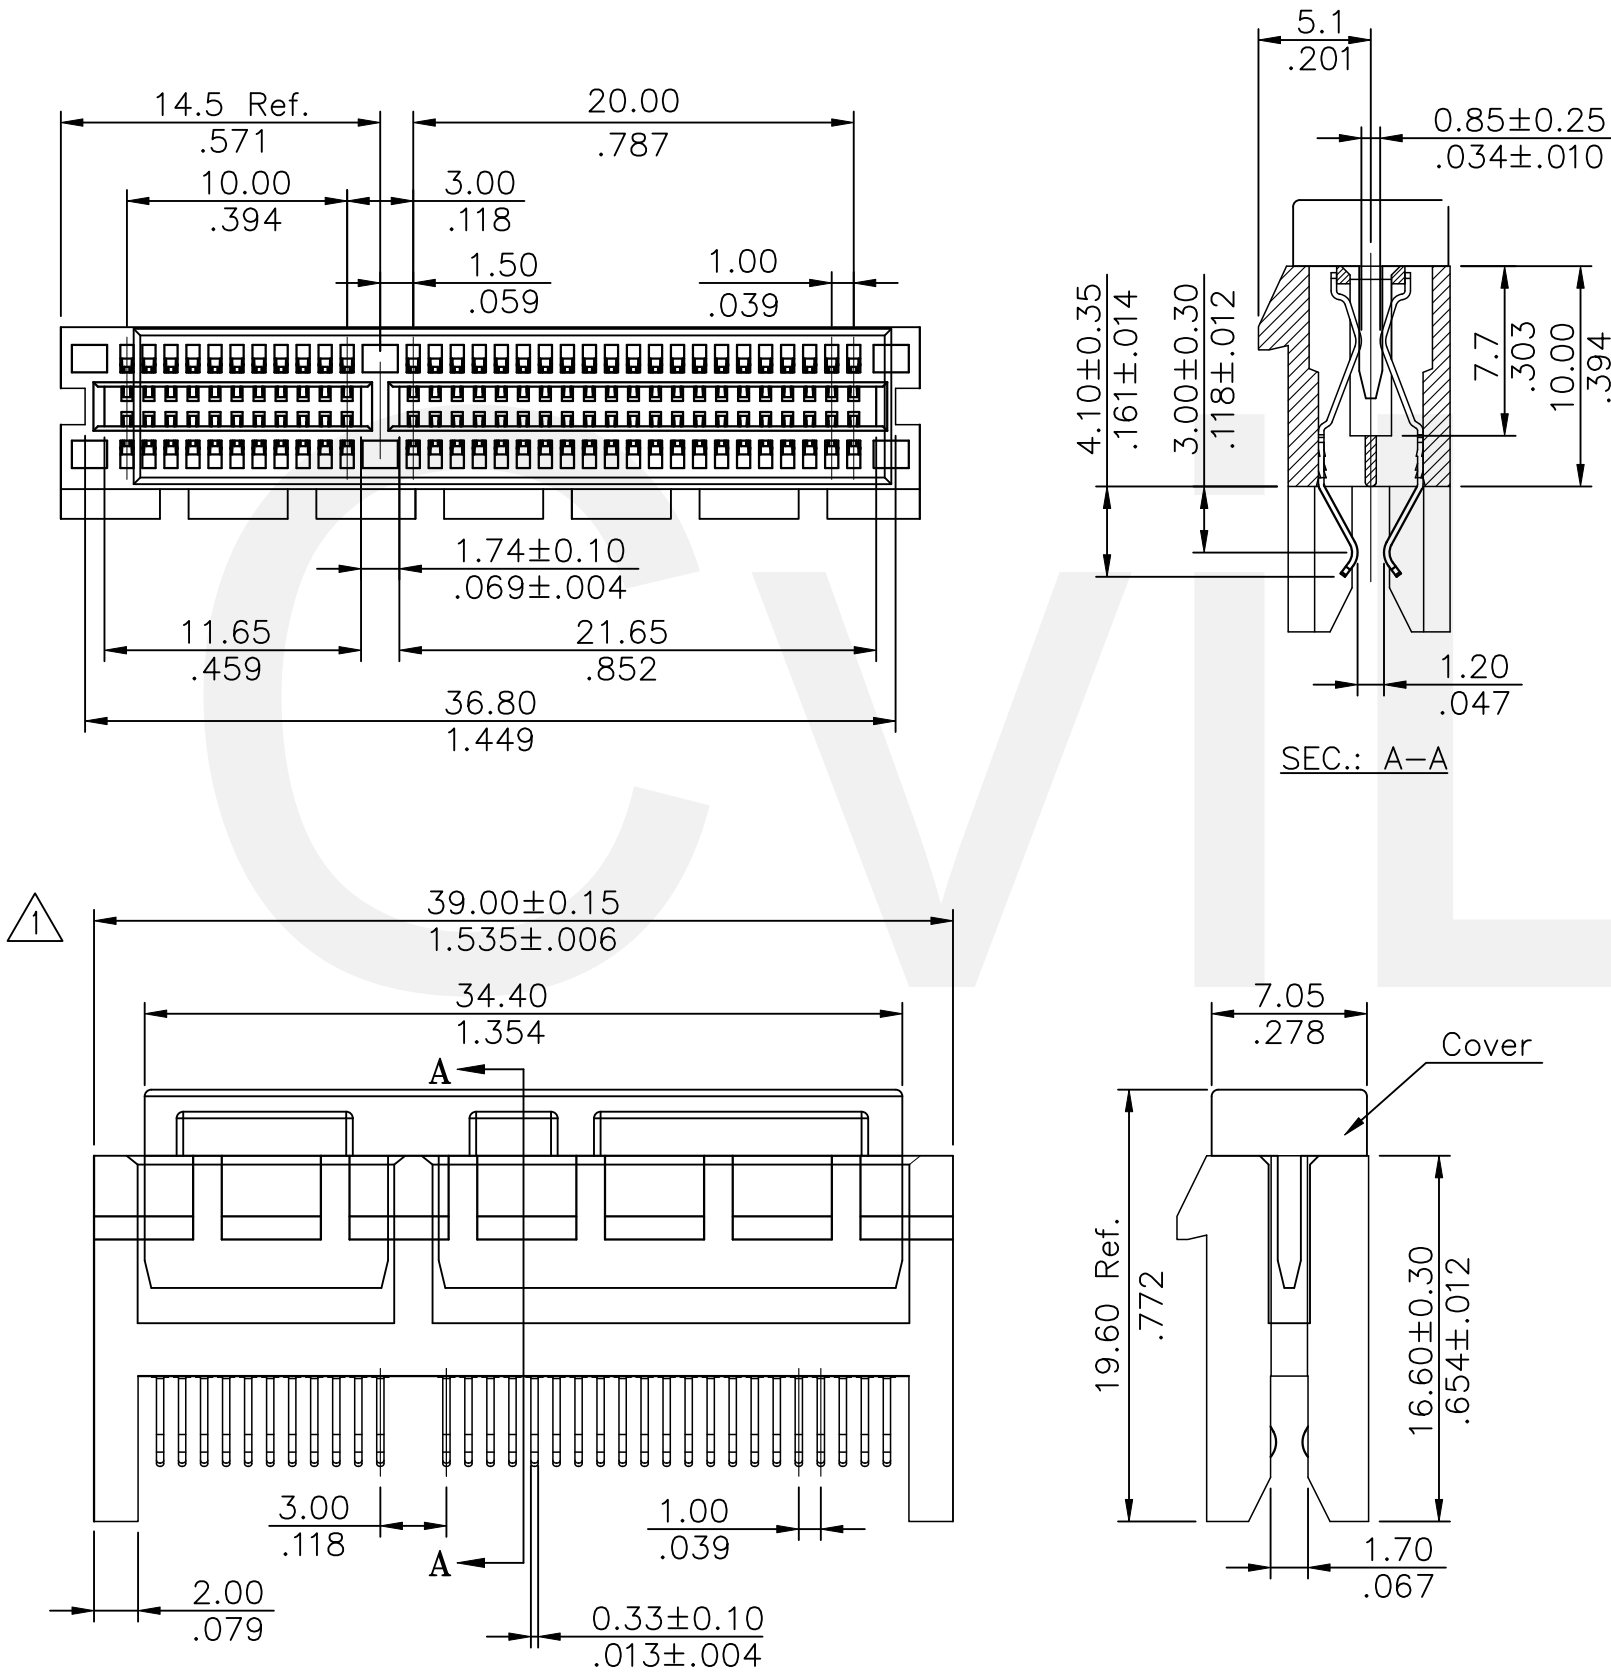


Lead Free Process RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE:	瀚荃股份有限公司 CviLux Corporation			
3							PCIe 64P PCB Clip Type				
2								DRAWING NO. CS7412SB PART NO. CS74064A1C1			
1	Jack	6/13-24'	ECNT124173/CS7412SB								
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/13-24'	FINISH:	SCALE	2 / 1	SHEET	1 OF 1

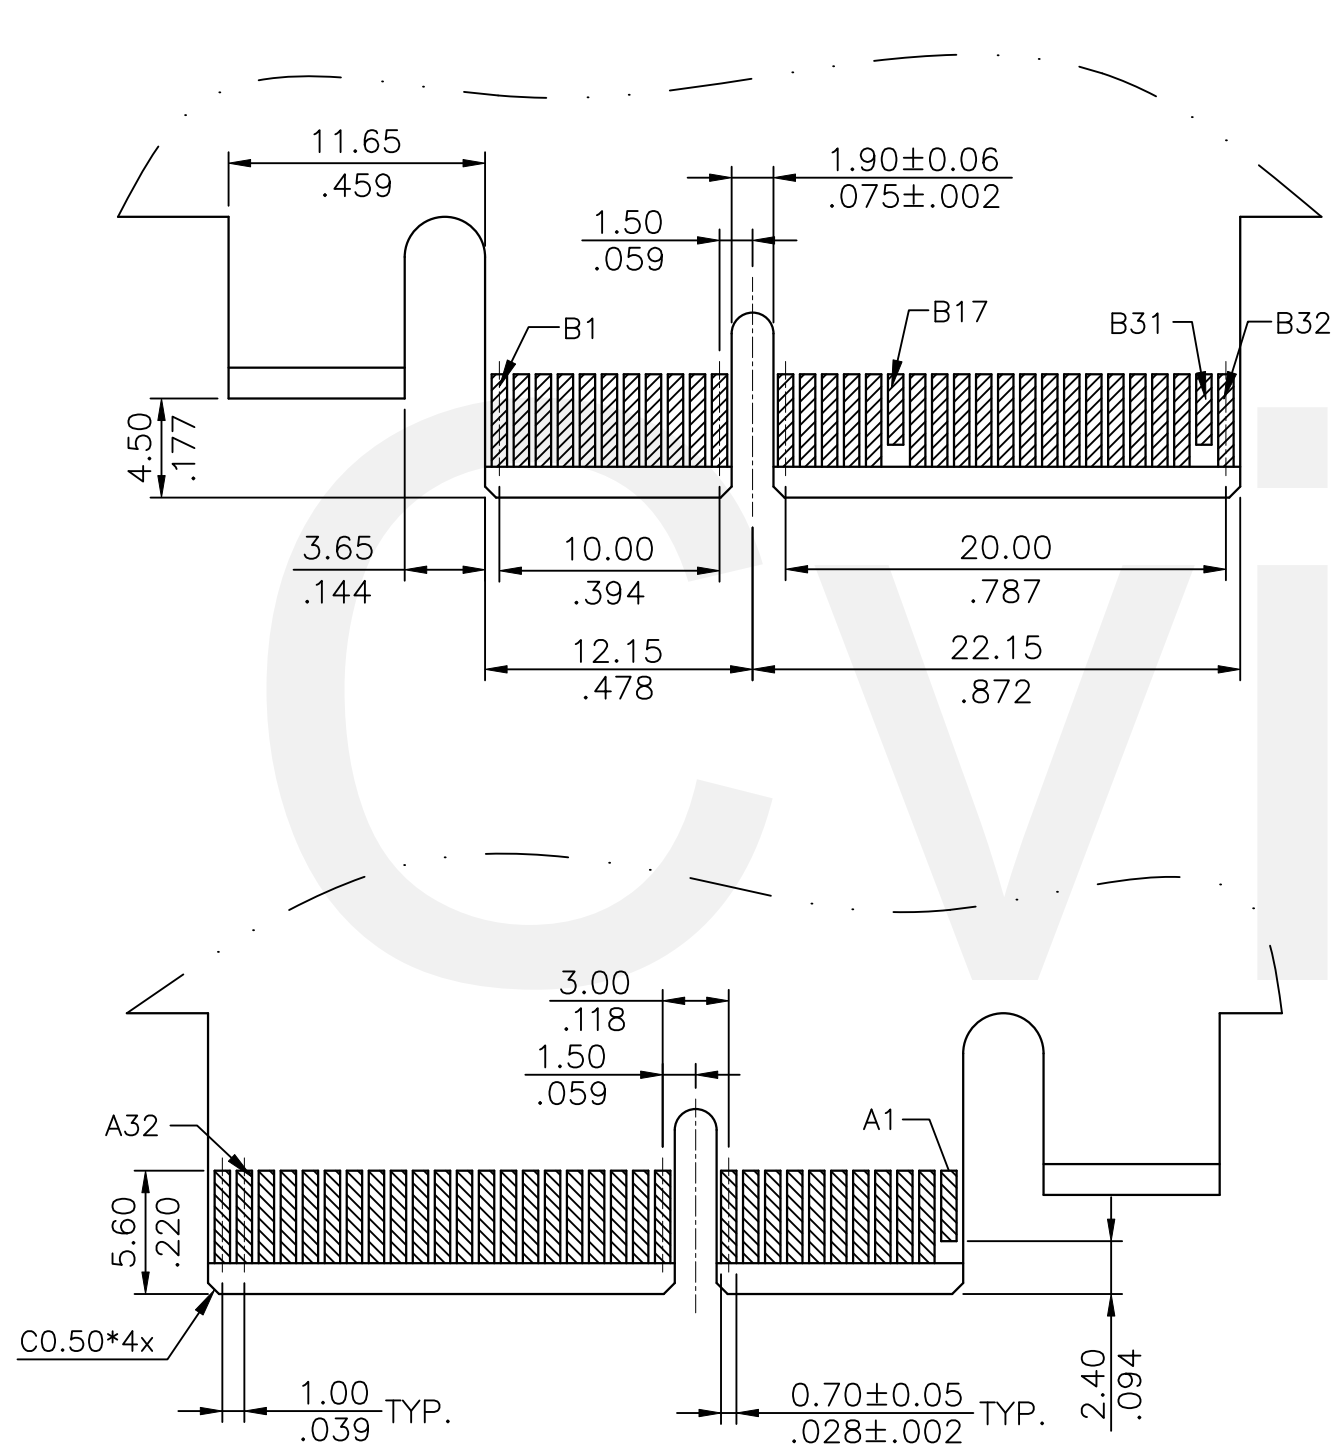

RECOMMENDED EDGE CARD
PATTERN(SECONDARY SIDE)

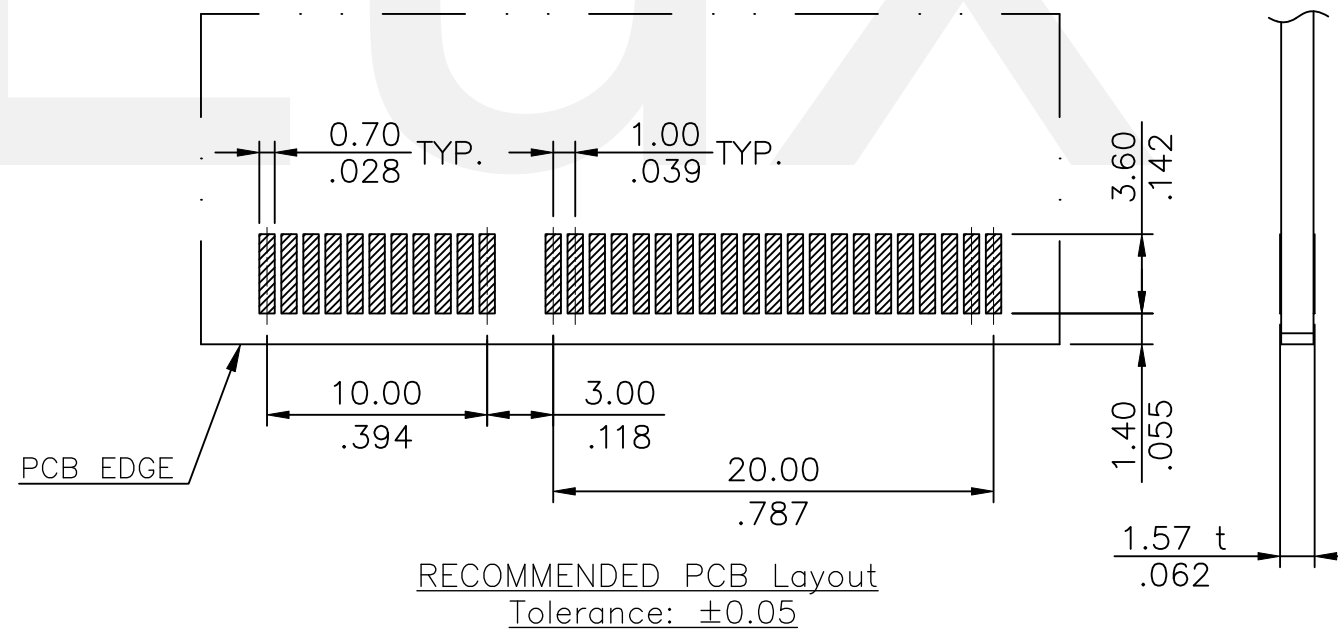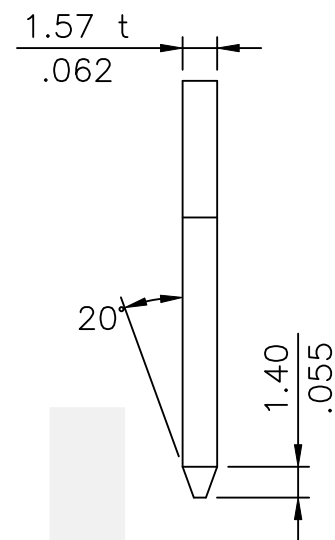

RECOMMENDED PCB Layout
Tolerance: ± 0.05

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Jack	6/13-24'	PCle 64P PCB Clip Type				
2					ENGINEER: Sun	6/13-24'	MATERIAL:	DRAWING NO. CS7412SB PART NO. CS74064A1C1			
1	Jack	6/13-24'	ECNT124173/ECNT124174		CHECKED BY: Eisley	6/13-24'	FINISH:				
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	6/13-24'		SCALE	2 / 1	SHEET	1 OF 1

