


Material :

Housing: PBT UL 94V-0, Nature Color
 Inner Plastic: PBT UL 94V-0, Red Color
 Seal Ring: Silicone Rubber
 Contact: Brass

Ordering Code:

CPB2 ** S 1 V *0 - LF
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits: 02, 03, 04 Pin
- ③ S= Single Row
- ④ 1= Matte Tin plated over Nickel
- ⑤ V= Vertical
- ⑥ Other Option: 00= Without Pin Kinked
K0= With Pin Kinked
- ⑦ LF= For Lead Free Wave flow Processes

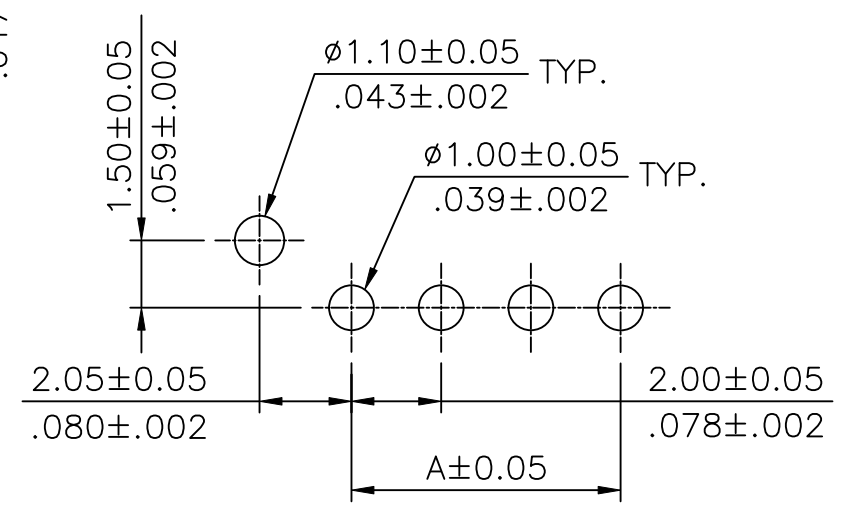

Recommended P.C. Board Layout

Circuits	Dimension	
	A	B
2	-	7.00(.275)
3	4.00(.157)	9.00(.354)
4	6.00(.236)	11.00(.433)

Lead Free Process
 RoHS Compliant

4				DATE	UNIT: mm / inch	TITLE:	瀚荃股份有限公司 CviLux Corporation
3			DRAWN BY: Joey	01/20-25'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CPB2 Series DIP V TYPE	
2			ENGINEER: Clark	01/20-25'	.X ± 0.30/.012 X' ± 1"	MATERIAL:	
1			CHECKED BY: Eisley	01/20-25'	.XX ± 0.20/.008 .X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	01/20-25'	.XXX ± 0.10/.004 .XX' ±	DRAWING NO. CPB214S1
							PART NO. CPB2**S1V*0-LF
							SCALE 3 / 1
							SHEET 1 OF 1

CviLux Corp
 2025/01/20
 ISSUED