
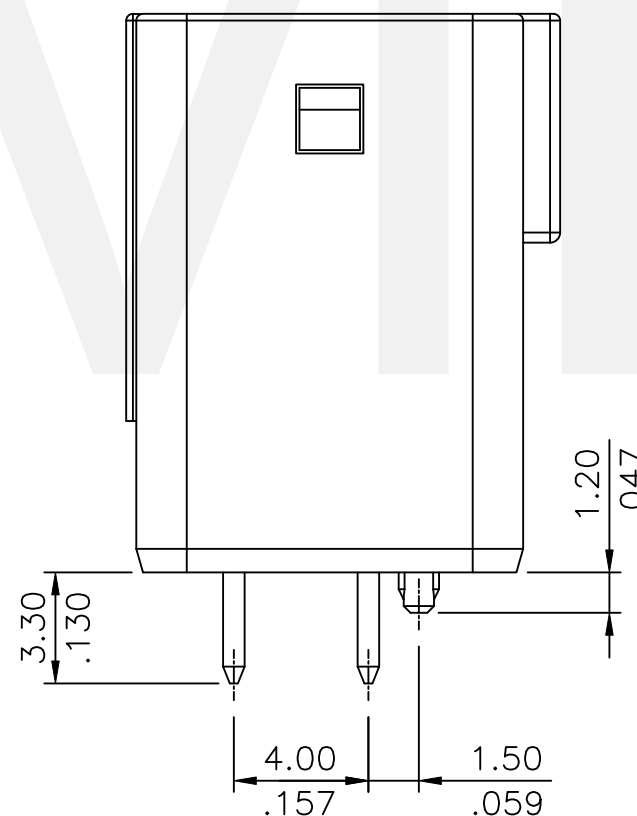
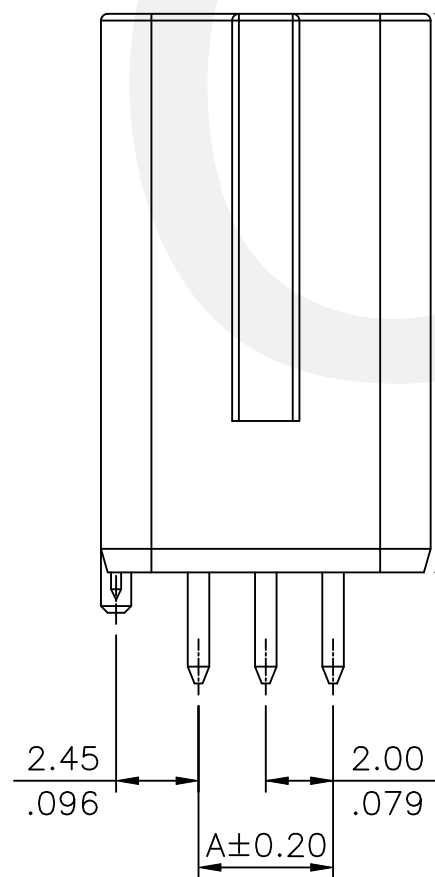
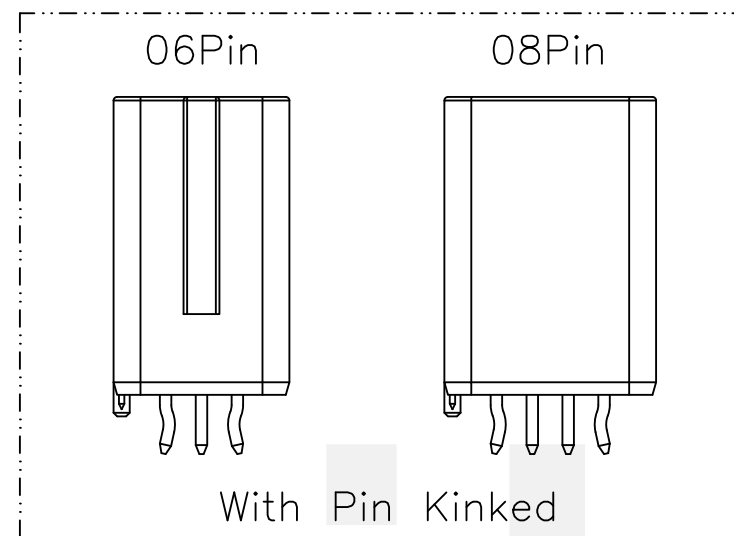


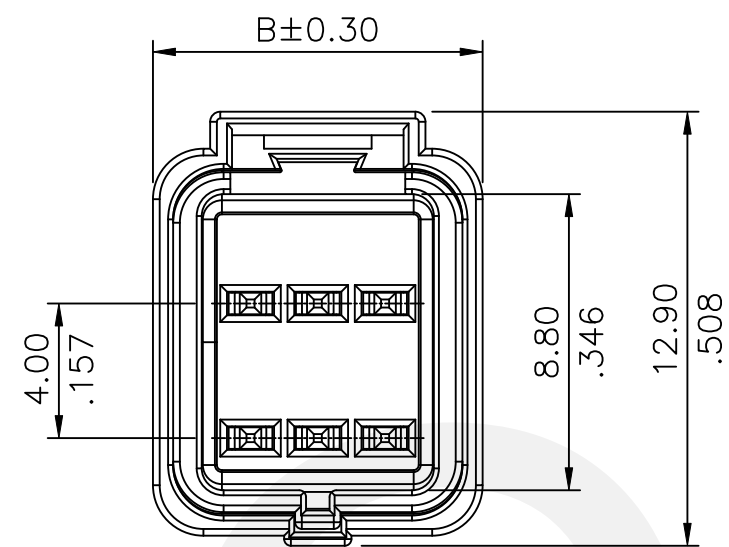

Circuits	Dimension	
	A	B
6	4.00(.157)	9.80(.385)
8	6.00(.236)	11.80(.464)


Material :

Housing: PBT UL 94V-0, Nature Color
Inner Plastic: PBT UL 94V-0, Red Color
Seal Ring: Silicone Rubber
Contact: Brass

Ordering Code:

CPB2 ** D 1 V *0 - LF
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② No. of Circuits: 06, 08 Pin
③ D= Dual Row
④ 1= Matte Tin plated over Nickel
⑤ V= Vertical
⑥ Other Option: 00= Without Pin Kinked
K0= With Pin Kinked
⑦ LF= For Lead Free Wave flow Processes

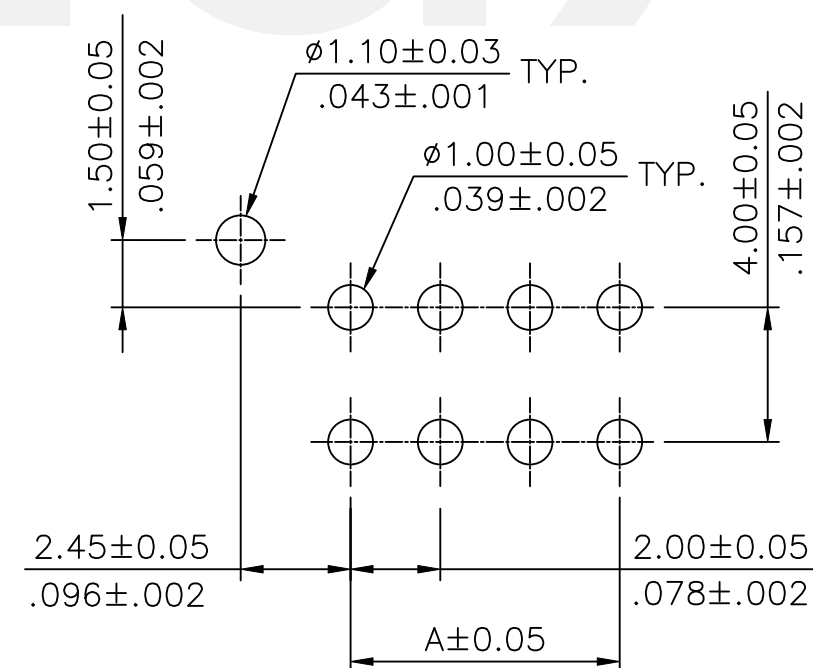

Recommended P.C.B Layout

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
3					DRAWN BY: Joey	7/17-25'	CPB2 Series DIP V TYPE				
2					ENGINEER: Clark	7/17-25'	MATERIAL:	DRAWING NO.	CPB216SA	PART NO.	CPB2**D1V*0-LF
1					CHECKED BY: Eisley	7/17-25'	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	7/17-25'					